

Geoffich Adver-

| A MANAGE OF AMERICAN AND AND AND AND AND AND AND AND AND A | | |
|--|---|------------|
| Opening Date: | 2013-08-02 | |
| Closing Date: | 2019-08-09 | |
| Closing Time: | 11:00 | |
| ARTHUR CATALOGIA | | |
| Institution Name: | Mbongolwane hospital | .Y |
| Province: | KwaZulu-Natal | |
| Department or Entity: | Department of Health | |
| Division or section: | Central Supply Chain Management | |
| Place where goods / services is required | AT CLINICS | |
| Date Submitted | 2019-08-01 | |
| TRACTOR WANTED SECTION | | |
| Quotation Number: | ZNO: ZNO 191 2019/20 | |
| Item Category: | Goods | |
| Hem Description: | SUPPLY, DELIVER AND IMSTAEL | |
| | HIGH DENSITY CABINATE. SAMUNGU CLINIC X 05 NGUDWINI CLINIC X 04 | |
| | N.B. SPECIFICATION IS ATTACHED ON THE DOCUMENT | |
| | | |
| | | |
| Quantity (if supplies) | | |
| . COM the Mark to provide the $\S \times \Re T$ | All controls | |
| Select Type: | Not Applicable | M |
| Date: | | ٧ |
| Time: | | |
| Venue: | | |
| QUOTES CAN BE COLLECTED FROM: | SUPPLY CHAIN OFFICE AT (SFORES) | |
| QUOTES SHOULD BE DEUVERSO TO: | MBONGOLWANE HOSPITAL ON TENDERBOX NEXT TO C.E.O OFFICE. II SHOOULD BE ON A SEALED ENVELOP AND MUSTBE MARKED WITH A | Г <u>.</u> |
| 。 (1996年) 特别人的特别(1917) (第1) | 15-15-34 (178-174 - 312) | |
| Name: | Mr. S HGUBANE | |
| Email: | mzikavise otuli@kanhealth.gov.za | |

mzikayise.ntuli@kanhealth.gov.za

Print Preview


Submit Save Save As... Close


Contact Number: (035) 476 6008


Finance Manager Name: Mr. E.5 Mgobhozi


Finance Manager Signature:

No late quotes prill be adjute od Contact of Contact o
















NOTE:

- · Sizes above calculated using 400mm deep units.
- 360mm units are also available but cannot be used with pull-out components.
- Tandem Bays (2,3,4 etc. Wide) are available in all combination of bays ie. 2,3,4,5,6 etc. bays.
- Infinite possibilities are available dependent on floor space

der Hi-Density?

the user to make use of vertical height — costly floorspace is maximised,

he user a myriad of internal component combinations dependant on the storage application.

components can be simply adjusted at any time making use of multiple setting options on the side of the cabinet. y of finish options are available to enhance the overall aesthetic of the area in which the cabinets are being installed.



Get Sorted!


HES! ==1>

andard)

ів Стеу

rative ting -Hal al Extra)

orative iding -ninate nal Extra)

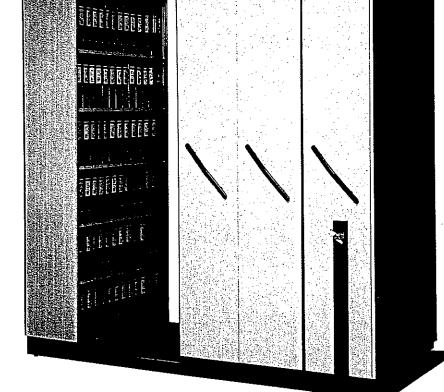








- · Used when referencing documents within
- Should be positioned immediately below a shelf.
- Use only one Pull-Out Working Shelf per two filing bays.




Pull-Out Stationary Drawer

- · Used for the storage of stationary, CD's etc.
- Must be fitted directly below a Shelf.
- · Fitted with a lock as a standard feature.



Lockable Shelf Door

- · Is an independently lockable cabinet within a bay.
- · Used as a Security Cabinet.



Pull-Out Plan Filing Cradle

- Used mainly for A0 plans.
- · Has 5 x binders per cradle.
- Each binder holds 30 to 40 plans.