

KZN HEALTH

KZN Health Intranet

Search this site

HOME

CORPORATE INFORMATION

COMPONENTS DIRECTORY

DISTRICT OFFICES

HEALTH FACILITIES

٥

KZN Health > Components > Supply Chain Management

AdvertQuote

KWAZULU-NATAL PROVIN	
HEALTH REPUBLIC OF SOUTH AFRICA	Quotation Advert
Opening Date:	2021-01-27
Closing Date:	2021-02-04
Closing Time:	11:00
INSTITUTION DETAILS	
Institution Name:	Benedictine hospital
Province:	KwaZulu-Natal
Department or Entity:	Department of Health
Division or section:	Central Supply Chain Management
Place where goods / services is required	Maintenance
Date Submitted	2021-01-27
ITEM CATEGORY AND DETAILS	
Quotation Number:	ZNQ:
Item Category:	Services 🗸
Item Description:	1. Renovation of building - Pharmacy 2. 2GB CIBD grading allowed 3.Document / specification attached 3.Provide your own PPE's in a site meeting
Quantity (if supplies)	
COMPULSORY BRIEFING SESSION /	SITE VISIT
Select Type:	Both
Date:	
Time:	2021-01-29
Venue:	09H00 Sisters Lounge
QUOTES CAN BE COLLECTED FROM:	Download from website
QUOTES SHOULD BE DELIVERED TO:	To be deposited in the tender box next to PRO office ONLY
ENQUIRIES REGARDING THE ADVE	RT MAY BE DIRECTED TO:
Name:	Phakathi AA
Email:	hlengiwe.mthembu@kznhealth.gov.za
Contact Number:	035 8317062

Finance Manager Name:

Finance Manager Signature:

Gumede PN

No late quotes will be considered

STANDARD QUOTE DOCUMENTATION SUPPLY CHAIN MANAGEMENT OVER R30 000.00 YOU ARE HEREBY INVITED TO QUOTE FOR REQUIREMENTS AT BENEDICTINE HOSPITAL DATE ADVERTISED: 27 / 01 / 2021 CLOSING DATE: 04 / 02 / 2021 CLOSING TIME: 11:00 FACSIMILE NUMBER: n/a E-MAIL ADDRESS: n/a PHYSICAL ADDRESS: Vryheid road, Nongoma 3950 ZNQ NUMBER: 359 / 20-21 DESCRIPTION: Renovation of building-Pharmacy CONTRACT PERIOD ONCE OFF VALIDITY PERIOD 60 Days SARS PIN. (if applicable) CENTRAL SUPPLIER DATABASE REGISTRATION (CSD) NO. UNIQUE REGISTRATION REFERENCE DEPOSITED IN THE QUOTE BOX SITUATED AT (STREET ADDRESS) Tender box is next to PRO office ONLY due to covid 19 Bidders should ensure that quotes are delivered timeously to the correct address. If the quote is late, it will not be accepted for consideration. The quote box is open from 08:00 to 15:30. ALL QUOTES MUST BE SUBMITTED ON THE OFFICIAL FORMS - (NOT TO BE RE-TYPED) THIS QUOTE IS SUBJECT TO THE PREFERENTIAL PROCUREMENT POLICY FRAMEWORK ACT AND THE PREFERENTIAL PROCUREMENT REGULATIONS, 2011, THE GENERAL CONDITIONS OF CONTRACT (GCC) AND, IF APPLICABLE, ANY OTHER SPECIAL CONDITIONS OF CONTRACT. THE FOLLOWING PARTICULARS MUST BE FURNISHED (FAILURE TO DO SO WILL RESULT IN YOUR QUOTE BEING DISQUALIFIED) NAME OF BIDDER POSTAL ADDRESS STREET ADDRESS TELEPHONE NUMBER CODE......NUMBER...... FACSIMILE NUMBER CODENUMBER..... CELLPHONE NUMBER E-MAIL ADDRESS VAT REGISTRATION NUMBER (If VAT vendor) HAS A B-BBEE STATUS LEVEL VERIFICATION CERTIFICATE BEEN SUBMITTED? (SBD 6.1) YES NO

[A B-BBEE STATUS LEVEL VERIFICATION CERTIFICATE/SWORN AFFIDAVIT (FOR EMES& QSEs) MUST BE SUBMITTED IN ORDER TO QUALIFY FOR PREFERENCE POINTS FOR B-BBEE]

DEPARTMENT OF HEALTH
BENEDICTINE HOSPITAL

27 -01- 2021

PRIVATE BAG X5007 NONGOMA 3950

OFFICIAL P	RICE PAGE ON: REN	FOR QUOTATIONS OVATION OF PHA	ARMAC	Y	ZNQ NUMBER	359 / 20-21		•
SIGNATURE	OF BIDDER	I hereby agree to all terms and c	***********		DATE		,,,,,,	
CAPACITY I	JNDER WHI	CH THIS QUOTE IS SIGNED						••••••
Item No	Quantity	Description			Brand &	Country of	Price	
					model	manufacture	R	c
1.	Service	RENOVATION OF	PHARMAC	Υ				
			·····					
		NB: CIDB grading 2GB pl	us allowed t	o tender				
		specification a	attached					
					w			
			7 10			· ·		
							1	
		Value			,			
					\.Z			
			••				******	
····								
				····				
								-
								
			·····					
VALUE AF	DED TAY @	15% (Only if VAT Vendor)			:		<u></u>	-
		RICE (VALIDITY PERIOD 60 Day	/s)					+
		Vith The Specification?				N.S. / S.A.B.S. Specif	ication?	
ls The Price	Firm?		State Deli	very Period I	E.G. <i>E.G.</i> 1day, ⁻	1week		
Contact Pe	rson:Phak	e <u>quote</u> may be directed to: athi AA _{Tel} :035.8; iwe.mthembu@kznhe	1	•		ical information may		

DECLARATION OF INTEREST

1. Any legal person, including persons employed by the state¹, or persons having a kinship with persons employed by the state, including a blood relationship, may make an offer or offers in terms of this invitation to quote (includes a price quotation, advertised competitive quote,

con Act b) any	r national or provincial departmer stitutional institution within the me , 1999 (Act No. 1 of 1999); r municipality or municipal entity;	nt, national or provincial public entity o aning of the Public Finance Managemen	t d) national Assembly e) Parliament.	y or the national Council of provinces	
	bidder	Signature	Position	Date	
	EPT THAT THE STATE E TO BE FALSE.	MAY REJECT THE QUOTE	OR ACT AGAINST	ME SHOULD THIS DEC	CLARATION
M.S.Z. MANTHE	and global terminal sections.	E) S 2.		CERTIFY THAT TI	HE INFORMATION
no	t be considered and passed DECLARATION	up-to-date and verified on CSD. over as non-compliant according			•
NB: Th	e Department Of Health will	tees / members / shareholders. validate details of directors / tru			
2.12. Do or	you or any of the directors / not they are bidding for this	'trustees / shareholders / member	s of the company have	any interest in any other rela	ted companies whether YES NO
2,11. Ar en	e you, or any person connec aployed by the state who ma	ted with the bidder, aware of any by be involved with the evaluation	relationship (family, frie and or adjudication of t	and, other) between any other this quote?	bidder and any person YES NO
2.10. Do ma	you, or any person connecta by be involved with the evalu	ted with the bidder, have any relai uation and or adjudication of this q	ionship (family, friend, uote?	other) with a person employe	yes NO
2.9. Die sta	d you or your spouse, or any ate in the previous twelve mo	y of the company's directors / trus	tees / snarenoiders / n	nembers or their spouses cor	nduct business with the
	iro to eubmit proof of such a	ons for non-submission of such p	cult in the disqualificat	ion of the quote.)	- a - 2 - 3×3×22 3
2,8.2. j	if you are presently employe n the public sector?	nstitution:d by the state, did you obtain the	appropriate authority t		
Nai Nai	me of state institution at which	tee / shareholder/ member: ch you or the person connected to	the bidder is employe	d:	***************************************
en 2.8. Ar	nployee / persal numbers mo e you or any person connec	ustees / shareholders / members, ust be indicated in paragraph 3 be ted with the bidder presently emp	low.		bers and, if applicable, K APPLICABLE] YES NO
2.2. lde 2.3. Po	entity Number:osition occupied in the Comp	ativeative director, trustee, shareholde	2.5. Tax Reference	Number:	
2. In o	order to give effect to the abo	ove, the following questionnaire m	ust be completed and	submitted with the quote.	
÷ - :::	the bidder is employed by th the legal person on whose l evaluation and or adjudication		gned, has a relationsh nown that such a relat	tionship exists between the p	erson or persons for or
em	ployed by the state, or to p	riew of possible allegations of favour ersons connected with or related ion to the evaluating/adjudicating	to them, it is required		

() The Bay server seed to be a server of the server of the

SPECIAL CONTRACT CONDITIONS OF QUOTATIONS

1. AMENDMENT OF CONTRACT

1.1. Any amendment to or renunciation of the provisions of the contract shall at all times be done in writing and shall be signed by both parties.

2. CHANGE OF ADDRESS

2.1. Bidders must advise the Department of Health (institution where the offer was submitted) should their address (domicilium citandi et executandi) details change from the time of bidding to the expiry of the contract.

3. GENERAL CONDITIONS ATTACHED TO THIS QUOTATION

- 3.1. The institution is under no obligation to accept the lowest or any quote.
- 3.2. The price quoted must include VAT (if VAT vendor). However, it must be noted that the department reserves the right to evaluate all quotations excluding VAT as some bidders may not be VAT vendors.
- 3.3. The bidder must ensure the correctness & validity of quote:
 - that the price(s), rate(s) & preference quoted cover all for the work/item (s) & accept that any mistakes regarding the price (s) & calculations will be at the bidder's risk
- 3.4. The bidder must accept full responsibility for the proper execution & fulfilment of all obligations conditions devolving on under this agreement, as the Principal (s) liable for the due fulfilment of this contract.
- 3.5. This quotation will be evaluated based on the 80/20 points system, specification & correctness of information. All required documentation must be completed in full and submitted.
- 3.6. Offers must comply strictly with the specification.
- 3.7. Only offers that meet or are greater than the specification will be considered.
- 3.8. Late quotes will not be considered.
- 3.9. Expired product/s will not be accepted. All products supplied must be valid for a minimum period of six months.
- 3.10. A bidder not registered on the Central Suppliers Database or verification has failed will not be considered.
- 3.11. All delivery costs must be included in the quote price, for delivery at the prescribed destination.
- 3.12. Only firm prices will be accepted. Such prices must remain firm for the contract period. Non-firm prices (including rates of exchange variations) will not be considered.
- 3.13. In cases where different delivery points influence the pricing, a separate pricing schedule must be submitted for each delivery point.
- 3.14. In the event of a bidder having multiple quotes, only the cheapest according to specification will be considered. Furthermore a verification will be done to identify if bidders have multiple companies and are quoting (cover-quoting) for this bid. In such instances only the cheapest bid according to specification will be considered.

4. SPECIAL INSTRUCTIONS AND NOTICES TO BIDDERS REGARDING THE COMPLETION OF THIS QUOTATION.

- 4.1. Unless inconsistent with or expressly indicated otherwise by the context, the singular shall include the plural and vice versa and with words importing the masculine gender shall include the feminine and the neuter.
- 4.2. Under no circumstances whatsoever may the quotation/bid forms be retyped or redrafted. Photocopies of the original bid documentation may be used, but an original signature must appear on such photocopies.
- 4.3. The bidder is advised to check the number of pages and to satisfy himself that none are missing or duplicated.
- 4.4. Quotation submitted must be complete in all respects.
- 4.5. Any alteration made by the bidder must be initialled.
- 4.6. Use of correcting fluid is prohibited
- 4.7. Quotation will be opened in public as soon as practicable after the closing time of quotation.
- 4.8. Where practical, prices are made public at the time of opening quotations.
- 4.9. If it is desired to make more than one offer against any individual item, such offers should be given on a photocopy of the page in question. Clear indication thereof must be stated on the schedules attached.

5. SPECIAL INSTRUCTIONS REGARDING HAND DELIVERED QUOTATIONS

- 5.1. Quotation shall be lodged at the address indicated not later than the closing time specified for their receipt, and in accordance with the directives in the quotation documents.
- 5.2. Each quotation shall be addressed in accordance with the directives in the quotation documents and shall be lodged in a separate sealed envelope, with the name and address of the bidder, the quotation number and closing date indicated on the envelope. The envelope shall not contain documents relating to any quotation other than that shown on the envelope. If this provision is not complied with, such quotations/bids may be rejected as being invalid.
- 5.3. All quotations received in sealed envelopes with the relevant quotation numbers on the envelopes are kept unopened in safe custody until the closing time of the quotation/bids. Where, however, a quotation is received open, it shall be sealed. If it is received without a quotation/bid number on the envelope, it shall be opened, the quotation number ascertained, the envelope sealed and the quotation number written on the envelope.
- 5.4. A specific box is provided for the receipt of quotations, and no quotation found in any other box or elsewhere subsequent to the closing date and time of quotation will be considered.

13. PENALTIES

- 13.1. If at any time during the contract period, the service provider is unable to perform in a timely manner, the service provider must notify the institution in writing/email of the cause of and the duration of the delay. Upon receipt of the notification, the institution should evaluate the circumstances and, if deemed necessary, the institution may extend the service provider's time for performance.
- 13.2. In the event of delayed performance that extends beyond the delivery period, the institution is entitled to purchase commodities of a similar quantity and quality as a substitution for the outstanding commodities, without terminating the contract, as well as return commodities delivered at a later stage at the service provider's expense.
- 13.3. Alternatively, the institution may elect to terminate the contract and procure the necessary commodities in order to complete the contract. In the event that the contract is terminated the institution may claim damages from the service provider in the form of a penalty. The service provider's performance should be captured on the service provider database in order to determine whether or not the service provider should be awarded any contracts in the future.
- 13.4. If the supplier fails to deliver any or all of the goods or to perform the services within the period(s) specified in the contract, the purchaser shall, without prejudice to its other remedies under the contract, deduct from the contract price, as a penalty, a sum calculated on the delivered price of the delayed goods or unperformed services using the current prime interest rate calculated for each day of the delay until actual delivery or performance.

14. TERMINATION FOR DEFAULT

- 14.1. The purchaser, without prejudice to any other remedy for breach of contract, by written notice of default sent to the supplier, may terminate this contract in whole or in part:
- (i) if the supplier fails to deliver any or all of the goods within the period(s) specified in the contract,
- (ii) if the supplier fails to perform any other obligation(s) under the contract; or
- (iii) if the supplier, in the judgment of the purchaser, has engaged in corrupt or fraudulent practices in competing for or in executing the
- 14.2. In the event the purchaser terminates the contract in whole or in part, the purchaser may procure, upon such terms and in such manner as it deems appropriate, goods, works or services similar to those undelivered, and the supplier shall be liable to the purchaser for any excess costs for such similar goods, works or services.
- 14.3. Where the purchaser terminates the contract in whole or in part, the purchaser may decide to impose a restriction penalty on the supplier by prohibiting such supplier from doing business with the public sector for a period not exceeding 10 years.
- 15. FAILURE TO COMPLY WITH ABOVE WILL RESULT IN YOUR QUOTE BEING PASSED OVER.

PREFERENCE POINTS CLAIM FORM IN TERMS OF THE PREFERENTIAL PROCUREMENT REGULATIONS 2017

This preference form must form part of all quotes invited. It contains general information and serves as a claim form for preference points for Broad-Based Black Economic Empowerment (B-BBEE) Status Level of Contribution

NB: BEFORE COMPLETING THIS FORM, BIDDERS MUST STUDY THE GENERAL CONDITIONS, DEFINITIONS AND DIRECTIVES APPLICABLE IN RESPECT OF B-BBEE, AS PRESCRIBED IN THE PREFERENTIAL PROCUREMENT REGULATIONS, 2017.

1. GENERAL CONDITIONS

- 1.1 The following preference point systems are applicable to all quotes:
 - the 80/20 system for requirements with a Rand value of up to R50 000 000 (all applicable taxes included); and
- 1.2 The value of this quote is estimated to not exceed R50 000 000 (all applicable taxes included) and therefore the 80/20 preference point system shall be applicable.
- 1.3 Points for this quote shall be awarded for:
 - (a) Price: and
 - (b) B-BBEE Status Level of Contributor.
- 1.4 The maximum points for this quote is allocated as follows:

The maximum points for this quote is anocated as follows.	CB F # # A RE.	
	POINTS	
PRICE	80	
B-BBEE STATUS LEVEL OF CONTRIBUTOR	20	
Total points for Price and B-BBEE must not exceed	100	

- 1.5 Failure on the part of a bidder to submit proof of B-BBEE Status level of contributor together with the quote, will be interpreted to mean that preference points for B-BBEE status level of contribution are not claimed.
- 1.6 The purchaser reserves the right to require of a bidder, either before a quote is adjudicated or at any time subsequently, to substantiate any claim in regard to preferences, in any manner required by the purchaser.

2. DEFINITIONS

- (a) "B-BBEE" means broad-based black economic empowerment as defined in section 1 of the Broad-Based Black Economic Empowerment Act;
- (b) "B-BBEE status level of contributor" means the B-BBEE status of an entity in terms of a code of good practice on black economic empowerment, issued in terms of section 9(1) of the Broad-Based Black Economic Empowerment Act;
- (c) "bid" means a written offer in a prescribed or stipulated form in response to an invitation by an organ of state for the provision of goods or services, through price quotations, advertised competitive bidding processes or proposals;
- (d) "Broad-Based Black Economic Empowerment Act" means the Broad-Based Black Economic Empowerment Act, 2003 (Act No. 53 of 2003);
- (e) "EME" means an Exempted Micro Enterprise in terms of a code of good practice on black economic empowerment issued in terms of section 9 (1) of the Broad-Based Black Economic Empowerment Act;
- (f) "functionality" means the ability of a tenderer to provide goods or services in accordance with specifications as set out in the tender documents.
- (g) "prices" includes all applicable taxes less all unconditional discounts;
- (h) "proof of B-BBEE status level of contributor" means:
 - 1) B-BBEE Status level certificate issued by an authorized body or person;
 - 2) A sworn affidavit as prescribed by the B-BBEE Codes of Good Practice;
 - Any other requirement prescribed in terms of the B-BBEE Act;
- (i) "QSE" means a qualifying small business enterprise in terms of a code of good practice on black economic empowerment issued in terms of section 9 (1) of the Broad-Based Black Economic Empowerment Act;
- (j) "rand value" means the total estimated value of a contract in Rand, calculated at the time of bid-invitation, and includes all applicable taxes;

3. POINTS AWARDED FOR PRICE

3.1 THE 80/20 PREFERENCE POINT SYSTEMS

A maximum of 80 points is allocated for price on the following basis:

$$Ps = 80 \left(1 - \frac{Pt - P \min}{P \min} \right)$$
 Where

Ps = Points scored for price of bid under consideration

Pt = Price of bid under consideration
Pmin = Price of lowest acceptable bid

4. POINTS AWARDED FOR B-BBEE STATUS LEVEL OF CONTRIBUTOR

4.1 In terms of Regulation 6 (2) and 7 (2) of the Preferential Procurement Regulations, preference points must be awarded to a bidder for attaining the B-BBEE status level of contribution in accordance with the table below:

B-BBEE Status Level of Contributor	Number of points (80/20 system)
1	20
2	18
3	14
4	12
5	8
6	6
7	4
8	2
Non-compliant contributor	0

		TION

1.1.1

7.040054

Maring to

Therefore 4.5 Vice B. 1997

- 5.1 Bidders who claim points in respect of B-BBEE Status Level of Contribution must complete the following:
- 6. B-BBEE STATUS LEVEL OF CONTRIBUTOR CLAIMED IN TERMS OF PARAGRAPHS 1.4 AND 4.1
- 6.1 B-BBEE Status Level of Contributor: =(maximum of 20 points)

(Points claimed in respect of paragraph 7.1 must be in accordance with the table reflected in paragraph 4.1 and must be substantiated by relevant proof of B-BBEE status level of contributor.

7.	SUB-CONTRACTING	(Tick applicable box)
7.1	Will any portion of the contract be sub-contracted?	YES NO
7.1.1	If yes, indicate:	
	i) What percentage of the contract will be subcontracted	
8.	Whether the sub-contractor is an EME or QSE	(Tick applicable box)

iv) Specify, by ticking the appropriate box, if subcontracting with an enterprise in terms of Preferential Procurement Regulations, 2017:


Designated Group: An EME or QSE which is at last 51% owned by:

EME

QSE

Designated Group: An EME or QSE which is at last 51% owned by:	EME	QSE
Market Control of the	√ .	_
Black people		
Black people who are youth	•	
Black people who are women		
Black people with disabilities		
Black people living in rural or underdeveloped areas or townships		
Cooperative owned by black people		
Black people who are military veterans		
OR		
Any EME		
Any QSE		

9.	DECLARATION WITH REGARD TO COMPANY/FIRM								
9.1	Name of company/firm:								
9.2	VAT registration number:								
9.3	Company registration number:								
9.4	TYPE OF COMPANY/ FIRM [TICK APPLICABLE BOX]								
	 □ Partnership/Joint Venture / Consortium □ One person business/sole propriety □ Close corporation □ Company □ (Pty) Limited 								
9.5	DESCRIBE PRINCIPAL BUSINESS ACTIVITIES								
		n							
9.6	COMPANY CLASSIFICATION [TICK APPLICABLE BOX Manufacturer Supplier Professional service provider Other service providers, e.g. transporter, etc.	· · · · · · · · · · · · · · · · · · ·							
9.7	Total number of years the company/firm has been in bus	iness:							
9.8		so on behalf of the company/firm, certify that the points claimed, based on aphs 1.4 and 6.1 of the foregoing certificate, qualifies the company/ firm for							
	i) The information furnished is true and correct;								
	ii) The preference points claimed are in accordance with the General Conditions as indicated in paragraph 1 of this form;								
	iii) In the event of a contract being awarded as a result of points claimed as shown in paragraphs 1.4 and 6.1, the contractor may be required to furnish documentary proof to the satisfaction of the purchaser that the claims are correct;								
	iv) If the B-BBEE status level of contributor has been claimed or obtained on a fraudulent basis or any of the conditions of contract have not been fulfilled, the purchaser may, in addition to any other remedy it may have –								
55	(a) disqualify the person from the bidding process;								
		d or suffered as a result of that person's conduct;							
		ich it has suffered as a result of having to make less favourable							
	who acted on a fraudulent basis, be restricted to	pareholders and directors, or only the shareholders and directors by the National Treasury from obtaining business from any organ of the sudi alteram partem (hear the other side) rule has been							
	(e) forward the matter for criminal prosecution.								
	WITNESSES	SIGNATURE(S) OF BIDDERS(S)							
	1	DATE:							
		ADDRESS							
	2	AUDICES							
		•							
		9 70.0							



FIGHTING DISEASE, FIGHTING POVERTY, GIVING HOPE

PAINTING OF WALLS, REPLACING OF VINYL SHEET ALSO INSTALLATION OF 2 MAIN CODED DOORS (RENOVATION) IN PHARMACY.

(TECHNICAL SPECIFICATIONS)

Artisan Painter: B.M. MBATHA

Foreman: S.B. Dlamini (Hospital Foreman)

Institution: Benedictine Hospital

PROJECT SPECIFICATION

The work to be carried out in terms of this section of the project comprises the supply and installation of all the materials necessary, as per the Schedule of Rates

PART 1

1.1. SCOPE OF WORK

- 1.1.1 Cleaning and preparation of wall for painting.
- 1.1.2 Painting of walls
- 1.1.3 Replacing of floor tiles with Vinyl sheet
- 1.1.4 Supplying and installation of 7 tier industrial shelving.

PAINTING OF WALLS, REPLACING OF VINYL SHEET, ALSO INSTALLATION OF 2 MAIN CODED DOORS (RENOVATION) IN PHARMACY.

PART 2

2.1 TECHNICAL SPECIFICATION

This TECHNICAL SPECIFICATION shall be read in conjunction with all other sections of the SPECIFICATION and cognisance shall be taken of the clauses relevant to these particular renovations, whether any specific clauses are referred to or not. NB. Contract period for this work 08 weeks.

Part 3

- 3.1 Requirements.
- 3.1.1. CIDB grading = 2GB plus
- 3.1.2. The contractor to submit Trade Test Certificate together with documents for the person who will monitor the work and will be onsite every day. (This will be considered on evaluation and awarding).
- 3.1.3. The contractor to submit work plan.
- 3.1.4. The contractor to return fully filled Bill of Quantity.
- 3.1.5. The contractor to comply with EPWP projects specification.

4.1. MATERIALS:

- 4.1.1 Proprietary materials where specified are to be of the brand specified or other approved by the Department.
- 4.1.2 All primers, emulsion paints, enamels, stains, varnishes, etc. are to comply with the relevant SANS specification. Paints, etc. shall be suitable for application on the surfaces to which they are being applied and those used externally shall be of exterior quality or suitable for exterior use. For any particular work the priming coat and subsequent coats of paint are to be executed with paints from the same manufacturer and in accordance with that manufacturer's instructions.
- 4.1.3 The materials are to be brought to the site in unopened containers and no adulteration will be permitted, except thinners of a quantity and quality directed by the manufacturer.
- 4.1.4 The Department shall at all times be permitted to take samples for testing purposes from open containers of any brand of paint being used on the work.
- 4.1.5 All materials, if and when required by the Department, will be subject to tests by the South African
 Bureau of Standards, and the cost of such tests, should the material under test not meet the
 requirements of this specification, shall be borne by the Contractor. Fillers and stoppings are to be
 suitable for use with the material being filled or stopped and to the approval of the Department.

4.2. PREPARATORY WORK:

- 4.2.1 All new and existing surfaces are to be thoroughly dry and are to be cleaned of all dust, dirt, grease, oil, rust, scale, efflorescence, fungus, loose or flaking material, etc. rubbed down, stopped, filled, knotted and sanded smooth as required in accordance with the paint manufacturer's recommendations and to the approval of the Department prior to the application of paint, etc.
- 4.2.2 Asbestos cement shall be primed with an approved alkali resistant primer before the application of subsequent coats which are not, in themselves, alkali resistant.
- 4.2.3 Iron, steel and other ferrous metals shall be cleaned in accordance with SANS Code of Practice 064 to remove rust, scale, grease, oil, etc. and the surface brought to a bright metallic condition. Galvanized iron and zinc shall be cleaned in accordance with SANS Code of Practice 062 to remove the manufacturer's temporary protective coating, white rust, etc.
- 4.2.4 Other non-ferrous metals shall be thoroughly cleaned to remove all milling oils, temporary protective coatings, etc. and the surface abraded with fine water-paper and white spirit.
- 4.2.4 Woodwork to be painted shall have all knots and resinous areas treated with an approved knotting, the surface shall then be primed and all holes, etc. stopped and rubbed down smooth,
- 4.2.5 Woodwork to be oiled, stained, varnished, etc. shall be free of all stains, pencil marks and other surface discolorations and all holes, etc. stopped with tinted stopping and rubbed down smooth.
- 4.2.6 In preparing existing glazed sashes and sash doors, all loose putty is to be removed, the rebates primed and glass re-sprigged and re-puttied as necessary before the painting is commenced.

- 4.2.7 Previously distempered or lime washed surfaces to receive any other type of paint, are to have the existing distemper or lime wash completely removed by scraping or wire brushing and the surf aces treated with an approved bonding liquid.
- 4.2.8 Where existing paint film are in good condition any flaking or bared patches are to be properly feathered into the surrounding paint and spot primed as necessary.
- 4.2.9 Where existing paint films are in poor condition and require to be removed completely, they are to be removed by means of wire brushing, paint remover, burning off, or other approved method.
- 4.2.10 Paint removers shall be free of wax and caustic substances and shall preferably be of water rinse able type. When burning off paint from wood, care must be taken to avoid charring the wood.
- 4.2.11 The final state of preparatory work to existing decorated surfaces shall in all cases produce in the finished decorated surfaces a condition similar to new work.
- 4.2.12 The Contractor will be held responsible for the proper and adequate preparation of the surfaces and any work which fails to meet the manufacturer's recommendations must be made good at the Contractor's expense to the satisfaction of the Department.

4.3. APPLICATION OF PAINTS, ETC.

- 4.3.1 Painting may be carried out by brush, roller or spray as recommended by the manufacturer and to the approval of the Department. All paints, etc. are to be applied in strict accordance with the manufacturer's instructions. Each coat of paint is to be adequately and permanently keyed onto the previous coat or surface and shall be evenly distributed and continuous and shall dry to a smooth film, free from sags, runs or other imperfections. Each coat of paint is to be of a colour distinctive from previous or succeeding coats.
- All painting must be done in accordance with a colour scheme which will be provided by the Department rates for painting etc. are to include for all cutting in of contrasting colours and masking as required. No distinction has been made where more than one colour of the same material is required on the walls or ceiling of the same room.
- 4.3.3 Samples of colours for the final coats are to be prepared in all cases to the approval of the Department and all work must be finished to the approved colours.
- 4.3.4 Backs of wood door and similar frames and the surfaces of other new or prefixed joinery in contact with brickwork, etc. and built in as the work proceeds, shall be primed or sealed before building in to prevent moisture seeping into the wood from the mortar bedding.
- 4.3.5 Tongued and grooved and rebated edges of boards in batten doors and other such like inaccessible parts of new joinery shall, before assembly, be primed, or where the joinery is to receive a finish other than paint, be given one coat of such other finishing material.

4.3.6 All new external structural timbers shall be primed before the timbers are fixed in position and shall include all surfaces such as backs of fascia's and barge boards.

4.4. PAINTWORK TO PREVIOUSLY PAINTED PREPARATORY WORK EXISTING SURFACES

- 4.4.1 All previously painted surfaces must be sanded and thoroughly washed down and allowed to dry completely before paints is applied. Blistering or peeling shall be completely removed and cracks shall be opened, filled with suitable filler and finished smooth.
- 4.4.2 Previously painted metal surface shall be thoroughly rubbed and cleaned down. Blistered or peeling shall be completely removed.
- 4.4.3 Previously painted wood surface shall be thoroughly cleaned down, Blistered or peeling paint shall be peeling paint shall be completely removed and cracks and crevices shall be primed, filled with suitable filler and finished smooth.

4.5. RATES:

- 4.5.1 Rates for painting, etc. are to include for all preparatory work, and where spraying is employed, are to include or adequately masking all surrounding areas.
- 4.5.2 Where diameters of pipes are stated these are the nominal internal diameters, and rates for painting pipes are to include for painting the holder bats, hangers, clips, etc. supporting the pipes.
- 4.5.3 Rates are to include for providing all necessary dust sheets, covers, etc. taking all necessary precautions to prevent marking the surfaces of joinery, walls, floors, glass, electrical fittings, etc. All surfaces disfigured or otherwise damaged shall be completely renovated or replaced as necessary to approval of the Department at the Contractor's own expense.

SCHEDULE OF RATES

5. WORK TO BE DONE AND SCHEDULE OF PRICES: BENEDICTINE HOSPITAL

Item	DESCRIPTION	UNI T	QTY	RATI	E/ UNIT	тот	4L
				R	С	R	С
	NOTE: All rates for items contained in this Schedule of Prices must be filled excluding the applicable Value Added Tax. All prices shall include labour and transport. The Administration reserves the right to Negotiate prices in the Bill of Quantities 1. The contractor to provide their own water and electricity 2. The contractor is not allowed to sleep on site 3. The contractor is not allowed to work during the			The state of the s			

				 		
	weekends					
	4. All rubbles must be removed and the contractor to comply with OHS Act					
	5. The contractor to give a safety plan and work hand in					
	hand with Hospital safety officer(This will be			}		
	considered on evaluation)					
	6. The contractor to bring safety plan.					
	INSTITUTION: BENEDICTINE HOSPITAL	 				
	PROPRIETARY ARTICLES:			 		
	All equipment and material used in this contract shall be that					
	which is specified or other approved by SABS.					
EDIA						
EPV	/P Program		4	 		
1.	Allow for complying with the Project EPWP Specification	Sum	1			
					1	
				1		<u> </u>
Mair	n passage PS2 (Inside painting)					
1.	Prepare wall also supply and paint sure coat white	m ²	99			
1.	undercoat SUC1.	1111				
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m²	99			
3.	Also prepare and painting of ceiling board with SABS	m ²	48			
ა.	Approved PVA.	1111-	40			
STO	RE ROOM 1 PS3(Inside painting)					
	Prepare wall also supply and paint sure coat white	<u> </u>		 ļ		
1.	undercoat SUC1.	m ²	52			
2	Supply and paint 2 coats for Cashmere 15 years product	m ²	52	 		
2.	guarantee B2-2 Ocean Sault.		52			
2	Also prepare and painting of ceiling board with SABS	m ²	27			
3.	Approved PVA.	1111-	21			
	PROCESS	· ·				
	Remove all existing floor tiles, the contractor shall carefully					
	clean up the place and floors must be clean and free of					
	obstacles before starting to work.			***************************************		
	and the state of t					
	LAYING: All floor coverings and skirting to be laid by					
4.	workmen experienced in laying the particular type of floor	m ²	27			
	, , , , , , , , , , , , , , , , , , , ,	[""	-'			
	covering. In strict accordance with the instructions issued by					
	the Manufacturer of the materials being used.					
	All adhesive must be the correct adhesives as supplied as					
	All adhesive must be the correct adhesives as supplied or			****		
	recommended by the manufacturer of the material being					
	used.	1				

			T				
	Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.						
WANTED TO THE TOTAL THE TOTAL TO THE TOTAL TOTAL TO THE T	ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2				To an extensive state of the st		The second secon
	WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.	The state of the s					
VIII.	POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.		eger dynamical				
STO	RE ROOM 2 PS4(Inside painting and vinyl sheeting)						
1.	Prepare wall also supply and paint sure coat white undercoat SUC1.	m ²	52	<u> </u>			
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m ²	52				
3.	Also prepare and painting of ceiling board with SABS Approved PVA.	m ²	27	Landing			
	PROCESS Remove all existing floor tiles, the contractor shall carefully clean up the place and floors must be clean and free of obstacles before starting to work.						
4.	LAYING: All floor coverings and skirting to be laid by workmen experienced in laying the particular type of floor covering. In strict accordance with the instructions issued by the Manufacturer of the materials being used.	m ²	27	<u> </u>		e monte de la constante de la	
400000000000000000000000000000000000000	All adhesive must be the correct adhesives as supplied or recommended by the manufacturer of the material being used.			Lucia de seconomiento			

		·					
And the state of t	Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.	- content of the cont					
	ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2				19900		TO THE PARTY OF TH
CONTRACTOR	WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.						
MANAGEMENT -	POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.						
STO	RE ROOM 3 PS5(Inside painting and vinyl sheeting)				,		
1.	Prepare wall also supply and paint sure coat white undercoat SUC1.	m²	52				
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m²	52				
3.	Also prepare and painting of ceiling board with SABS Approved PVA.	m ²	27			in the second se	
	PROCESS Remove all existing floor tiles, the contractor shall carefully clean up the place and floors must be clean and free of obstacles before starting to work.		· · · · · · · · · · · · · · · · · · ·		and the state of t	i vi secoli pian	
4.	LAYING: All floor coverings and skirting to be laid by workmen experienced in laying the particular type of floor covering. In strict accordance with the instructions issued by the Manufacturer of the materials being used.	m²	27	- Transfer of the state of the	- Control and Associated and Associa	- The state of the	
	All adhesive must be the correct adhesives as supplied or recommended by the manufacturer of the material being						

	used.	T			T	ļ	
	useu.						
	Floor sheeting : Supply and fix 2.0/2.5mm thick 1.2m wide						
	Marley Super flex fully flexible vinyl floor sheeting						
	manufactured to SABS Specification.						
	Thandractured to OADO Opecinication.						
	ADHESIVE : Use Marley No 60 Acrylic Adhesive spread						
	, , , , , , , , , , , , , , , , , , , ,						
	with notched trowel having 1.5mm x 1.5mm x 1.5mm						
	triangular notches at 4.0mm centers at the rate of between						
	5.5m 2 and 6.5m 2						
	NA/ELDING DODG: Walded shoot fleering is to boye the						
	WELDING RODS: Welded sheet flooring is to have the					200	
	seams welded together by approved process to form the						
	seamless floor or lining. Patterned sheet floorings are to be						
	matched at joints. Vinyl skirting and edging strips are to be						
1	fully bonded to the backing surfaces. Marley Super flex may,						
	24hours after installation be welded using Marley Welding						
	Rod.						
	POLISHING: The newly laid floor should after 72hours are						
	scrubbed with diluted neutral detergent complying with						
	SABS825 and thoroughly rinsed. Three coats of a water						
	based floor dressing complying with SABS 1042.						
		<u></u>					
	RE ROOM 4 IV FLUID PS6(Inside painting and vinyl						
shee				ļ			
1.	Prepare wall also supply and paint sure coat white	m ²	44				
	undercoat SUC1.	<u> </u>					
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m ²	44				
	Also prepare and painting of ceiling board with SABS						
3.	Approved PVA.	m ²	20				
	PROCESS			1	-		
	Remove all existing floor tiles, the contractor shall carefully				***************************************		
	clean up the place and floors must be clean and free of						
1	obstacles before starting to work.					-	
	obolicolo olaring to work.						1
4.	LAYING: All floor coverings and skirting to be laid by	m ²	20				
	workmen experienced in laying the particular type of floor						
	covering. In strict accordance with the instructions issued by						
	the Manufacturer of the materials being used.				1		}
1	the Manufacturer of the Materials being used.						
L				<u> </u>			<u> </u>

	All adhesive must be the correct adhesives as supplied or recommended by the manufacturer of the material being						
	used.						S. C.
**************************************	Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.						11 W + 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2				The same of the sa	- December 1	- Annual Control of the Control of t
- Andrews Advances in the Control of	WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.		***************************************	The state of the s			
	POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.	TO THE PARTY OF TH				2.000	
	ATIANT DOTAL idea in the continuo						August and a second a second and a second an
1N P/	ATIANT PS7(Inside painting and vinyl sheeting) Prepare wall also supply and paint sure coat white	m ²	50				
2.	undercoat SUC1. Supply and paint 2 coats for Cashmere 15 years product	m ²	50				
	guarantee B2-2 Ocean Sault. Also prepare and painting of ceiling board with SABS	m ²	25				
3.	Approved PVA.		20				
4.	PROCESS Remove all existing floor tiles, the contractor shall carefully clean up the place and floors must be clean and free of obstacles before starting to work.	m ²	25				
10045	LAYING: All floor coverings and skirting to be laid by workmen experienced in laying the particular type of floor covering. In strict accordance with the instructions issued by the Manufacturer of the materials being used.	VALUE TO SALE				Š Š	

		Γ		1		
recommended by the manufacturer of the material being				and the state of t		
Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.	The state of the s			Linkshower	Advisor of the state of the sta	
ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2	under der eine Germannen			· · · · · · · · · · · · · · · · · · ·		
WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.	ANNOUNCE TO THE PARTY OF THE PA	- COMPANIES	LANGUAGO CONTRACTOR CO	000000000000000000000000000000000000000	- And Andrews -	
POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.		Manager of the Control of the Contro		***************************************	- The state of the	in the second
Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION						
RFID Controller: > Working voltage: DC 12V±10% > Temperature: -10° C-55°C > Max User Capacity: 4000 > Reading distance 5-15cm > Card type: ID Card > Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x 0.83"	ITE M	02	de desperadores de la constante de la constant	- department - dep	- the management	And the second s
	Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: ➤ Working voltage: DC 12V±10% ➤ Temperature: -10° C-55°C ➤ Max User Capacity: 4000 ➤ Reading distance 5-15cm ➤ Card type: ID Card ➤ Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x	recommended by the manufacturer of the material being used. Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: Working voltage: DC 12V±10% Temperature: -10° C-55° C Max User Capacity: 4000 Reading distance 5-15cm Card type: ID Card Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x	recommended by the manufacturer of the material being used. Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: > Working voltage: DC 12V±10% > Temperature: -10° C-55° C > Max User Capacity. 4000 > Reading distance 5-15cm > Card type: ID Card > Size: Approx. 108 x 85 x 21mm/ 4.25 x 3.35 x	recommended by the manufacturer of the material being used. Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: > Working voltage: DC 12V±10% > Temperature: -10° C-55°C > Max User Capacity: 4000 > Reading distance 5-15cm > Card type: ID Card > Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x	recommended by the manufacturer of the material being used. Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: Working voltage: DC 12V±10% Temperature: -10° C-55° C Max User Capacity: 4000 Reading distance 5-15cm Card type: ID Card Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x	recommended by the manufacturer of the material being used. Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification. ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2 WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod. POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS 45 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042. Supplying of 2 doors 813 x 2032 x 40mm solid. 1½ pairs butt hinges. Multiple access ways for host controller. Support card, password, password and card. SPECIFICATION RFID Controller: Working voltage: DC 12V±10% Temperature: -10° C-55°C Max User Capacity: 4000 Reading distance 5-15cm Card type: ID Card Size: Approx. 108 X 85 X 21mm/ 4.25 x 3.35 x


	Electric magnetic lock:							
	Material: aluminium							-
	➢ Size: Approx. 170 x 38 x 20mm/							-
	> 6.69 x 1.50 x 0.79							l
	➢ Voltage: DC 12V	4						l
	Working temperature:-10° C-55°C	***************************************						
	➤ Working humidity: 0-90%							
	➤ Holding power: 280 KGS, 380KGS							-
	Maximum card distance: 10-15cm							
	Power supply:							
	DC Output: DC 12V 3A							l
	AC Input: AC110V 240V 50-60Hz							
	➤ Temperature: -20°C -65°C							-
	➢ Size: Approx. 113 x 68 x 33mm/							1
	> 4.45 x 68 x 1.30"	***************************************						
	Exit button:							
	Material plastic							l
	➤ Size: Approx.86 x 86mm /3.39 x 3.39"							l
	> Power rating: 3A/36V DC							
	Package includes:							-
	> 1 x host controller		-					
	> 1 x electric magnetic lock		***************************************					
	> 1 x door switch				ļ			
	> 1 x power supply						-	
	➤ 5 x card							l
	➤ 5 x key fob							l
	> 1 x screws set							-
	➤ 1 x user manual.							-
070	DECOFFICE DOMESTIC STATE OF THE							1
	RES OFFICE PS8(Inside painting and vinyl sheeting) Prepare wall also supply and paint sure coat white					-		1
1.	undercoat SUC1.	m ²	46		- Landan Andreas			
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m ²	46		-			
3.	Also prepare and painting of ceiling board with SABS	m ²	19	1				
	Approved PVA.							
	PROCESS							
4.	Remove all existing floor tiles, the contractor shall carefully	m ²	19					
	clean up the place and floors must be clean and free of							
1								

	obstacles before starting to work.					
***************************************	LAYING: All floor coverings and skirting to be laid by workmen experienced in laying the particular type of floor covering. In strict accordance with the instructions issued by the Manufacturer of the materials being used.			9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		
	All adhesive must be the correct adhesives as supplied or recommended by the manufacturer of the material being used.		economic production and the seconomic product			
	Floor sheeting: Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.		- delication		Tablestooper of	
	ADHESIVE: Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2		- Carlotte and Car		www.chinosa.com	
	WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.		d and a second s	1	a social property and the second seco	1
	POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.	i versona primaria di				
TOIL	ET PS9(Inside painting and tiling)					
1.	Prepare wall also supply and paint sure coat white undercoat SUC1.	m²	7			
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m ²	7			
3.	Also prepare and painting of ceiling board with SABS Approved PVA.	m²	2.4			
4.	Prepare Am x 4.2m floor also supplying and installation of GN 573 330 x 330 Johnson Granite floor tiles including 100mm	m ²	2.4			
				 +		†

	skirting. Tile fixer 6hrs.					
KITC	HEN PS10(Inside painting and tiling)			.=	1	
1,	Prepare wall also supply and paint sure coat white undercoat SUC1.	m ²	46			
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m²	46			
3.	Also prepare and painting of ceiling board with SABS Approved PVA.	m ²	12		444	
MAN	AGER'S OFFICE PS11(Inside painting and tiling)					
1.	Prepare wall also supply and paint sure coat white undercoat SUC1.	m ²	36			
2.	Supply and paint 2 coats for Cashmere 15 years product guarantee B2-2 Ocean Sault.	m ²	36			
3.	Also prepare and painting of ceiling board with SABS Approved PVA.	m ²	12			
4.	Prepare 4m x 4.2m floor also supplying and installation of GN 573 330 x 330 Johnson Granite floor tiles including 100mm skirting. Tile fixer 6hrs	m ²	12			0.00
	Dispatch PS12(Inside painting and tiling) Prepare wall also supply and paint sure coat white	m ²	46			
1. 2.	undercoat SUC1. Supply and paint 2 coats for Cashmere 15 years product	m ²	46			
3.	guarantee B2-2 Ocean Sault. Also prepare and painting of ceiling board with SABS Approved PVA.	m ²	19		W. W	
4.	PROCESS Remove all existing floor tiles, the contractor shall carefully clean up the place and floors must be clean and free of obstacles before starting to work. LAYING: All floor coverings and skirting to be laid by workmen experienced in laying the particular type of floor covering. In strict accordance with the instructions issued by the Manufacturer of the materials being used.	m²	19			
	All adhesive must be the correct adhesives as supplied or recommended by the manufacturer of the material being used.	s de la constante de la consta				

ļ, ·

	Floor sheeting : Supply and fix 2.0/2.5mm thick 1.2m wide Marley Super flex fully flexible vinyl floor sheeting manufactured to SABS Specification.	- de succession :	1	LIA-STANDARD THE T	- months against the second	- AND	77.00
	ADHESIVE : Use Marley No 60 Acrylic Adhesive spread with notched trowel having 1.5mm x 1.5mm x 1.5mm triangular notches at 4.0mm centers at the rate of between 5.5m 2 and 6.5m 2	and the second second	is discovered to	i sheriya ke	- Contract of the Contract of		
	WELDING RODS: Welded sheet flooring is to have the seams welded together by approved process to form the seamless floor or lining. Patterned sheet floorings are to be matched at joints. Vinyl skirting and edging strips are to be fully bonded to the backing surfaces. Marley Super flex may, 24hours after installation be welded using Marley Welding Rod.		00000000	The control of the co			A CARLES AND A CAR
	POLISHING: The newly laid floor should after 72hours are scrubbed with diluted neutral detergent complying with SABS825 and thoroughly rinsed. Three coats of a water based floor dressing complying with SABS 1042.						
Supp	lying and installation shelving cubicle PS13						
1.	 Supplying and installation of light weight powder coated metal heavy duty 7 tier shelving units to all store rooms. BIGDUG Garage shelving 7 level boltless storage. Value garage shelving-flexible all-purpose boltless shelving. Dimensions 1780mm High x 900mm Wide x 350mm Depth. NB. (The contractor will be advised where the installation to be made) 	UNI T	60				
	350 900			ļ			W. W
<u> </u>		I	:				

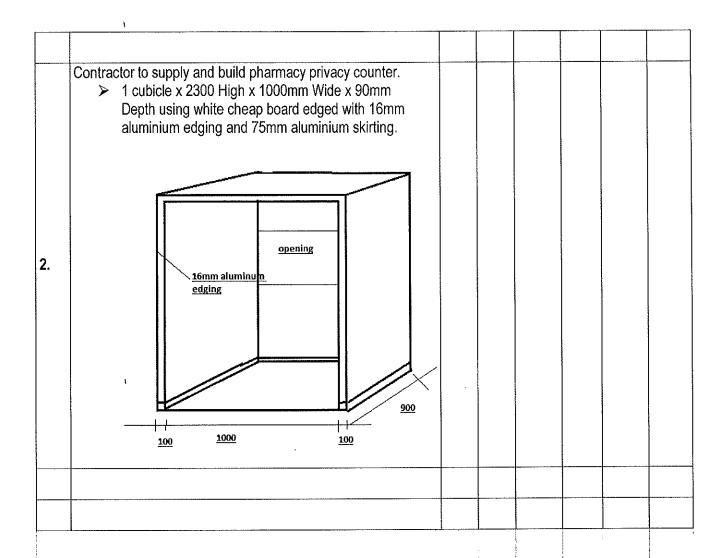

COLLECTION SUMMARY

INSTITUTION: BENEDICTINE HOSPITAL

PROJECT: PAINTING OF WALLS, REPLACING OF VINYL SHEET ALSO INSTALLATION OF 2 MAIN CODED DOORS (RENOVATION) IN PHARMACY.

NOTE:

THIS COLLECTION SUMMARY MUST BE COMPLETED IN FULL BY THE CONTRACTORAND RETURNED TOGETHER WITH THE TENDER FORM.

Collection Summary PS 1	R		
Collection Summary PS 2	R	an and an	i i
Collection Summary PS 3	R		
Collection Summary PS 4	R		

Collection Summary	PS 5	R	
Collection Summary	PS 6	R	
Collection Summary	PS 7	R	
Collection Summary	PS 8	R	
Collection Summary	PS 9	R	
Collection Summary	PS 10	R	
Collection Summary	PS 11	R	
Collection Summary	PS 12	R	
SUB-TOTAL		R	
ADD Provision for Value Allow 15% of SUB-TO			
TOTAL: CARRIED TO	FORM	R	