

UGU DISTRICT: MURCHISON HOSPITAL: ALTERATIONS AND RENOVATIONS OF STAFF ACCOMMODATION

VOLUME 2



UGU DISTRICT: MURCHISON HOSPITAL: ALTERATIONS AND RENOVATIONS OF STAFF ACCOMMODATION

ANNEXURE 1



KWAZULU-NATAL DEPARTMENT OF HEALTH

STANDARD PREAMBLES TO ALL TRADES

REV 3 – JANUARY 2009

Compiled by:
Department of Health
Infrastructure Development
Engineering Services
Private Bag X9051
PIETERMARITZBURG
3201

INDEX

1.	ALTERATIONS	1
	Site Visit	
	Materials from the Alterations	
	Asbestos Regulations 2001	
	Notice of Disconnections	
	Dust	
	Shoring	
	Matching Existing Work	
	Forming New Openings etc in Existing Walls	
2.	EARTHWORKS	. 2
	Site Clearance	
	Excavations	
	Water	
	Working Space	
	Risk of Collapse	
	Filling, etc	
	Compaction of Filling, etc	
	Protection against Subterranean Wood-destroying Termites	5
	Re-use of Excavated Material	6
	Demolitions	6
	Grass Planting and Turfing	6
3.	CONCRETE, FORMWORK AND REINFORCEMENT	
0.	Interpretations	8
	Definitions	
	Materials	_
	Reinforcement	
	Form Work	
	Concrete Quality	
	Transportation and Placing	
	Construction Joints	
	Construction Details	
	Records	
	Tests	
	Acceptance Criteria for Strength of Concrete	
	Procedure in the Event of Failure	
	Non-structural Prescribed Mix Concrete	20
	"No Fines" Concrete	20
	Breeze Concrete	21
	Finishes to In-situ Concrete	21
	Unformed Finishes	21
	Tolerances	22
	Supervision	22
	General	22
4.	BRICKWORK	23
	Sand	
	Cement	
	Lime	
	Water	_ ·
	Cement Mortar	
	Compo Mortar	
	Strength Mortar	
	Mixing of Mortar	
	Testing of Strength Mortar	24
	Burnt Clay Common Bricks	24

	Bricks for Foundations	24
	Drickwork	24
	Hollow Walls	25
	Diek Linings to Concrete	25
	Deinforced Drick Lintole	
	Dra cost Dra stronged Concrete Lintels	ZO
	Pagging Down Brickwork	
	Crombo	
	Tigg to Wall Plates Rafters etc	
	Wolded Mach Brick Reinforcement	20
	Bitumon Emulsion Waterproofing to Brickwork	ZO
	Facing Bricks, Paving Bricks, Quarry Tiles etc	26
	Faced Brickwork	26
	Paving Bricks and Quarry Tiles	26
	Fibre Cement Sills	- 26
	Rates	26
	Rates	
_	WATERPROOFING	27
5.	General	27
	Workmanship	 27
	Polyethylene Sheeting	27
	Mastic Asphalt Roofing	27
	Flexible Glass Fibre Reinforced Polyester Waterproofing	28
	Expansion Joint Sealants	
	Expansion Joint Sealants	28
	Rates	
^	ROOF COVERINGS	29
6.	Concrete Decling Tiles	29
	Chromodek roof sheeting	29
	Rates	29
	Corrugated Iron roofing, cladding and filling	30
	Fluted steel roofing, cladding and filling	30
	Rates for roofing, cladding and filling	31
	Rates for rooming, clauding and minig	
7	CARPENTRY AND JOINERY	31
7.	Nomanalatura of Timbers	31
	Storage of Timbers	32
	Orders	32
	Pre-treatment of Timbers	32
	Stress Grading of Softwood Timber	32
	Stress Grading of Softwood Timber	32
	Structural Timber Brandering and Battens	32
	Joinery and Shelving	32
	Joinery and Shelving	32
	Structural Laminated Timbers	32
	Finger-jointed Timbers	33
	Jointing of Purlins, Fascias, Rails, Beams etc	33
	Hard Woods	33
	Prefabricated Timber Roof Trusses	34
	Fabrication and storage	
	Erection and bracing	
	Potoc	O(
	Insulation, Waterproofing and Dust Proofing Material for Roots	JE
		Ji
	Cynoum Coyod Cornices	
	Fibra Coment Shoots	J,
	Fibra Coment Collidora Sheets	JC
	Veneers	35

	Plywood	36
	Chip Board	36
	Batten Boarding	36
	Decorative Laminate Linings	36
	Nails and Screws	36
	Plugs, etc	36
	Shot Fixing	36
	Carpentry	36
	Ceilings	36
	Flush Plastered Ceilings	36
	Trap Doors	37
	Suspended Ceilings Boards	37
		37
	Exposed Tee-System Suspended Ceilings	
	Concealed Tee-System Suspended Ceilings	
	Aluminium Trims to Ceilings	37
	Insulation Material for Cellings	37
	Doors	
	Framed, Ledged and Braced Batten Doors etc	38
	Entrances to Seclusion Wards	38
	Doors to X-Ray Units	38
	Joinery	38
	Partitions	39
	De-mountable Partitions	41
	Drywall Partitions	41
	·	
8.	FLOOR COVERINGS, PLASTIC LININGS, ETC	42
	Floor Sheeting	42
	Skirtings, Stair Nosings, Edging Strips etc	42
	Carpet Tiles and Sheeting	42
	Laying	43
	Floor Preparation	43
	Construction Joints	44
	Glazing	44
	Rates	
	TOROG	• •
9.	IRONMONGERY	45
10.	STRUCTURAL STEELWORK	46
	Generally	46
	Interpretations	
	Definitions	
	Sub-Contractors	
	Materials	
	Shop Details Drawings	
	Substitution of Sizes etc	
	Fixings	
	Fabrication, Assembly and Erection	47
	Inspection and Testing	47
	Priming of Structural Steelwork	
	Measurement and Payment	40
	Rates	49
11.	METALWORK	49
	Rates	49
	Welding and Brazing	
	Screw Fixings	
	Pipe Members	50
	Priming of Steelwork	50
	Galvanising of Steelwork	50



	Chromium Plating of Steelwork	50
	Pressed Steel Door Frames	50
	Stainless Steel Door Frames	51
	Pressed Steel Cunhoard Door Frames	51
	Steel Windows and Doors	· 5Z
	Stainless Steel	54
	Apodised Aluminium Welded Windows and Doors	 55
	Glazing to Dorrs / Aluminium Glazed Screens	57
	Strong Room Doors	ეგ
	Burglar Resisting Safes	58
	Adjustable Louver Gear Sets	58
1	Rates	58
12.	PLASTERING	58
	Mixing	58
	Materials	58
	Measurement of Constituent Parts of Floor Finishes, Toppings,	
	Screeds and Plaster Finishes	59
	Preparation of Surfaces	59
	Floor Screeds etc	59
	Granolithic Finish to Concrete Floors etc	59
13.	PLASTER	60
10.	General	60
	Cement Plaster	60
	Barium Plaster	60
	Curing Protection etc	60
	Rates	60
	Generally	61
14.	TILING	61
• • •	Materials	61
	Measurement of Constituent Parts of Backings, etc	61
	Preparation of Surfaces	O i
	Glazed Ceramic Wall Tiles and Fittings	62
	Mosaics	62
	Unglazed Ceramic Floor Tiles and Fittings	62
	Rates	02
	Transition Trims	62
	Movement Joints	62
15.	DRAINAGE AND PLUMBING	62
	Generally	62
	Subsoil Drains	DJ
	Storm water and Soil Drain Pipes	63
	Concrete Reds and Encasement to Drain Pipes	bd
	Pine Leving	63
	Gulley trans	ba
	Grazea Trans	63
	Podding Eyes	64
	Inspection Eve Blocks	64
	Surface Water Channels	64
	Cast Iron Gratings for Gullevs and Storm Water Drains and Cast Iron	
	Surface Boxes, Manhole Covers and Frames	64
	Storm Water Sumps, Junction Boxes, Manholes, Inspection	
	Chambers Cable Inspection Chambers and Valve Chambers	64
	Soil Drain Manholes and Inspection Chambers	DS
	Manhole Covers and Frame	D:
	Soak Pits	bt

	Septic Tanks	65
	Testing of Drains, Manholes and Inspection Chambers	66
	Defects to be Made Good	
	Sheet Metalwork Linings to Valleys	67
	Linings to Secret Gutters	
	Soakers	
	Under-Flashings	~ .
	Cover Flashings	
	Flashings Around Pipes through Roof Coverings	
	Rainwater Pipes	
	Generally	
	•	
	Eaves Gutters	
	Sanitary Plumbing and Fittings	
	Sanitary Fittings	
	Rates for Sanitary Ware	
	Below Ground Water Reticulation	
	Above Ground Water Supplies	71
	Water Taps and Valves	
	Concrete Thrust and Anchor Blocks	 72
	Testing of Water Mains	72
	Excavations for Pipe Trenches	72
	Backfilling	
	Sizes of Pipes	• -
	Rates for Pipes	
	Rates for Chases, Holes Etc	
	Fire Extinguishers	
	Fire Hose Reels	
	Fire Hydrants	
	· · · · · · · · · · · · · · · · · · ·	7-4
16.	GLAZING	74
	Materials	
	Glazing	
	Rates	
	rates	70
17.	PAINTING	75
17.		75 75
	Materials	
	Preparatory Work	
	Application of Paints, etc	
	Rates	77
18.	ROADWORK	77
10.	Sub-Grade	77
	Sub-Base	
		· -
	Stabilisation	
	Base Course	
	Chip and Spray Surfacing	
	Double Seal Coat with Black Top Surfacing	
	Slurry Seal Surfacing	
	Premix Tar macadam Surfacing	
	Pre-cast Concrete Paving Blocks	
	Kerbs	
40	FENCING AND CATEG	
19.	FENCING AND GATES	85
	Generally	
	Security Fencing	
	Gates	87

20.	SUBMISSIONS FOR PREFABRICATED TIMBER ROOF TRUSSES	90 90
	Letter Ref TR 2	90
	Letter Ref TR 2	
21.	SUPPLEMENTARY PREAMBLES	91
	Alterations	91
	Concrete, Form Work and Reinforcement	92
	Masonry	92
	Roof Coverings, etc	92
	Carpentry and Joinery	92
	Ceilings and Partitions	93 93
	Ironmongery	93
	Metalwork	94
	Plastering	95
	Tiling	
	Plumbing and DrainageGlazing	95
	Glazing	00
TABLES		
IMPLE		
Α	Removal of Formwork (Minimum Times in Days [24 hours])	12
В	Concrete Classes: Strength, Aggregate Size and Compaction	14
Ċ	Maximum Cement / Water Ratios for Different Conditions of Exposure	10
D	Slump Limits	15
Ε	Prescribed Mix Concrete for Non-Structural Purposes	20
F	Crusher Run Base Course: Stone Specifications	OU
G	Single coat Pre-mix Wearing Course: Specifications	83
Н	Carpentry and Joinery: SANS Specifications	93
NOTE:		

Only those clauses or portions of clauses in the following preambles, which refer to items in the Bills of Quantities, shall be considered as applying to the performance of this Contract.

1. ALTERATIONS

SITE VISIT: — Tenderers are advised to visit the site prior to tendering and satisfy themselves as to the nature and extent of the work to be done, also to examine the condition of all existing buildings as no claim will be entertained on the grounds of ignorance of the conditions under which the work was to be executed.

MATERIALS FROM THE ALTERATIONS: — unless otherwise stated, will become the property of the Contractor and all these materials, together with all rubbish and debris must be carried away and the site left clean and unencumbered.

Items described as "removed" shall mean removed from the site.

Credit for the value of materials from the alterations is to be allowed for on the Summary/Final Summary page.

Items described as to be re-used or to be handed over to the Administration are to be dismantled where necessary and stacked on site where directed, and the Contractor will be responsible for their removal and storage until required, and shall make good all items missing, damaged or broken at his own expense.

Unless otherwise described, no materials from the alterations shall be re-used in any new work without the written approval of the Department.

Prior to the removal of any timbers from the site, these are to be inspected by Government Entomologists. If any of these timbers are infested by wood destroying agencies, these timbers are to be disposed of in the manner prescribed by the Government Entomologist.

In taking down and removing existing work, particular care must be taken to avoid any structural or other damage to the remaining portions of the buildings.

ASBESTOS REGULATIONS 2001:

In terms of Asbestos Regulations 2001, no individual person, contractor or agent shall remove, demolish or strip any building containing asbestos or products containing asbestos (including asbestos roof sheeting, ceilings, guttering and down pipes) unless the work is performed by a "Registered Contractor", registered with the Department of Labour. All asbestos work shall be carried out under the supervision of an "Approved Inspection Authority".

It is a requirement that before any work involving asbestos removal is carried out, the following procedure and documentation is followed: -

- 1. Prior to the commencement of any demolition work, written notification shall be given to the Assistant Manager (Inspection and Enforcement), Durban Labour Centre, Masonic Grove, Durban, stating the name, address and details of the person(s) removing or stripping the asbestos. The notification shall include the date, time and place where the proposed work is to be carried out. (Regulation 3).
- The name and details of the Approved Inspection Authority that is to supervise and confirm that the work is being carried out according to the specific requirements of the Asbestos Regulations 2001 (as amended), including the approved "written work procedure" document. This document shall be submitted and signed at least 14 days prior to commencement of demolition work by the Approved Inspection Authority. (Regulation 21).
- 3. The production of valid accreditation certification of training for all employees involved in the asbestos removal work.



4. On completion of the asbestos related work a "Clearance Certificate" which includes the asbestos disposal certificate shall be forwarded to the Department by the Approved Inspection Authority.

In terms of the above regulations, it is an offence to carry out any asbestos work as defined in the above regulations without the necessary approval / requirements being met.

Individual persons or contractors found to contravene these regulations will be issued with a **PROHIBITION NOTICE** which in effect will stop all work on site and the offenders will then be liable for prosecution.

Any employer found guilty under the Asbestos Regulations 2001 may be liable to a fine and or imprisonment not exceeding 12 months.

NOTICE OF DISCONNECTIONS: — The Contractor is to give ample notice to the Department and Local Authorities regarding any disconnections necessary prior to the removal or interruption of electrical or telephone cables, water supply and sanitary services, etc.

DUST: — The Contractor is to allow in his rates for taking all precautions necessary to prevent any nuisance from dust whilst carrying out the works.

SHORING: — Rates for shoring are to include for the use and waste of all props, needles, wedges, braces, nails and screws, etc. required and for all cutting, notching, framing and fitting, maintaining in position for the required periods and removing at completion. All shoring is to be executed in a manner approved by the Department.

MATCHING EXISTING WORK: — The terms "make good" or "making good" to existing work as described in the items shall mean making good with materials to match, all joined to existing.

FORMING NEW OPENINGS, ETC. IN EXISTING WALLS: — Rates for items of forming new or altering existing openings are, unless otherwise stated, to include for the following: -

- a) Breaking out for and inserting adequate lintels over the new openings (except where stated in the items as being below an existing beam, slab or lintel), to the approval of the Department. The lintels are to be of in-situ concrete Class C, or of pre-cast pre-stressed concrete or of brickwork in 1:3 cement mortar, with a minimum bearing of 230mm at each end and suitably reinforced, and rates are to include for all necessary formwork, turning pieces, etc. and for wedging and pinning up to existing brickwork over in 1:3 cement mortar.
- b) All shoring and propping required.
- c) Facing up jambs in new brickwork in cement mortar properly bonded to existing,
- d) Building up the portions of the openings stated in the items in new brickwork in cement mortar properly bonded to existing.
- e) Formwork for concrete sills and thresholds where required.
- f) Making good only to the finishes as stated in the items. (Note: The making good of paint finishes has been measured separately).
- g) Forming rounded angles, throats on external plastered soffits, mitres, etc. where required in all new plaster, render and granolithic finishes.

The supply, building in, fixing, etc. of all windows, doors, frames, etc. to the newly formed openings and the removal of all existing windows, doors, frames, etc. from openings to be altered, have been elsewhere measured.

2. EARTHWORKS

SITE CLEARANCE: —The item given in the Bills of Quantities for site clearance shall be deemed to include the removal from the site, or burning if permitted by the Local Authority, of shrubs and trees with trunks under 200mm girth measured at 1m above ground level,



hedges, bushes, other vegetation, rubbish and debris. Holes left by roots are to be backfilled with earth and rammed.

EXCAVATIONS: — Rates for excavations are to include for forming and trimming to the correct levels, falls, slopes, curves, etc. for trimming sides, stepping, levelling and ramming bottoms, staging and disposing of the excavated material as described in the items. Rates for excavations to reduce levels over site are also to include for forming and trimming banks to the required batter. The Contractor is to allow in his rates for the bulking of excavated material.

The term "excavate", unless otherwise stated, shall mean excavate in "soft excavation" as defined below and for the purpose of classifying excavations the following will apply: —

- a) Soft excavation: shall be excavation in material that can be efficiently removed by a back-acting excavator of flywheel power approximately 0, 10 kW per millimetre of tined-bucket width without the assistance of pneumatic tools such as paving breakers, or that can be efficiently loaded without prior ripping or stockpiling by a rubber tired front-end loader of approximately 15t mass and a flywheel power of approximately 100 kW.
- b) Intermediate excavation: shall be excavation in material that requires a backacting excavator of flywheel power exceeding 0,10kW per millimetre of tined-bucket width and the assistance of pneumatic tools prior to removal by equipment equivalent to that specified in (a) above.
- c) Hard rock excavation: shall be excavation in material that cannot be efficiently removed without blasting or without wedging and splitting prior to removal.
- d) Class A Boulder excavation: shall be excavation in material containing more than 40% by volume of boulders of size between 0.03m³ and 20m³ in a matrix of softer material or smaller boulders.
 - **Note:** Excavation of solid boulders or lumps of size exceeding 20m³ will be classed as hard rock excavation. (2) Excavation of fissured or fractured rock will not be classed as boulder excavation but as hard rock or intermediate excavation according to the nature of the material.
- e) Class B Boulder excavation: shall be excavation of boulders only in a material containing 40% or less by volume of boulders of size between 0.03m³ and 20m³ in a matrix of softer material or smaller boulders.
 - **Note:** Those boulders requiring individual drilling and blasting in order to be loaded by a back-acting excavator as specified in (a) above, or by a track type frontend loader, will each be separately measured as Class B boulder excavation.
 - The excavation of the rest of the material will be classed as soft or intermediate excavation according to the nature of the material.

Method of Classifying: —The Contractor may use any method he chooses to excavate any class of material but his chosen method of excavation shall not determine the classification of the excavation. The Department will decide on the classification of the materials. The classification will be based on inspection of the material to be excavated and the criteria given in (a) to (e) above, as applicable. The decision of the Department shall be, subject to the relevant provisions of the contract, final and binding.

Should the Contractor consider that the excavation is other than "soft excavation" he must notify the Department immediately in order that an inspection be made and a decision arrived at by the Department as to the category of such excavation. Should the Contractor fail to give such notification, the excavation shall be deemed to be "soft excavation" and shall be measured and valued accordingly.

Blasting will only be permitted with the written authority of the Department, if and when permission is granted, it is to be executed only by persons holding the necessary Government Blasting Certificate and subject to all regulations imposed by the Department and/or Local Authority. In addition, the Contractor is to indemnify the Provincial Administration against all claims in respect of damage to persons and property resulting from such blasting operations.



Before commencing any excavations, the Contractor must satisfy himself as to the accuracy of any levels indicated on the drawings, as no claim will be entertained at a later date for any alleged inaccuracy in such levels.

Excavation shall be carried down to such depths as are necessary to obtain firm foundations, but before proceeding to greater depths than are shown on the drawings, the Department's approval must be obtained.

The Contractor will be responsible if he excavates wider or deeper than shown or required. If the excavations are deeper than shown or required such extra excavations are to be filled in with mass concrete at the Contractor's expense. If the excavations are wider than shown or required, any form-wait or mass concrete filling required to the side of the concrete foundations is to be executed at the Contractor's expense and to the approval of the Department.

Depths of excavations as approved shall be checked and recorded by the a Departmental Official and the Contractor's Foreman before any concrete is laid or the excavations are otherwise covered or filled in.

Notwithstanding such approval, any excavations which become waterlogged or otherwise spoilt after approval, shall be cleaned out and reformed, at the Contractor's expense and to the satisfaction of the Department, before any concrete, etc. is laid.

WATER: — The Contractor shall keep all excavations free from water or mud by pumping, baling or otherwise.

WORKING SPACE: — The Contractor is to allow against the items of "excavate to provide working space" for excavating beyond the extent of the net excavations measured to provide the necessary working space for the carrying out of such work as is described in the items. Rates are to include, in addition to the extra excavation, for any additional risk of collapse so incurred and for filling back and compacting the excavated material.

No separate item for working space is provided or will be considered where the face of the measured excavation is 750mm or more away from the finished face of the structure. Separate items for working space for the building of brick foundation walls on ordinary concrete wall footings will not be considered.

In the case of column base and pile cap excavations, where the dimensions between the column face and the excavation face is less than 500mm, working space has been measured for the width of the column face from the commencing level of excavation to the top of the column base or pile cap only where the top of the column base or pile cap exceeds 1.5m below the commencing level of excavation.

RISK OF COLLAPSE: — The Contractor shall maintain all excavated faces affecting the safety of the works and workmen. He must either provide all necessary temporary planking, strutting or shoring to all vertical excavated faces or carry the risk of collapse of these faces with all its implications. He must assume full responsibility in this connection and must allow in his rates accordingly. In addition, all excavated faces exceeding 1.5m deep are to be maintained in accordance with Government Regulations.

Quantities reflect the total superficial areas of the vertical excavated faces and will be subject to variation only in so far as these areas may vary, notwithstanding whether any temporary supports are used or not.

FILLING, **ETC**.: — All backfilling and filling under floors and paving must be of selected material from the excavations, unless otherwise stated, returned and compacted in layers as later described and with the top surface dressed to the correct levels and grades, all to the approval of the Department. Under no circumstances will the Contractor be allowed to use clay, peat or other unsuitable material for filling.



Rates for all items of filling with material from the excavations are to include haulage not exceeding 100m from the perimeter of the excavations.

Any filling supplied by the Contractor is to be of suitable material approved by the Department.

COMPACTION OF FILLING ETC.: — All filling and backfilling is to be done in layers not exceeding 200mm thick before compaction, with the layers level to ensure uniform compaction. Each layer is to be thoroughly compacted over the whole of the area to a dry density not less than 90% of Mod. A.A.S.H.O. density. The surface of each compacted layer shall be uniform and tightly bonded. Care is to be taken that no damage is done to foundation walls, drains and other services.

The densities of compaction referred to are to be determined by tests carried out in accordance with A.S.T.M. Designation D 1557-58 and at an optimum moisture content of not more or less than 5% of the required Mod. A.A.S.H.O. The Contractor shall be responsible for having sufficient tests taken of the density of the compacted filling to ensure that the required compaction is being attained to the satisfaction of the Department. These tests are to be undertaken by an independent testing authority nominated by the Contractor to the approval of the Department. The costs of all tests in this connection shall be borne by the Contractor and shall be allowed for in his rates.

PROTECTION AGAINST SUBTERRANEAN WOOD-DESTROYING TERMITES: — Where protection against termites is to be provided: —

- a) Remove vegetable matter

 All dead roots and other vegetable matter likely to encourage termites must be removed from the ground under, against the building and from all filling material.
- Treating the ground
 The ground under surface beds, and below suspended wood floors, must be treated by the application of Soil Insecticides of Chlordane or Aldrin types complying with SANS Specifications 1165 and 1164 respectively, mixed with water and applied at the rate of not less than 5 litres of solution per square metre uniformly over the whole surface. The concentration of the solution must be strictly in accordance with the manufacturer's instructions and to the approval of the Department.

The Department reserves the right to take samples of the diluted solution, at any time, in order to test the concentration of the chemicals used.

Where the ground to be treated is of earth filling, the upper 50mm layer of filling must be levelled by raking, but must not be rammed until after the solution has been applied, and where of natural ground, it must be loosened to a depth of not less than 50mm and similarly levelled, in order to enable the solution to penetrate into the soil. After the solution has been applied and allowed to penetrate the surface, the soil must be well rammed and consolidated.

Before applying the solution to the ground under the floors, splay back earth for a depth and width of 75mm from the internal faces of walls enclosing the floors, against internal walls, sleeper piers, etc. and thoroughly saturate with the solution. After the solution has soaked into the earth, the splayed grooves must be filled with earth and consolidated.

The treated layer of soil under suspended wood floors must be protected with a 75mm thick layer of approved clean gravel, finished to an even surface.

The treated layer of soil under concrete surface beds must be protected with a 25mm thick layer of well-consolidated approved grit prior to laying the waterproofing membrane.

Great care must be taken when laying concrete surface beds, protective layers, etc. in order to avoid rupturing the treated layer of soil. Should the treated layer be ruptured at any



point it must be made good and the area affected re-treated with the soil insecticide.

Contractors are advised that:

- Special precautions must be taken to protect the workmen whilst using the soil insecticide.
- The treatment of filling or ground under floors shall be done as soon as practicable, b. so that treatment may dry out before the floors are laid.
- The treatment of the ground must be carried out under the supervision of the C. Department.
- The soil insecticide to be delivered to the site in sealed drums clearly labelled or d. stamped with the name of the product.
- In addition to the foregoing the application of the soil insecticide to be carried out in e. accordance with SANS Code of Practice 0124 — the application of Certain Soil Insecticides for the Protection of Buildings.
- The protective layers of gravel or grit have been measured separately. f.

RE-USE OF EXCAVATED MATERIAL: — Material of any kind that may be discovered on the site during the excavation shall remain the property of the Administration. Such material may, if approved, be used for aggregate. Material so used shall be valued and the value deducted from the Contract Sum.

DEMOLITIONS: — The Contractor is referred to the preambles for "Alterations" insofar as they apply and the following: --

The demolition of existing buildings is to be done in a practical and safe manner, under the continuous supervision of a competent Foreman. Rates for the demolition of existing buildings are to include for breaking up and removing all external screen walls, steps and ramps, surface water channels, rainwater sumps, gulleys, etc. and grubbing up and removing all foundation walls and footings, disconnecting and removing all services to a point not less than 1m beyond the perimeter of the buildings, plugging off ends of all remaining pipes, and for filling in all holes with clean earth and ramming up to ground level. All movable fittings and furniture, fire extinguishers and electrical and other equipment in the buildings to be demolished are to remain the property of and will be removed by the Administration prior to the commencement of the demolition.

Before commencing the demolitions, the Contractor shall comply with any Local Authority regulations in force in respect of rodent extermination, etc. and he shall obtain the required Clearance Certificate. Items to cover the cost of obtaining the certificate and the fumigation, etc. of the buildings to be demolished have been provided elsewhere in the Bills of Quantities, and the fumigation is to be carried out by a firm specialising in this type of work. The fumigation of the buildings to be demolished shall only be carried out if called for by the Local Authorities and if not required the value of the relevant items in the Bills of Quantities will be deducted from the Contract Sum.

After handing over the site to the Contractor, the risk of any loss or damage to the buildings to be demolished and the materials therein, caused by theft, vandalism, etc. shall be the responsibility of the Contractor and he shall take such precautions as he deems necessary against such loss or damage.

GRASS PLANTING AND TURFING: — Is to be "Cape Kweek" or "Umgeni" grass scientifically known as Cynodon dactylon or other local fine grass approved by the Department. In areas where fine grass does not grow readily, Kikuyu grass Pennisetum clandestinum may be substituted. The areas must be identified and the approval of the Department obtained before Kikuyu grass is to be planted.

Grass Planting To Level Areas: — The areas to receive grass are to be weeded and raked free of stones and other superfluous matter and all depressions left by the earthworks plant are to be filled in with approved topsoil. The planting of grass is to be carried out in continuous root planting in rows 200mm apart. The method of planting called "sprigging" may be used as an alternative.



Immediately after completion of each strip or square, the area thus grassed is to be thoroughly watered and lightly rolled. Any drifting or piling up of the top soil due to wind or any other cause must be prevented as far as possible and should such piling up of soil against newly planted grass occur the soil must immediately be raked level and lightly rolled.

Turfing: — Banks are to be carefully trimmed to an even surface and weeded and raked free of stones, etc. and all depressions filled in with approved topsoil as before described. Turfing of banks is to be carried out with 25mm thick maximum 500mm x 1000mm weed-free grass sods, of grass as before described, and as approved by the Department. The grass sods are to be set in position in horizontal rows to broken bond and closely fitted together and tamped flat with a timber pummel, a maximum of two sods in every square metre of area covered being staked to the bank to maintain position, with and including one sharpened wood or bamboo skewer 250mm long and with all cavities between sods filled in with approved top soil and the whole area lightly top soil dressed on completion.

Established Lawn: — The use of established lawn in pieces size approximately 500mm x 1000mm x 25mm thick in lieu of grass sods on banks will be permitted provided that the established lawn is supplied and laid by a firm experienced in this type of work and to the approval of the Department. The fitting, tamping, staking and top dressing must all be as described for turfing, except that one piece per square metre is required to be staked as described.

Fertilizer: — An approved fertilizer of the following types— Type 2:3:2 for grass planted levelled areas and Type 3:2:1 for turfed or established lawn covered banks is to be supplied and applied by the Contractor at the rate of 400 kg per hectare. In the case of grass planted levelled areas the fertilizer is to be applied either before or after grass planting and in the case of turfed or established lawn covered banks the fertilizer is to be applied after the sods or pieces have been laid.

The fertilizer above described is to in addition to any fertilizer which may have been specified to be applied during either the operation of scarifying and grading the area to be grassed or the re-spreading of top soil.

A sample of the existing topsoil or the topsoil to be re-spread is to be sent to an approved fertilizer manufacturer for testing and advice on the acid or alkaline content of the soil. The cost of this test is to be borne by the Contractor if this is not provided free by the fertilizer manufacturer.

The requisite quantities of limestone ammonium nitrate for acidic soil or ammonium sulphate for alkaline soil as determined by the soil test will be supplied to the Contractor by the Department and the cost thereof is to be included in a Provisional Sum elsewhere in the Bills of Quantities. The application of this treatment is to be undertaken by the Contractor and his rates for grassing, etc. must include for same.

Weed killer: — "Weed Master or Turf Master" or other approved weed killer is to be applied to the entire grassed or turfed areas at a rate of 4 litres mixed with 200 litres of water per hectare, this being equivalent to 40-45 millilitres mixed with 5 litres of water per fifty square metres. The solution is to be sprayed on with a suitable spraying apparatus to achieve an even distribution. Six to eight weeks later, the operation is to be repeated. The application of weed killer is not to take place during wet weather. Weather conditions should be such as to allow a minimum of two hours or absorption before the likelihood of rain.

Watering and Rolling: — The entire turfed area is to be kept clear of weeds, lightly rolled and thoroughly watered throughout the period of the Contract and or at least three months from the time of acceptance of the grounds or until the grassing or turfing is well established if that is sooner, all to the satisfaction of the Department.

In the absence of rain, the initial watering of grassed or turfed areas is to be carried out as follows: —

Grass planted levelled areas: - at least twice a week.

Established lawn areas: - at least once a week.

Turfed areas: - at least once a day for the first ten to fourteen days, thereafter at least once a week.

The Contractor must allow in his rates for providing and removing at completion all necessary temporary water piping complete with fittings, sprinklers, hoses, etc. as required for the proper watering of the grassed or turfed areas of the plateaux and banks.

Cutting of Grass: — The Contractor must commence mowing as soon as possible once turfed areas have become established and undertake regular mowing at approximately one-week intervals up to the date of final delivery, except that, during the maintenance period, the mowing of the plateaux will be undertaken by the Institution.

Note: — All stages of grass planting and turfing are to be supervised on a full time basis by a competent person with the necessary experience and knowledge.

It shall be the responsibility of the Contractor to advise the Department when the following operations are to be carried out in order that his representative may be present: —

- the application of fertilizer a)
- the application of weed killer. b)

Should the Contractor fail to do so, the Department shall have the right to instruct the Contractor to repeat the operation at his own expense.

CONCRETE, FORMWORK AND REINFORCEMENT 3.

GENERAL: — This specification applies to concrete work formed into its final shape and position in-situ.

All concrete and formwork shall be carried out in accordance with SANS Specification 1200 G — Concrete (Structural) (a copy of which the Contractor will be required to keep on the site so that it can be referred to at all times during the Contract), with the following amplifications and amendments: —

INTERPRETATIONS: — Clauses 2.1 and 2.2 of SANS Specification 1200G refer. This preamble, together with any other supplementary preambles appearing in these Bills of Quantities shall be deemed to be the project specification and are the "Portion 2" referred to in Clause 2.2.

DEFINITIONS: - Clause 2.3 of SANS Specification 1200 G refers. All references to the Engineer shall be deemed to mean the Department.

MATERIALS

Cement: -unless otherwise specified, shall be one or more of the following and shall, in each case, comply with the requirements of the relevant standard specification: —

Portland cement and rapid-hardening cement to SANS 471 Specification

Portland blast-furnace cement to SANS Specification 626.

Portland cement 15 to SANS Specification 831.

Nevertheless, no cement other than ordinary Portland cement shall be used without the approval of the Department. Cement containing more than 15% blast-furnace slag will not be permitted in columns or in members less than 50mm thick.

In addition (for the abovementioned items) where Ordinary Portland cement is used, blastfurnace slag (from separate containers) must not be added in any proportion whatsoever.

No mixing of two different types of cement in the same batch will be allowed, and unless otherwise approved by the Department, the same brand and type shall be used in all exposed concrete.



Lumpy cement, broken sacks and sweepings shall not be used.

Cement supplied in sacks shall be used in the order in which it was delivered and shall not be kept in storage for longer than six (6) weeks without the approval of the Department.

Water: — Shall be clean and free from injurious amounts of acids, alkalis, sugar, organic matter and other substances that could impair the strength or durability of the concrete. If so required by the Department, the suitability of the water shall be proved by tests carried out by an approved laboratory.

Aggregates: — Unless otherwise specified both the coarse aggregate (stone) and the fine aggregate (sand) shall comply with the requirements of SANS Specification 1083. The Contractor is to prove compliance by means of either a certificate from the supplier or by grading analysis tests.

Admixtures: — i.e. materials other than cement, aggregate and water shall not be used in the concrete mix without the approval of the Department. The onus for proof of satisfaction to the Department for any admixture proposed shall be with Contractor.

Reinforcement: — for concrete shall be as specified and shall, in each case, comply with one of the following: —

- a) Type A hot rolled mild steel bars of plain round cross section to SANS Specification 920
- b) Type C Class 2 hot rolled high yield stress Grade 1 deformed bars to SANS Specification 920
- c) Type D Grade 1 cold worked deformed bars to SANS Specification 920.
- d) Welded steel fabric to SANS Specification 1024 manufactured from plain hard-drawn mild steel wire.

A sample reinforcing rod, approximately 600mm long, may be taken from each consignment of rods of similar diameter, for testing. If any sample is found unsatisfactory the whole consignment of rods from which the sample was taken will be rejected.

No substitution of the bars specified shall be made without the prior approval of the Department.

REINFORCEMENT

Bending: — Reinforcing bars shall be cut and bent according to the dimensions shown on the working drawings and in accordance with SANS Specification 82.

Except as allowed for below, all bars shall be bent cold and bending shall be done slowly, a steady even pressure being used without jerk or impact.

If approved by the Department, hot bending of bars of diameter at least 32mm shall be permitted, provided that the bars do not depend for their strength on cold working. When hot bending is approved, the bars shall be heated slowly to a cherry red heat (not above 840 °C) and after bending shall be allowed to cool slowly in air. Quenching with water shall not be permitted.

Fixing: — All steel reinforcement, at the time of placing of the concrete, must be free from loose rust, scale, oil and other agents which will reduce the bond between the steel and the concrete or initiate corrosion of the reinforcement. Reinforcement exposed to sea spray shall be washed down, and the formwork drained, just prior to concreting.

Reinforcement shall be positioned as shown on the working drawings or as directed by the Department and maintained in those positions within the tolerances given in the Specification for Tolerances. It shall be secured against displacement by tying at intersections with 1.6 or 1.25mm diameter annealed wire or by the use of suitable clips or, if permitted by the Department, by welding in accordance with SANS 1856. Welding will not



be permitted on cold worked bars. Reinforcement shall be supported in its correct position by hangers, saddles or cover blocks and aligned by chairs and spacers all of approved design and material. Where such hangers, saddles, chairs or spacers are of steel, they will be detailed on the drawings or in bending schedules.

Cover: —The minimum cover of concrete over reinforcement, excluding any applied finish, shall be as shown on the working drawings, or as directed by the Department.

Cover shall be maintained by using cover blocks, which shall be made of small aggregate concrete, not mortar, using the same cement and aggregate type and ratio as the parent concrete. Alternatively, cover blocks may be of the plastic type provided that sufficient number are used to prevent their collapse, that they are of a colour compatible with that of concrete and that the prior approval of the Department is given. Metal cover blocks shall not be used.

If the concrete face has a Class F2 smooth finish or some other special finish as is described elsewhere, hemispherical or pyramid shaped concrete cover blocks shall be used unless otherwise specifically approved by the Department.

Splicing: — or joining of reinforcing bars shall be made only as and where shown on the working drawings or as otherwise approved. The length of the overlap in a splice shall be not less than that shown on the working drawings or forty-five times the diameter of the bar if not shown.

Protection of Exposed Bars: — If left exposed for future bonding of extensions to the works, reinforcement shall be protected from corrosion as specified by the Department.

Electric Current: — Reinforcement shall not be used as a means for conducting electric current unless there is conformity with the requirements of SANS Code of Practice 03.

Inspection of Reinforcement: — Reinforcement shall be subject to inspection by the Department after the Contractor is satisfied that it has been completely and correctly fixed. The amount of notice given by the Contractor to the Department before concreting commences that reinforcement is ready for his inspection shall be agreed between the Department and the Contractor at the commencement of the Contract.

FORM WORK

Design: — Formwork shall be so designed and constructed by the Contractor that the concrete can be properly placed and compacted and that the required shapes, finishes, positions, levels and dimensions shown on the working drawings are maintained, subject to the tolerances given in the Specification for Tolerances. Unless otherwise directed by the Department, all formwork to beams and slabs shall be evenly cambered, unless otherwise specified or shown on the drawings, to the mid-point of the span of the member at the rate of 2mm per metre of span, all to the approval of the Department and the full cross section of the member shall be maintained after placing of concrete.

The formwork and joints shall be capable of resisting the dead load and pressure of the wet concrete, effect of vibration equipment, wind forces and all other superimposed loads and forces it is necessary for it to carry.

Should it be necessary to support formwork off suspended or ground bearing slabs, the manner of execution of the support shall be agreed with the Department so that overstress of, or damage to, those members is prevented.

In structures having, in whole or part, two or more reinforced concrete floors, props to the approval of the Department shall be provided under the soffits of beams and slabs of any floor which is being used to support the formwork and new concrete of the floor above. These props shall not be removed until the formwork for the new concrete has been struck.

Wedges and clamps shall be used in preference to nails. Joints in forms shall be tight enough to prevent leakage of cement paste.



Finish: — The quality of the finished surface of the concrete shall be as shown on the working drawings or as otherwise specified, and the type of formwork used shall be adequate to provide such finishes.

Ties: — The type of ties used and their position shall be such that the finish required in terms of the clause "Finish" is achieved. Tie rods are preferable to wire ties and the forms shall not be secured to the reinforcement. No corrodible tie rod or wire tie shall be allowed within the depth of concrete cover, and in the case of water-retaining or tanked structures, no removable tie rod or wire shall pass right through the concrete member.

Preparation of Formwork: — Surfaces that are to be in contact with fresh (wet) concrete shall be so treated by coating with a non-staining mineral oil or other approved material, or, in the case of timber forms, by thoroughly wetting surfaces so as to ensure easy release and non-adhesion to formwork during stripping. If any substance other than water is used, every precaution shall be taken to avoid contamination of the reinforcement.

Re-use of Formwork: — Before re-use, all formwork shall be reconditioned, and all form surfaces that are to be in contact with the concrete shall be thoroughly cleaned without unduly damaging the surfaces of the formwork.

Openings: — Where necessary for the proper placing of the concrete, temporary openings for cleaning, inspection or placing purposes shall be provided, taking cognisance of the finishes specified.

Removal of Formwork: — Formwork shall not be removed before the concrete has attained sufficient strength to support its own mass and any loads that may be imposed on it. Except where the Contractor can prove by means of cube tests, at his own expense to the satisfaction of the Department that, because of its strength development characteristics the concrete has attained sufficient strength and that shorter periods are practicable, formwork shall not be removed within shorter periods than those given in Table A. The number of cube tests required shall be equal to the number required for testing at 28 days. Where full design loads are carried, no soffit forms and props may be removed until the full design strength is attained.

In structures having, in whole or part, two or more reinforced concrete floors, props to the approval of the Department shall be provided under the soffits of beams and slabs of any floor which is being used to support the formwork and concrete of the new floor above. These props shall not be removed until the formwork for the new concrete has been struck.

All formwork props shall have been removed from under beams and slabs before the commencement of construction of brickwork thereon, unless otherwise agreed with the Department. Formwork shall be removed carefully so that shock and damage to the concrete are avoided.



TABLE A—REMOVAL OF FORMWORK (MINIMUM TIMES IN DAYS (24 hrs))

	1	2	3	4	5	6	7	8	9	10
Type of structural Type of cement used member or formwork										
		cer Po	ortland nent a ortland ment '	nd d	har Po ceme ra har Po	apid- denin ortland ent* a apid- denin ortland nent '	d and ag		and b	
					W	eathe	r			i
		Hot or nor mal	Co ol	Col d	Hot or nor mal	Co ol	Col d	Hot or nor mal	Co ol	Cold
(a)	Beam sides, walls, and unloaded columns.	0,75	+	1,5	0,5	+	1	2	+	4
(b) prop ur	nderneath	4	+	7	2	+	4	6	+	10
(c)	Beam soffits with props left underneath, and of a ribbed floor construction	7	+	12	3	+-	5	10	+	17
(d)	Slab props including cantilevers	10	+	17	5	+	9	10	+	17
(e)	Beam props including cantilevers	14	+	21	7	+	12	14	+	21

^{*} Shorter periods may be used for sections of thickness 300mm or more.

CONCRETE QUALITY

General: — Concrete shall comply with the requirements for "Strength Concrete" as specified. The type of aggregate and cement, and their sources of supply, shall not be altered during the currency of the Contract without the prior written agreement of or instruction from the Department.

Strength Concrete: — The Contractor shall be responsible for the design of the concrete mix and for the proportions of its constituent materials, measured as described, necessary to produce concrete that complies with the requirements specified by the Department thus:-

- a) For each section of the work, the class of concrete and position on the Works, as shown on the drawings:
- b) For each class of concrete:
 - i) the minimum compressive strength at 28 days as shown in Table B
 - ii) the maximum nominal size of coarse aggregate as shown in Table B



⁺ In cool weather, stripping times shall be determined by interpolation between the periods specified for normal and cold weather.

- iii) the stump as shown in Table D
- iv) the maximum cement/water ratios as shown in Table C.

At the earliest possible stage in the Contract, at least 35 (thirty-five) days before the first concrete is placed, or as otherwise agreed with the Department, the Contractor shall submit samples of the aggregates which he proposes to use on the works to the Department.

The Contractor, under the supervision of the Department, shall prepare trial mixes using these same aggregates, to establish his ability to achieve the strengths specified, and satisfactory workability of the concrete. The Contractor shall provide all necessary equipment for, and carry out tests of moisture content of aggregates at the time of preparation of the trial mixes, tests of the slump of the mixes and at the same time cast not less than six standard cubes from each mix for compression tests.

The target strengths to be achieved under trial mix procedure shall exceed the specified minimum compressive strengths by a factor which is acceptable to the Department.

The Contractor shall also, when required to do so, prove the concrete yield obtained per sack of cement by suitable measurement of batches after placing.

No structural concrete work shall be poured until trial mix procedure has been properly followed and satisfactory 7 (seven) day compression strengths achieved. (Equivalent 28 (twenty-eight) day strength = $4/3 \times 7$ day strength + 5 MPA).

Thereafter, the materials, preparation of and method of manufacture of subsequent concrete shall conform accurately to those used in the trial mixes. If materials vary in the course of the Contract from the samples first submitted, the Contractor shall, on the instructions of the Department, repeat the trial mix procedure and vary the proportions to attain the specified qualities.

The costs of preparation of trial mixes, with tests associated with them, shall be borne by the Contractor and must be allowed for in the pricing of the concrete.

A valid concrete test result shall be the average obtained from the testing of three test cubes of concrete in accordance with SANS Method 863.



TABLE B—CONCRETE CLASSES: STRENGTH, AGGREGATE SIZE AND COMPACTION

	Minimum 28	Maximum nominal size of	Method of
Class	day cube compressive strength (MPA)	coarse aggregate (mm)	Compaction
50/26 50/19	50	26,5 19,0	
45/26 45/19	45	26,5 19,0	
40/26 40/19	40	26.5 19,0	
35/26 35/19	35	26,5 19,0	Mechanical
30/37 30/26 30/19 30/13	30	375 26,5 19,0 13,2	(see clause "Compaction")
25/37 25/26 25/19 25/13	25	37,5 26,5 19,0 13.2	
20/37 20/26 20/19 20/13	20	37,5 26,5 19,0 13,2	
15/37 15/26 15/19	15	37,5 26,5 19,0	Non- mechanical
10/37 10/26 10/19	10	37,5 26,5 19,0	(See clause "Compaction")

The Contractor shall be deemed to have satisfied himself, before tendering, of his ability to produce concrete of the required quality with available materials conforming to the specification, and mixed in the proportions on which his tendered rates are based. Any subsequent alterations of the mix proportions to meet these requirements shall be at the Contractors expense.

If, in the opinion of the Department, the concrete proportions are likely to lead to excessive segregation, honeycombing, bleeding or shrinkage cracking, he shall have the right to order the Contractor to amend the proportions at the Contractors own cost.

TABLE C — MAXIMUM CEMENT / WATER RATIOS FOR DIFFERENT CONDITIONS OF EXPOSURE

1-	2	3	4	-5				
		Exposure Conditions						
Type of structure	_Mild	Moderate	Severe	Very Severe				
Thin sections; reinforced piles; all sections with less than 25mm cover reinforcement.	*	0.53	0.48	0.40				
Moderate sections; retaining walls, piers, beams	*	*	0.53	0.43				
Exterior portions of mass concrete	*	*	0.53	0.43				
Concrete slabs laid on ground	*	0.53	0.48	*				
Concrete protected from the weather, inside buildings, or in ground below frost level	*	*		*				

^{*} In these cases the ratio will be based on the strength for the workability desired.

Consistency and Workability: — Slump measurements taken in accordance with SANS Method 862 shall be within the limits given in Table D appropriate to the type of construction, or within such other limits as are laid down by the Department.

The concrete shall be of such workability that it can readily be compacted into the corners of the formwork and around reinforcement without segregation of the materials or excessive "bleeding" of free water at the surface.

TABLE D—SLUMP LIMITS

1	2	3	4	5
Type of construction		Slum	ıp, mm	
	Non-mechanical compaction			
	Max.	mm.	Max.	mm.
Paving and pre-cast units	75	50	50	30
Heavy mass construction	75	25	50	20
Reinforcing foundation walls and footings	125	50	80	30
Slabs, beams, columns, and reinforced walls	125	50	80	30
Slabs and industrial floors on ground	125	75	80	50
Plain footings, caissons, and substructure walls	100	25	60	20

Ready-mixed Concrete: — This may be used subject to the approval of the Department. This approval may be withdrawn on 24 (twenty-four) hours notice to the Contractor if at any time if documents do not conform to the requirements of this Specification. Ready-mixed concrete shall also comply with the requirements of SANS Specification 878. Details of the

mix ingredients and tests thereon, the mix designs and relevant tests shall be forwarded to the Department for his approval. Ready-mixed concrete shall be cast within 3 (three) hours of placing all the ingredients in the mixing plant. Ready-mixed concrete shall be subject to the same sampling and testing at the site as that mixed on site and only the results of these tests will be regarded as valid.

TRANSPORTATION AND PLACING

Transportation: — Unless agreed with the Department, concrete shall not be pumped into its final position.

The Contractor must provide suitable runways for the distribution of concrete to the various parts of the structure and these must be solidly constructed in such a manner so as to obviate the possibility of interference with the steel reinforcement.

Placing: — Unless otherwise agreed with the Department, the Contractor shall give the Department at least 24 (twenty-four) hours notice of his intention to place concrete. No concrete shall be placed without the prior approval of the Department and without a representative of the Department being present. Concrete shall be placed within one hour of the time of its discharge from the mixer. Concrete shall not be re-tempered by the addition of water or other material. The forms to be filled shall be clean internally. All excavations and other surfaces of an absorbent nature that are to come into contact with the concrete shall be dampened with water. There shall be no free-water on the surface against which concrete is to be placed. Wherever possible, the concrete shall be deposited directly into its final position to avoid segregation and displacement of reinforcement and other items that are to be embedded. Deposited concrete shall not be so worked (whether by means of vibrators or otherwise) as to cause it to flow laterally in such a way that segregation occurs. Where possible, the concrete shall be brought up in horizontal layers of compacted thickness not exceeding 450mm and heaping shall be avoided.

Where a chute is used to convey the concrete, its slope shall be such as will not cause segregation, and a suitable spout or baffles shall be provided for the discharge of the concrete. Concrete shall not be allowed to fall freely through a height of more than 3 m, unless otherwise approved. Concrete shall not be placed during periods of heavy or prolonged rainfall.

Compaction: — The concrete shall be fully compacted by approved means during and immediately after placing. It shall be thoroughly worked against the formwork and around reinforcement and other embedded fittings without displacing them.

The concrete shall be free of honeycombing and planes of weakness. Successive layers of the same lift shall be thoroughly worked together.

The method of compaction shall be as specified. Mechanical compaction shall be undertaken by means of high frequency immersion vibrators of minimum frequency of 6000 vibrations per minute and a maximum acceleration of 4 g when under load, being capable of visibly affecting concrete over a radius of at least 500mm. Vibrators shall be inserted at about 500mm centres and withdrawn slowly to close the hole formed by the vibrator.

Non-mechanical compaction shall be undertaken by means of spading, rodding or forking.

Over-compaction resulting in segregation, surface laitance or leakage (or any combination of these) shall not be allowed.

Vibrators shall not be allowed to come within 30mm of the face of the formwork in the case of formed finishes, nor within 75mm of the face of the formwork in the case of special finishes.

Construction Joints: — Concreting shall be carried out continuously up to the construction joints shown on the working drawings or as prior approved by the Department, except that



if, because of an emergency (such as a breakdown of the mixing plant or the occurrence of unsuitable weather), concreting has to be interrupted a construction joint shall be formed at the place of stoppage in conformity with the detail shown on the drawings for construction joints generally and in the manner which will least impair the durability, appearance and proper functioning of the concrete. The Department shall approve the method adopted for forming the construction joints, one of the following methods being adopted, as relevant:—

- a) Construction joints when concrete is not more than 24h old: —The surface of the concrete shall be brushed with a steel wire brush before new mortar and concrete are placed as specified in (b) below.
- b) Construction joints when concrete is more than 24h but not more than 3 days old: The surface of the concrete shall be sand-blasted or chipped with a light hammer, swept clean, and thoroughly wetted and covered with a 10mm thick layer of mortar composed of cement and sand mixed in the same ratio as the cement and sand in the concrete mixture. This mortar shall be freshly mixed and placed immediately before the new concrete is placed.
- c) Construction joints when concrete is more than 3 days old: The procedure specified in (b) above shall be followed, except that the old surface shall be prepared and kept continuously wet for at least 24h before the mortar and new concrete are placed.
- d) Construction joints at tops of columns: The procedure for brushing or cleaning specified in (a) or (b) above, as applicable, shall be followed before the steel reinforcement of the slab or floor to be cast on the columns is placed in position.

Curing and protection: — Formwork shall be retained in position for the appropriate period given in the clause "Removal of Formwork" and shall be considered as providing adequate curing on those surfaces for that period. Should this curing period still be less than that specified, alternatively, should surfaces not be cured by forms then all such concrete shall immediately be protected from contamination and loss of moisture by one or more of the following methods: —

- a) ponding the exposed surfaces by means of water, except where atmospheric temperatures are low, i.e., less than 2°C,
- b) covering the concrete with sand, or mats made of a moisture-retaining material, and keeping the covering continuously wet;
- c) continuous spraying of the exposed surfaces with water;
- d) covering with a waterproof or plastic sheeting firmly anchored at the edges.
- e) using a prior approved curing compound applied in accordance with the manufacturer's instructions, provided that in this case, the presence of the compound is not detrimental to subsequently applied finishes.

Whatever method of curing is adopted, its application shall not cause staining, contamination, or marring of the surface of the concrete.

The curing period shall be at least 5 days for concrete made with Portland cement, at least 2 days for that made with rapid-hardening Portland cement and at least 7 days if Portland blast-furnace cement is used. When atmospheric temperatures are below 5° C these minimum curing periods shall be extended by 72, 36 and 72 hours respectively.

CONSTRUCTION DETAILS

Holes, Chases and Fixing Blocks: — No holes or chases other than those shown on the working drawings or approved by the Department shall be cut or otherwise formed in the concrete. No blocks for the attachment of fixtures shall be embedded in the concrete unless approved by the Department.

Pipes and Conduits: — No pipes or conduits other than those shown on the working drawings shall be embedded in the concrete without the approval of the Department. The clear space between any such pipes and the clear distance between such-a pipe and any reinforcement shall be at least 25mm or the maximum size of the coarse aggregate plus 5mm, whichever is greater. The amount of concrete cover over pipes and fittings shall be at least 25mm.

Honeycombing and Other Defects: — After removal of the forms, if the concrete shows any defect in terms of the Specification for Finishes for that concrete, the Contractor shall, on the instructions of the Department, make good the defect at his own cost, by either removing and replacing the defective concrete, or by patching, all as approved by the Department and to the standard of finish required. No remedial work shall be carried out by the Contractor without the prior approval of the Department.

Building on Concrete Footings: — No structural load shall be imposed on concrete footings until at least three days after depositing the concrete in the case of mass concrete footings and after seven days in the case of reinforced concrete footings, or as may be directed by the Department.

RECORDS: —The Contractor shall maintain written records indicating: —

- a) the date on which each section was concreted, the time taken to place the concrete, and the position of that section in the Works and its construction joints;
- b) daily weather conditions with temperatures being recorded by maximum and minimum thermometers and
- c) the nature of samples and dates on which they were taken. In the case of cubes these shall also state the identification marks, test results and age, minimum strength required and position of parent concrete.

TESTS

Compressive Strength: — During the time in which each class of concrete, having a specified 28 day compressive strength equal to or greater than 20 MPA, is being placed, samples of the concrete shall be taken from the point of deposit at the rate of at least one sample from each 5m³ of concrete placed in columns, and from each 30 m³ or part thereof of concrete placed elsewhere, but in either case, nevertheless at least once a week. A group of at least three 150mm test cubes shall be made from each sample for testing at 28 days age. If the Contractor plans to execute further work which relies on previously completed work for support but for which the results of 28 day tests are not available, he is to prove the strength of that concrete by taking and testing at 7 days age an equal number of test cubes to that which is to be tested at 28 days age, prior to the commencement of the planned further work.

The cost of the necessary extra test cubes and testing will be for the Contractor's account. Each group of test cubes shall be deemed to represent the whole of the concrete from which sample was taken and shall be identifiable with the concrete.

The Contractor shall provide, at his own expense, sufficient moulds to keep pace with the rate of concreting. He shall also perform all tasks in respect of compressive strength testing except the actual crushing.

If ready-mixed concrete is used, site testing as specified herein shall still be undertaken, and only the results of such site testing shall be considered in determining the acceptance or otherwise of the concrete.

Grading Analysis: — If so directed by the Department, a grading analysis shall be made for each 40m³ of fine aggregate to be used and for each 75 m³ of the coarse aggregate to be used. The analysis shall be made by the method given in SANS Specification 1083.

Determination of Consistency: — When the slump test is used to measure the consistency of the concrete mix, it shall be carried out by the method given in SANS Method 862 with samples taken in accordance with SANS Method 861.

Costs of Tests: — to concrete, trial mixes, cement, aggregates, water and reinforcing steel shall be borne by the Contractor. The Contractor shall also bear the costs of any other tests (including load tests), which are required as a result of failure on the part of the Contractor to meet the requirements of the Specification.

An item against which the Contractor may allow for all costs in connection with tests on concrete cubes has been included elsewhere in these Bills of Quantities.

Testing Authority: — The crushing of cubes and testing of other samples except in the case of the clause "Determination of Consistency" shall be undertaken by an independent Authority as approved by the Department. The Contractor shall arrange with the Authority that copies of the results of all tests are sent direct to the Department.

ACCEPTANCE CRITERIA FOR STRENGTH OF CONCRETE: — Should any test result obtained from a set of three test cubes of concrete of a specific grade that have been made and tested as specified show that the strength is more than 3 MPA below the specified strength, the concrete represented by such results shall be deemed to have failed to meet the Specification. Should an examination carried out in terms of the clause "Procedure in the event of failure" satisfy the Department that the structural adequacy and durability of that part of the structure where the concrete concerned has been used, is not impaired, the concrete will be acceptable. The Contractor will however be required to review the mix design and any other factors influencing the quality to ensure that further concrete is acceptable.

Where three or more consecutive valid test results (i.e., results of sets of three test cubes that have been made and tested as specified) become available, the following criteria shall apply: —

- a) The average of any three consecutive valid test results obtained on concrete of a specific grade must exceed the specified strength by at least 2 MPA.
- b) If the criterion given in (a) above is not met but the average is at least equal to the specified strength, the concrete cast will be acceptable but the Contractor will be required to adjust the mix design and standard of control.
- c) Should the average result be less than the specified strength, an examination must be carried out in terms of the clause "Procedure in the event of failure" on that part of the structure in which concrete represented by the result has been used.

Alternatively, should a concreting operation be of such size or the testing be of such frequency that thirty or more valid test results (i.e., results of sets of three test cubes that have been made and tested as specified) become available within three months, the Contractor may choose, subject to the approval of the Department, to have the results assessed statistically. In such a case, the average of all the test results of a specific trade of concrete at *any stage* must exceed the specified strength by at least 1,7 standard deviations, failing which the Contractor will be required to adjust the mix design to ensure compliance with this criterion.

PROCEDURE IN THE EVENT OF FAILURE: — If after the evaluation of the test results in terms of the clause "Acceptance criteria for strength concrete" an examination of the concrete in the structure is necessary, one or more of the following procedures in the sequence given may be adopted at the discretion of the Department, and for the account of the Contractor, to determine the acceptability or otherwise of the concrete in that particular part of the structure: —

- a) An assessment of the stress level in the structure concerned in relation to the test result obtained.
- b) Non-destructive testing, subject to the availability of similar concrete of proven acceptable quality in comparable members in the same construction as a reference.
- c) The testing of drilled cores in accordance with the relevant SANS Standard Methods.
- d) Full scale load tests in accordance with Section 6 of SANS Code of Practice 0100: Part II.

Where load tests are, in the opinion of the Department, unsuitable or impracticable, and if an examination carried out in terms of the above does not show the concrete strength

to be acceptable, or if a tested portion of the structure fails to pass the tests, the Contractor shall, on the instructions of the Department, replace or strengthen by approved means: —

a) each portion that failed or contains concrete that failed, as relevant, and

b) any other portion, irrespective of strength, the functional purpose of which is affected by the portion or concrete referred to in (a) above.

NON-STRUCTURAL PRESCRIBED MIX CONCRETE: — Concrete for non-structural purposes shall be "Prescribed mix concrete" produced in accordance with the requirements indicated in the table below, and the Contractor is also referred to the foregoing Preambles insofar as they apply: -

TABLE E - PRESCRIBED MIX CONCRETE FOR NON-STRUCTURAL PURPOSES

Class of Concrete	Estimated minimum compressive	Maximum nominal size of	Prop	portion of Const	iituents
	strength in MPA at 28 days	coarse aggregate in mm	Cement (Parts)	Fine Aggregate (Parts)	Coarse Aggregate (Parts)
A B C	1 15 20	37,5 19,0 19,0	1 1 1	4 3 2 ½	8 5 3 ½

Cement and aggregates shall be mixed by volume and the contents of a 50 kg sack of cement shall be taken to be 0.033 m3

The cement / water ratios and the maximum and minimum slumps for concrete shall be as previously listed in Tables C and D.

The Department shall have the right to vary the proportions of the constituents in any of the prescribed mixes as necessary to obtain the required compressive strength, optimum density and workability of the concrete. Any variation in the rates of the concrete will only be considered if the proportion of cement to the total volume of aggregate, in each case, is varied from that Specified.

Notwithstanding any requirements previously described, the Department may permit certain items of non-structural concrete in small quantities to be mixed by hand.

Where concrete is mixed by hand, the coarse aggregate shall be spread out on a timber, concrete or metal platform in a flat heap, the sand-then spread evenly over the heap, followed by the cement also spread evenly, and the whole thoroughly mixed by shovelling from the centre to the side to form a ring, then back to the centre and again to the side. Water shall then be poured into the ring and the materials mixed into it and then back into the ring, the remainder of the water then added slowly as materials are mixed into it. Mixing shall continue until the colour is uniform and the consistency the same throughout the pile.

"NO-FINES" CONCRETE: — shall consist of one part of cement to eight parts of 19mm aggregate (1:8- 19mm stone) with a water/cement ratio of approximately 0, 46. This water/cement ratio may be varied slightly to suit conditions on approval by the Department.

The quantity of water used shall be just sufficient to form a smooth grout, which shall completely coat every particle of aggregate, and also to ensure that the grout is just wet enough to form a small fillet at each point of contact between the stones. 'No-fines" concrete mixed with excessive water, which results in a thin grout which drops off the aggregate, will be rejected.

"No-fines" concrete shall be placed in its final position within 20 minutes of mixing and shall be placed in continuous horizontal layers. "No-fines" concrete shall be spade worked sufficiently to ensure that it fills the forms but vibrating, tampering or ramming will not be permitted.

BREEZE CONCRETE: — shall consists of one part cement to eight parts clean dry furnace ashes, the ashes being free from all coal or other foreign matter and graded up to particles which will pass a 26.5mm ring from a minimum which passes a 4.75mm mesh. The finer materials from the screening to be first mixed with the cement into the mortar and the ashes added afterwards and thoroughly incorporated. The breeze concrete is to be mixed in batches not exceeding 0, 1 in 3 and each batch is to be immediately placed in position. The ashes for breeze concrete are to be obtained in an unscreened state and are to be kept dry so that sufficient fine material will be obtained from the screening to make the mortar.

FINISHES TO IN-SITU CONCRETE

Formed Finishes: — are the concrete surface finishes developed using formwork and whose standard of finish in each class shall be as described.

The Department shall be informed by the Contractor of any defect in terms of this Specification, and no remedial work shall be carried out by the Contractor without the prior approval of the Department. Any defect shall be made good at the Contractor's expense by either removing and replacing the defective concrete, or, in certain instances only, by patching, all as approved by the Department and to the standard of finish required.

Class F1 Ordinary Finish: — Formwork panels shall be of such quality that upon removal, the concrete is true and even, free from fins and recesses greater than 5mm size, honeycombing, large air holes and the like. Bolt holes shall be filled if so required by the Department.

Class F2 Smooth Finish: —This class of finish requires a high standard of concrete work, formwork and technique.

Concrete placed in any one structure to give this finish shall be made from cement and aggregates from the same source, and similarly, the grading of the aggregate shall be kept constant.

Formwork shall be metal or wrot timber in a new condition designed and constructed to suit the particular job in hand and with shutter bolts and joints between panes in a pattern approved by the Department. Joints between panels shall be watertight, but the use of sealing tape, which marks the concrete, shall not be permitted.

Construction joints shall be in the position and of the detail shown upon the working drawings. Should the Contractor wish to incorporate further construction joints or amend the position of those shown to suit his own requirements or technique, this may be allowed provided that all design considerations are met, that the prior approval of the Department is obtained and that any extra costs are borne by the Contractor. In the case of horizontal construction joints, the top edge of the concrete on the Class F2 smooth finish side is to be struck true and level with a trowel.

Special care shall be taken to ensure that forms are clean of all pieces of tying wire, nails and other debris at the time of concreting.

The standard of finish shall be such that, upon removal of the formwork, no further treatment, other than treatment of bolt holes if required shall be found necessary to provide a straight, smooth and uniform finish of good quality and consistent colour and texture, free of all honeycombing and large air holes.

UNFORMED FINISHES: — are those concrete surface finishes developed without the use of formwork -

Class U1 Ordinary Finish: — Immediately after placing, the concrete shall be finished by screeding with the edge of a wooden board of straight and true line and working between guides set accurately to level. No mortar shall be added and noticeable surface



irregularities caused by the displacement of coarse aggregate shall be made good by rescreeding after removing or tamping down the offending aggregate.

Class U2 Wood Float Finish: — The concrete surface shall first be brought to the standard Class U1 ordinary finish and then floated with a wood float. Floating shall be started as soon as the screeded finish is stiffened sufficiently and the bleed water has evaporated or been removed and it shall be the minimum necessary to produce a surface free from screed marks and uniform in texture.

Class U3 Steel Trowel Finish: — The concrete surface shall first be brought to the standard of Class U2 wood float finish with floating being continued until a small amount of mortar without excess water is brought to the surface and then when the floated surface has hardened sufficiently to prevent any more excess fine material from being drawn to the surface, troweling with a steel trowel. Troweling shall be performed with firm pressure such as will flatten the sandy texture of the floated surface and produce a dense uniform surface free from blemishes and trowel marks. Gradual surface irregularities shall not exceed 5mm over any 3m. The sprinkling of sand and/or neat cement on the surface to absorb excess moisture shall not be permitted.

Class U4 Power Float Finish: — The concrete surface shall first be brought to the standard of Class U1 ordinary finish using wooden screeding boards or steel rollers. After evaporation or removal of all bleed water and immediately the concrete is stiff enough to support the machine the surface shall be closed with a mechanical power float and then finished with a mechanical power trowel. The texture of the finished surface shall be either non-slip or polished as shown on the drawings. Irregularities shall be of long wavelength not exceeding a curvature of 2mm in 600mm. Under no circumstances shall sand and/or neat cement be sprinkled over the surface either to absorb excess moisture or to fill surface blemishes or irregularities. Power floats and trowels shall be operated by skilled operators.

TOLERANCES: — Clause 6 of SANS Specification 1200G refers. Unless otherwise agreed by the Department, 'Degree of Accuracy' shall apply to all concrete work and steel reinforcing.

SUPERVISION: — The construction of all concrete work shall, at all times, be under the supervision of a competent person experienced in the production and placing of high-grade concrete. He shall personally supervise all work relating to the concrete construction and pay special regard to: —

a) The quality, testing and mixing of materials.

b) The finish, stability and cleanliness of formwork and excavations.

c) The cleanliness, correct positioning and maintenance in position of steel reinforcement.

d) The transporting, placing, compacting and curing of the concrete. The construction and stripping of formwork.

e) The production of samples, test cubes, slump and other tests.

GENERAL

Measurement and Payment: — The provisions of Clause 8 of SANS Specification 1200G will NOT apply and the system of measurement that is adopted in these Bills of Quantities is the only system of measurement that will be recognised in this Contract.

No deductions have been made for pipes not exceeding 200mm internal diameter, reinforcement, conduits, structural steel, bolts and the like.

Rates for Concrete: — are to include for mixing, handling and depositing (by hoisting or lowering) in the forms. Rates for items of reinforced concrete are to include for thoroughly working and packing around the steel reinforcement. All reinforcement, except where otherwise described, has been measured separately.

Rates for concrete surface beds are to include for laying in suitable size panels not exceeding 20m^2 or as may be directed. The Contractor is to allow in his pricing of the concrete for all construction joints.

Striking off and Curing: — of concrete slabs and surface beds has been measured separately. The rates for all other items of concrete including stairs and landings and concrete bindings, are, except where otherwise described, to include for all necessary striking off of surfaces and curing.

The rates for items of striking off and curing top surfaces of concrete shall, unless otherwise described, apply to level surfaces.

Where exposed sloping surfaces of concrete do not exceed the limits of pitches laid down for the measurement of back shuttering, the striking off and curing of the sloping top surfaces has been measured in the case of concrete slabs and surface beds, and in other-cases provision has been made for dressing the concrete surfaces to splay.

Where items of striking off and curing are described as to falls or ramps this shall include cross-falls, etc.

The rates for striking off and curing of surface beds formed in panels must also include for all necessary temporary formwork in forming the panels.

Rates for Formwork: — are to be for use and waste only (except where described as "permanent") and are to include for fitting together in the required forms, propping, strutting, shoring, wedging, plumbing and fixing to true angles and surfaces, cambering formwork to slabs and beams where required, preparation and treatment of surfaces as necessary to ensure easy release during stripping, reconditioning as necessary before re-use, providing necessary temporary openings for the purpose of cleaning, inspection and placing of concrete, and for all straight cutting, splayed edges, intersections, notching and narrow widths, including waste and properly fitting at intersections, maintaining in position for periods as directed and for striking and removing.

Rates for items of formwork to soffits of slabs and to sides and soffits of beams, lintels and the like are to include for horsing exceeding 1,5m and not exceeding 4,5m high unless otherwise stated in the items.

Rates for formwork to soffits of stairs and landings are to include for all necessary horsing.

Rates for Permanent Formwork: — are to include for leaving in all formwork, props, etc. as permanent formwork shall be regarded as not being recoverable.

Rates for Steel Fabric Reinforcement: — are to include for lapping the reinforcement at all edges, as specified, for all cutting and waste, notching, etc. bending where required, wiring together at laps and for maintaining in position during placing of concrete.

Rates for Steel Bar Reinforcement: — are to include for all cutting, bending, hooked ends, wiring together at passing points, hoisting or lowering to the required levels, fixing in accordance with the detail drawings, cover blocks and maintaining in position during placing of concrete. The mass of mild and high yield stress steel bars shall be based on the values shown in Table EI of SANS Specification 920— Appendix E (with no allowance being made for rolling margin and waste).

The mass of the binding wire required for fastening the reinforcement together is not included in the mass of the reinforcement. Provision for the cost of this wire shall be deemed to have been made by the Contractor in calculating the unit rate for the net mass (i.e. excluding the mass of binding wire) of the reinforcement.

4. BRICKWORK

SAND: — shall comply with the requirements of SANS Specification 1090, washed where necessary and screened through a 2360 micrometer mesh sieve.

CEMENT: — shall be Portland cement of normal setting quality complying with SANS

Specification 471 or Portland cement 15 complying with SANS specification 831. Cement containing more than 15 % blast furnace slag will not be permitted to be used.

LIME: — shall be hydrated lime complying with SANS Specification 523.

WATER: — shall be clean and free from injurious amounts of acids, alkalis, and other organic substances. If so required by the Department, the suitability of the water shall be proved by tests carried out by an approved laboratory.

CEMENT MORTAR: — unless otherwise described, shall be composed of one part by volume of cement to five parts by volume of sand.

COMPO MORTAR: — unless otherwise described, shall be composed of one part by volume of cement, one part by volume of lime to ten parts by volume of sand.

STRENGTH MORTAR: —where required, shall be of the class specified and as defined in Table C-I of SANS Code of Practice 0164—Part I.

MIXING OF MORTAR: — the materials are to be mixed dry on a non-absorbent and close jointed timber or iron platform until the mixture is of uniform colour with water added and the mixture turned over until the ingredients are thoroughly incorporated.

No cement mortar that has once commenced to set will be allowed to be used. Mixing platforms are to be cleaned and old mortar removed before any new batch of mortar is prepared for mixing. No mortar mixing by adding additional materials is permitted after 5 (five) hours.

TESTING OF STRENGTH MORTAR: — During the time brickwork is being laid samples shall be taken of the mortar being used as shall be directed by the Department. A group of three 70mm x 70mm x 70mm test cubes shall be made from each sample for testing at 28 days of age. Each group test cubes shall be deemed to represent the whole of the batch from which the sample was taken and shall be identifiable with the batch.

The testing shall be undertaken by an independent firm or institution nominated by the Contractor to the approval of the Department. An item for the testing of mortar cubes has been provided elsewhere in these Bills of Quantities.

BURNT CLAY COMMON BRICKS: — shall comply with SANS Specification 227 and are to be good quality, sound, hard, well burnt bricks, uniform in size and shape.

A sample load of bricks is to be approved by the Department and all subsequent loads are to be equal thereto.

BRICKS FOR FOUNDATIONS: — are to be as above but extra hard burnt bricks. Reject facing bricks may be used in lieu of extra hard burnt foundation bricks provided they are equal to a sample to be submitted to and approved by the Department. These bricks are also to be used for septic tank walls.

BRICKWORK: —unless otherwise described is to be in burnt clay common bricks and wherever practicable is to be in stretcher bond with the skins tied together with and including galvanized crimped wire wall ties in accordance with SANS Specification 28. The wire ties are to be of sufficient length to allow each end to be built into brickwork built into every fourth course and spaced at 450mm staggered centres (seven ties per square metre). The bricks are to be well wetted before being laid and the course of bricks laid last is to be well wetted before bedding the next course of bricks upon it. The brickwork is to have all perpends flushed up solid and each course is to be laid on a solid bed of mortar. No false headers are to be used. Whole bricks are to be used except where bats or closers are legitimately required to form bond.

Unless otherwise described one brick walls are taken at a nominal thickness of 230mm.



The joints of all walls to be plastered are to be raked out as the work proceeds to form key for plaster. All walls are to be carried up regularly so that no part is built more than 1,2m higher than the adjoining walls.

Mortar joints generally are not to exceed 10mm thickness unless otherwise indicated on the drawings. If a specific brick scale is indicated on the drawings, either drawn or written, it must be adhered to.

Solid bricks to X-Ray Room walls are to be used. If hollow core bricks are used, these are to be grouted up solid.

HOLLOW WALLS: — are to be formed of two thicknesses of brickwork as specified with cavity between, tied together, unless otherwise specified, with and including A.I.S.I. Type 304 stainless steel wire butterfly type wall ties in accordance with SANS Specification 23, of sufficient length to allow each end to be built into brickwork, built into every fourth course and spaced at 450mm staggered centres (seven ties per square metre). Cavities are to be kept clear of all rubbish, mortar droppings and projecting mortar.

BRICK LININGS TO CONCRETE: — unless otherwise described are to be tied to concrete with and including A.I.S.I. Type 304 stainless steel wire wall ties complying with SANS Specification 28 with one end embedded is to deep into concrete and other end built into the brick joints and spaced not less than seven ties per square metre.

REINFORCED BRICK LINTELS: — unless otherwise detailed are to be constructed in accordance with KZN Public Works Type Drawing.

PRE-CAST AND PRE-STRESSED CONCRETE LINTELS: — where specified, are to be of approved manufacture and the Contractor is to provide the Department with a certificate issued by the manufacturer certifying that the lintels are adequate for the purpose in terms of span, loading and number of courses and construction of brickwork above the lintel. The manufacturer is also to specify the minimum bearing required at each bearing end and the nature and period of temporary propping required. Rates or pre-cast pre-stressed concrete lintels are to include for any cement mortar filling required and for temporary propping in accordance with the manufacturer's instructions.

BAGGING DOWN BRICKWORK: — shall be carried out when the mortar in joints is still soft by rubbing over with wet rough sacking until all joints and crevices are evenly filled, including additional mortar if necessary to obtain an even surface or, when the mortar in joints is set, by rubbing over as described but including cement grout as necessary to fill up the joints and crevices.

CRAMPS: — for timber door frames shall be 1.6mm thick galvanized hoop iron 32mm wide with one end turned up 50mm and twice screwed to stile of frame and built 450mm deep into wall with other end turned up into brick joint and cranked as necessary where built into cavity wall. Cramps shall be built in approximately 330mm from top and bottom of stile and intermediately at not exceeding 825mm.

TIES TO WALL PLATES, RAFTERS, ETC.: — shall be 1.6mm thick galvanized hoop iron 32mm wide and at least 1500mm long with one end turned up and built in not less than ten courses deep into brickwork or embedded in concrete beams or slab and with end left projecting and wrapped around timber rafter and spiked to timber wall plate. Where ties are embedded to concrete beam or slab, they must be wrapped around the bottom steel bar reinforcement of the beam or slab.

WELDED MESH BRICK REINFORCEMENT: — shall be 55mm, 80mm, 155mm or 235mm wide consisting of two 3.55mm main high tensile steel wires at 50mm, 75mm, 150mm or 230mm centres respectively with 2.80mm high tensile-steel cross wires electrically welded at 300mm centres, lapped 150mm at end joints, 75mm at angles and built 110mm into connecting walls. No allowance has been made for laps.

BITUMEN EMULSION WATERPROOFING TO BRICKWORK: — The inner thickness of external superstructure walls whether hollow or solid, behind facing bricks, is to be bagged and painted with two coats of approved bitumen emulsion waterproofing compound.

FACING BRICKS. PAVING BRICKS, QUARRY TILES, ETC.: — Facing bricks shall comply with SANS specification 227. Facing bricks, paving bricks, quarry tiles, terra cotta grille blocks, etc. are to be of the types and colours specified, specially selected, free from blemishes, square on all faces, uniform in size, shape and colour and equal to a sample to be deposited with and approved by the Department.

Special care must be taken to preserve the arrases and faces of facing bricks, paving bricks, quarry tiles, etc. during transit and handling.

FACED BRICKWORK: — Facing bricks shall be sorted to ensure proper mixing of the bricks within the colour range of each type of facing bricks. Sudden changes in the general colour of faced brickwork in any one type of facing brick will not be acceptable. Sand used in mortar for faced brickwork is to be clean washed sand and sand from the same source is to be used throughout to maintain a uniform appearance. Faced brickwork is to be pointed as specified as the work proceeds. Keyed-in joints are to be formed with a round jointing tool and square recessed joints are to be approximately 6mm deep formed with a square jointing tool. All perpends are to be accurately kept. The bond is to be broken, if necessary, in the centre of panels above and below windows, above doors, between openings and in the centre of sides to piers. No broken bond will be allowed at reveals or quoins. All cutting to face bricks is to be done with a carborundum or other approved highspeed brick saw. Faced brickwork is to be protected from injury, mortar splashes, etc. and cleaned down with spirits of salts and scrubbed down with water at completion to the approval of the Department.

PAVING BRICKS AND QUARRY TILES: — unless otherwise described are to be pointed as the work proceeds with 6mm wide keyed-in joints. Paving bricks and quarry tile paving, sills, etc. are to be protected from injury, mortar splashes, etc. and cleaned down with spirits of salts and scrubbed down with water at completion to the approval of the Department.

FIBRE CEMENT SILLS: — are to be of approved manufacture without fixing lugs, even in shape, uniform in colour, free from cracks, twists and other defects, in single length between reveals and of the thickness and colour specified and equal to approved sample.

RATES

Brickwork Generally: — Rates for brickwork are to include for hacking the face, or raking out the joints, of brickwork where necessary to form key for plaster, etc. and for plumbing angles and surfaces, all square cutting, wedging and pinning against columns, beams, slabs, etc. for all waste in cutting and wire ties required in tying skins together as described.

Rates for hollow walls are to include in addition to the above for keeping the cavities clean and free of mortar droppings and for butterfly type wall ties, all as described.

Where items are described as cut and pinned, built in, bedded, wedged and pinned, etc. rates are to include for grouting in or bedding solid with 1:3 cement mortar, unless otherwise stated.

Where window units, etc. are described for building in as composite, rates are to include for assembling of units as required and, unless otherwise described, for tap screwing to coupling mullions or transoms, including holes:

Faced Brickwork, etc.: — Rates for all fair and faced brickwork, brick paving, grille block walls and the like are to include in addition to the foregoing for building or laying to true surfaces and angles, all fair square cutting and fitting and cleaning down to approval at completion.

Rates for brick sills, copings, steps, margins, thresholds and the like shall include for fair ends and angles unless different bricks or tiles are used or special cutting is required.

Rates for items described as "Extra over ordinary brickwork" are to be for the extra cost of the facing bricks specified over common brickwork built in stretcher bond, and are to include for building in cement mortar consisting of one part cement to five parts clean washed sand and for pointing as described.

Rates for items described as "Labour and Material" are to be for the full cost of the facing bricks specified, and otherwise as above described.

Rates for all cut face brick linings are to include for cutting and bonding at ends.

Quarry Tiles: —Rates are to include for all square cutting and fitting, bedding and jointing in cement mortar consisting of one part cement to three parts clean washed sand, for pointing as described as the work proceeds and cleaning down to approval at completion.

Rates for treads, sills, copings, cappings, skirtings etc. are to include for pointing to exposed edges, ends and projecting soffits.

Air Bricks: — Rates for air bricks and air vent, gratings are to include for forming openings through the walls, for all necessary jack arches and turning pieces, for plastering all round the openings in cement mortar, and where in hollow walls, for building cavity solid all round in addition.

Fibre Cement Sills: — Rates are to include for all square cutting, waste, and fitting and for bedding in an approved epoxy adhesive.

Terra Cotta Grille Blocks: — Rates are to include for all square cutting and waste and fitting, bedding and jointing in cement mortar consisting of one part cement to three parts clean washed sand and for pointing with keyed in joints on both faces and into reveals of openings as the work proceeds.

5. WATERPROOFING

GENERAL: — All measurements are nett — no allowance being made for laps in sheet materials or for waste in cutting.

WORKMANSHIP: — All work is to be carried out to the approval of the Department by skilled and qualified workmen and in accordance with the methods prescribed in SANS Code of Practice 021 for waterproofing of buildings.

All work is to be executed in accordance with the instructions issued by the manufacturer of the material being used. Roof coverings and linings are to be laid to the fails, cross falls, etc. provided in the screeds or other surfaces to which they are to be applied.

Surfaces to be waterproofed are to be dry and cleaned of all dust, chips, etc. immediately prior to the commencement of this work and are to be free of any contaminating substances or projections that may damage the waterproofing materials being used.

POLYETHYLENE SHEETING: — is to comply with SANS Specification 952 and bear the SANS mark. The sheeting is to be laid with a minimum lap of 150mm, unless otherwise specified, at angles and junctions with laps sealed in accordance with the manufacturer's instructions.

MASTIC ASPHALT ROOFING: — is to conform to SANS Specification 297 and is to be laid hot in two or three layers, as stated, with each layer of minimum 4mm thickness and laid to break joint with the underlying layer by not less than 150mm.



Prior to the commencement of any work, the specialists who lay the mastic asphalt roofing are to satisfy themselves as to the acceptability of the surfaces upon which the mastic asphalt is to be laid, as the said specialists will be held fully responsible therefore.

Mastic asphalt to surfaces not exceeding 10-degree slope is to be laid in two layers on and including one layer of approved reinforced waterproof building paper lapped 75mm at all edges. Rates are to include for all cutting and waste on building paper.

Mastic asphalt to surfaces exceeding 100 and not exceeding 200 slope is to be laid in two layers on surfaces which have been hacked, grooved or scoured to provide an adequate key. Rates are to include for the necessary preparation of the surfaces.

Mastic asphalt to vertical surfaces and surfaces exceeding 20-degree slope is to be laid in three layers on and including any necessary expanded metal lathing securely fixed to the surfaces to prevent creeping. Where vertical surfaces do not exceed 300mm in height the surfaces to receive mastic asphalt may alternatively be prime coated with a latex based bitumen emulsion primer prior to the application of the mastic asphalt.

Anile fillets to all internal angles are to be run in one operation.

Finishing coats of bituminous-based aluminium paint on mastic asphalt roofing have been measured separately.

FLEXIBLE GLASS-FIBRE REINFORCED POLYESTER WATERPROOFING: — shall be of the type specified, or other approved, supplied and laid in-situ by a specialist subcontractor, all to the approval of the Department and shall carry a written 10 (ten) year quarantee.

The waterproofing applied in-situ shall consist of one layer of three-ply bituminous felt underlay bonded to the substrate and covered with flexible glass-fibre reinforced polyester waterproofing comprising a chopped strand glass-fibre mat having a minimum mass of 450g / m², impregnated with flexible unsaturated polyester resin and finished with two coats of abrasion-resistant flexible unsaturated polyester surface coating which shall not show any sign of the glass-fibre reinforcement. The total mass of the waterproofing (excluding the bituminous felt underlay) shall be not less than 1.8kg / m2.

Chopped strand glass-fibre mat reinforcement is to comply with the requirements of SANS Specification 419.

All unsaturated polyester resins are to be suitable for their intended use and comply with SANS Specification 713 and are to be ultra-violet ray stabilised.

All flexible glass-fibre reinforced polyester waterproofing is to be finished to approved opaque colours (excluding red or orange tints), is to be properly cured, and is to be free from porosity, blisters, cracks, surface crazing or other defects which may affect its appearance or its performance, with the surface colours consistent throughout.

Samples of flexible glass-fibre reinforced polyester waterproofing are to be submitted to and approved by the Department and all work executed is to be equal to the approved samples.

EXPANSION JOINT SEALANTS: - Polysulphide sealants, where specified, are to be approved polysulphide sealants complying with SANS Specification 110 Type 2, well compacted into joint.

Rates are to include for priming joints where recommended by the manufacturer of the sealant being used with a suitable and approved primer.

All work is to be executed by the manufacturer of the material, or other specialist firm, all in accordance with the manufacturer's instructions.

RATES: — for all roofing and linings are to include for cleaning and preparing the surfaces to be waterproofed as before described, for protecting from damage and cleaning down, flood-testing if required and handing over in an acceptable and guaranteed watertight condition at completion.

Rates for sheet waterproofing materials are to include for all dressing, bending, narrow widths, angles, intersections, cutting and waste and where applicable for the extra material required for lapping and for sealing laps as described.

Rates for roofing described as laid on "flat" roofs are to include for laying to slopes not exceeding 100mm from the horizontal.

6. ROOF COVERINGS

CONCRETE ROOFING TILES: — shall conform to SANS Specification 542. The tiles are to be of pattern and colour specified and is to be even in thickness, uniform in shape and colour and free from cracks and blemishes. The tiles are to be laid to "straight bond" in accordance with SANS Code of Practice 062 with vertical joints and bottom edges of each course ranging perfectly straight.

Unless otherwise specified each tile in every third course, all tiles in eaves and ridge courses and tiles in every course on each side of hips and valleys shall be secured with copper clout headed nails driven into the battens or with approved non-corrodible tile clips and nails in accordance with the manufacturer's instructions. Where nail holes in tiles have been cut off at hips, valleys, top edges, etc. new holes are to be drilled.

All ridge and hip cappings are to be of the types specified and of colour to match the roofing tiles. The cappings are to be bedded, jointed, pointed and torched up over roofing tiles in 1:3 cement mortar tinted to match the tiles. Where cappings having butt jointed ends are specified, an approved damp proof course conforming to Type C of SANS Specification 952 is to be fixed under, laid over the roofing tiles in accordance with the manufacturer's instructions.

Barge cappings are to be of the types specified and of colour to match the roofing tiles. The barge capping tiles are, unless otherwise specified, to be bedded, jointed, pointed and touched up over roofing tiles in 1:3 cement mortar tinted to match the tiles with every tile drilled and secured with copper clout headed nails to timber barge boards or bearers (elsewhere measured).

Concrete tiles to residential units in non hail area's are permitted.

"CHROMODEK" ROOFING SHEETS: - Shall be the secret fixed type, supplied with all fittings in full-length sheets in the profile and colour as specified. Sheets shall be a minimum of .58mm and maximum of .8mm thickness. When .58 thick sheets are used, purlin spacings shall be a maximum of 1.2mtr¢ and maximum 1.5mtr¢ for .8 thickness. Sheets shall leave the factory in the specified colour and any scratches etc., due to handling are to be 'touched up' on site after installation. All fixings, valleys, cappings and securing clips shall be to manufacturers' recommendations and no variations shall be accepted without prior approval from the department.

0,58mm thick roof sheeting for purlins up to 1,2m spacing and 0,8mm thick roof sheeting for purlins exceeding 1,2m – 1,5m spacing.

In area's up to 30Km from the coast, metal roof sheeting to be 0,58mm thick with special corrosion protection as supplied in "Global- Duro" roofing sheets. All other area's to be 0,58mm as "Global-Tech corrosion protection. 0,58mm "Klip Lock 700" or "Craflock" and 0,8mm "Brownbuilt". (0,8mm is recommended for high rainfall and snow fall area's due to deeper trough.)

RATES: — for roof coverings, are to include for all necessary half tiles at verges and for all square cutting and waste at verges, abutments, and top and bottom edges and to both sides of ridges.



Rates for cappings, etc. are to include for all short lengths, cutting, waste and fitting at intersections.

All measurements are nett. No allowances have been made for overlaps.

CORRUGATED IRON ROOFING, CLADDING AND FITTINGS: — are to be of an approved brand and are to be manufactured from galvanized steel sheets of the thickness specified after galvanising and having a galvanized coating of "Iscor Coating Designation Z275" for inland areas and 'Z600" for coastal areas as specified.

Roofing, etc. shall be lapped one and a half corrugations at sides and 30mm at ends unless otherwise specified. Roofing, etc. shall be fixed to timber purlins, rails etc. with standard galvanized drive screws 65mm long and to steel purlins, etc. with 8mm galvanized hook bolts of the lengths stated.

Each screw or bolt shall be fitted with one lead washer and one bituminous felt washer and shall be spaced not less than one screw or bolt to every alternate corrugation across the width at end laps and ends of sheets and at each intermediate purlin or rail.

Rates for roofing, cladding and fittings are to include for: —

- a) Fixing as described.
- b) Bedding washers in an approved mastic sealing compound
- c) Coating projecting ends of hook bolts and nuts with bitumen after fixing
- d) All square notches, square cutting and waste, laps, fitting and drilling. All measurements are nett. No allowance has been made for laps.

FLUTED STEEL ROOFING, CLADDING AND FITTINGS: — are to be approved galvanized fluted steel sheets and fittings manufactured from galvanized steel sheets of the thickness specified after galvanising

(a) Galvanized steel sheets and fittings: — are to be manufactured from galvanized steel having a galvanized coating of "Iscor Coating Designation Z275" for inland areas and of "Z600" for coastal areas as specified with the sheets having a plain galvanized finish and the fittings an embossed galvanized finish. Roofing, etc. shall be fixed to timber purlins, rails, etc. with standard drive crews of the lengths stated and to steel purlins, rails, etc. with 8mm galvanized hook bolts of the lengths stated. Each fixing screw or bolt shall be fitted with washers as recommended by the manufacturer of the roofing

Vertical cladding shall be fixed with broad flutes externally - unless otherwise described - to timber rails with standard galvanized drive screws 50mm long and to steel rails with 6mm diameter x 25mm long galvanized sheet bolts. Each fixing screw or bolt shall be fitted with washers as recommended by the manufacturer of the cladding including drilling steel rails as necessary.

(b) Baked enamel finished galvanized steel sheets and fittings: — are to be manufactured from un-passivated galvanized steel having a galvanized coating of "Iscor Coating Designation Z275" and finished where described in the items, with approved factory applied baked enamel finish of colours to be selected by the Department.

Roofing, etc. shall be fixed to timber purlins, rails, etc. with sherardised or stainless steel drive screws of the lengths stated and to steel purlins, rails, etc. with 8mm diameter sherardised or stainless steel hook bolts of the lengths stated. Each fixing screw or bolt shall be fitted with washers as recommended by the manufacturer of the roofing.

Vertical cladding shall be fixed with broad flutes externally, unless otherwise described, to timber rails with sherardised or stainless steel drive screws 50mm long and to steel rails with 6mm diameter x 25mm long sherardised or stainless steel sheet

bolts. Each fixing screw or bolt shall be fitted with washers as recommended by the manufacturer of the cladding including drilling rails as necessary.

(c) Generally: — where sheet lengths are in excess of 12m these have been measured separately.

Roofing, etc. shall be lapped one flute at sides and 230mm at ends unless otherwise specified. Fixing roofing sheets are to be spaced one every crest along purlins at top and bottom edges of roof slopes and one to every alternate crest along intermediate purlins. Fixings to vertical cladding are to be spaced one to even alternate trough to each rail.

Fittings, unless otherwise specified, are to be lapped a minimum of 150mm and where necessary are to be drilled for and fixed with the fixings securing the roofing and cladding sheets.

Rates for roofing, cladding and fittings are to include for: —

- (a) Fixing as described and in accordance with the manufacturer's instructions.
- (b) Seam bolting all side laps at not exceeding 450mm centres with 6mm diameter x 25mm long sheet bolts or with 20mm x No. 14 self-tapping screws and each screw or bolt is to be fitted with washers as recommended by the manufacturer of the roofing.
- (c) Fixing of fittings where described as fastened to roofing, cladding, etc. with approved pop rivets spaced at not more than 340mm centres.
- (d) Sealing side and end laps of sheeting and end laps of fittings with one continuous strip of approved 5mm diameter pre-formed flexible sealant strip.
- (e) Coating the exposed heads of fixings and fasteners to baked enamel finished materials and cut edges of sheets and fittings with matching touch-up compound supplied by the manufacturer of the sheeting and in accordance with his instructions.
- (f) All square notches, square cutting and waste, laps fitting and drilling. No punched holes will be permitted.
- (g) Taking special care at all times to prevent damage to the finished surfaces of the baked enamel finished materials.

All measurements are nett. No allowance has been made for laps.

7. **CARPENTRY AND JOINERY**

NOMENCLATURE OF TIMBERS: — Timber described as "softwood" is to be South African softwood of the relevant type, grade, etc. as specified.

The names used for imported timbers are those given in Supplement No. 1 to SANS Code of Practice 12 under "Nomenclature of Standard Trade Names of Imported Commercial Timbers used in South Africa" and the Contractor is referred thereto.

TIMBER SIZES: — Sawn and wrot timbers are to be of the full sizes stated.

Where "out of" sizes have been shown for wrot timbers on the drawings, an allowance of 4mm for each wrot face off the sizes shown has been made.

Doors, fanlight, sashes, manufactured boarding, plywood, veneers, etc. must be of the full thickness specified.

Where doors, door frames, fanlights and frames; sashes, windows and frames are measured as numbered items, the overall sizes are given to the nearest 10mm.

Tolerances in nominal dimensions for imported timber shall not exceed the following:

- a) For nominal dimensions up to 76mm the actual dimension may be 2.5mm under for each
- b) For nominal dimensions 76mm and over the actual dimension may be 1.6mm under for



STORAGE OF TIMBERS: — Timber delivered to the site is to be property stacked above ground, either on bearers or platforms under cover and protected from inclement weather.

ORDERS: - for timber, are to be placed immediately after the Contract is signed, as the Contractor will be held responsible for any delay in delivery.

PRE-TREATMENT OF TIMBERS: — All permanent timbers installed in the buildings are to be treated against borer, cryptotermes, termites, and all wood destroying agencies with an approved preventative, all in accordance with SANS Code of Practice 05.

Any surface subsequently exposed by cutting or planing must be touched up with the same preservative solution and rates are to include for all preservative required.

The Contractor is to obtain a certificate from the merchants supplying the treated timber, to the effect that the timber has been treated against wood destroying agencies. Department has the right to remove samples of the treated timber to have tests carried out by the Division of Entomology or any other Authority.

Temporary timber on the site, e.g. shuttering props, etc. must be free from wood destroying agencies. Any timber so affected is to be immediately removed from the site.

Materials which do not comply with the above requirements or are in any way damaged or discoloured by the pre-treatment must be replaced by the Contractor at his own expense, if so directed by the Department.

STRESS GRADING OF SOFTWOOD TIMBER: —The Mechanical Stress Grading of Softwood Timber (Flexural Method) shall be in accordance with SANS Code of Practice 0149.

STRUCTURAL TIMBER: — for carpentry is to be South African softwood in accordance with SANS Specification 563 and, unless otherwise specified, of Stress Grade V4, and branded accordingly. If it is necessary to use sizes that have to be re-sawn, these shall be re-graded and stamped with the respective SANS stress grade mark. Unless this is done, timber which is re-sawn is no longer considered as complying with the specification and shall on no account be used.

BRANDERING / BATTENS: - of cross-sectional size 50 x 50mm and under shall be South African softwood in accordance with SANS Specification 653 and branded accordingly.

JOINERY AND SHELVING: - Softwood for joinery and shelving shall be South African softwood (S. A. Pine) in accordance with SANS Specification 1359 and branded accordingly. All timber for joinery is to be air or kiln-dried to a moisture content of approximately 12 %.

Shelving to linen stores to be timber slatted with wall bands or free standing units as specified.

STRUCTURAL LAMINATED TIMBERS: — are to be of the sizes detailed, wrot on all faces and are to be manufactured by an experienced fabricator to the approval of the Department. Adhesives used must meet the requirements of the current SANS 1204 for external use.

The surface appearance of members shall be Class C (Constructional) or Class S (Selected) as defined in SANS Specification 876 and as stated in the items

FINGER-JOINTED TIMBERS: — are to be manufactured in accordance with SANS Code of Practice 096— "The manufacture of finger-jointed structural timber".



Contractors wishing to use finger-jointed timber must supply a guarantee that the finger jointing complies with the above Code of Practice and that the glue is suitable for the particular member.

JOINTING OF PURLINS, FASCIAS, RAILS, BEAMS, ETC.: —shall, unless otherwise detailed, be as follows: —

Purlins, slating battens, etc. of cross-sectional size 50 x 76mm and under shall be jointed over the rafter. Larger sized purlins may be dealt with in the same way or by using some other suitable, recognised method. All purlins and battens shall be fixed to the supporting rafter by at least one nail skew driven from the direction of the ridge. Where the purlin or batten is fixed at more than 900mm centres, at least two nails shall be used at every fixing point.

Fascias shall be jointed over rafters.

Beams, rails, etc. shall be jointed over a support or at 1/5th span with a recognised joint using bolts, etc.

Roof and floor plates are to be halved at joints, angles and intersections and nailed together.

Floor joists and bearers are to have splayed heading joints nailed together and staggered to occur over bearers and sleeper piers respectively.

Sawn brandering is to be butt-jointed at heading joints and angles and where wrot, is to have splayed heading joints and mitred angles over all point of support.

HARD WOODS: — (Red Meranti and Sapele) are to be best quality, specially selected and well seasoned, free from all sapwood to the approval of the Department and are to be well kiln-dried.

Red Meranti is to be even in grain and colour, selected from "Standard and Better" grade from Malaysia. Sapele is to be *Entaindrophragma cylindrium* of F..A.S. grade.

PREFABRICATED TIMBER ROOF TRUSSES: -

Design: —The design of prefabricated roof trusses, bracing, and secondary members forming part of the total timber roof construction shall be prepared by a professional structural engineer (Truss Systems Engineer) strictly in accordance with SANS Code of Practice 0160 and the superimposed loading, unless otherwise specified, is to be taken as that for inaccessible roofs.


Analysis: — From the configuration and mechanism shown on the tender drawings the Truss System Engineer shall submit, through the Contractor, to the Department detailed calculations and working drawings showing timber sizes, connections, truss dimensions, etc.

This submission must include details of both trusses and bracing as specified below:

a) TRUSSES: The analysis of the truss system is to include diagrams of the trusses with marked up members and nodes showing dimensions, positions of supports and positions and values of applied loads, which, if not specified in the tender documents, must be derived from an approved source of reference which shall be indicated in the analysis. Due account must be taken of any eccentricity particularly at supports.

The analysis must also indicate allowable stresses, internal axial forces, moments and resulting stresses, as well as timber sizes and grades and detailed plate sizes

(b) BRACING: Bracing must be designed to withstand the forces specified in SANS Code of





If the bracing system incorporates trusses, the additional forces must be shown in the analysis of the trusses.

The drawings must give all the information necessary for the construction of the bracing.

An outline of the bracing system, including temporary bracing must be shown on a working drawing giving clear details of fixings and anchorages into the supporting structure at wall plate level. Interference of bracing with truss members must be taken into account. Moments caused by forces applied between node points of bracing trusses and the axial forces must be given in the bracing calculations, also sizes and fixings of the bracing system.

Submissions: — A copy of letter reference TR1 (attached at the end of this document) completed and signed by the Truss System Engineer must be submitted by the Contractor at the same time as the list of Sub-Contractors. Two sets of calculations and drawings with pertinent erection instructions for the whole roof construction as presented by the Truss System Engineer must be submitted to the Department for consideration and permission to proceed.

This in no way absolves the Contractor of his responsibilities.

Any modifications to design or drawings are to be arranged directly between the Truss System Engineer and the Department. It will be the Contractor's responsibility to ensure that information is presented to the Department in good time and no claims will be entertained in respect of any delays resulting from the late approval of drawings, etc.

Any difference in cost between the roof system initially submitted by the Contractor and the finally accepted system to meet the original design requirements will be for the account of the Contractor.

The Truss System Engineer will be required to inspect the roof structure and certify on letter reference TR2 (attached at the end of this document) that the construction is in conformity with his design, and any costs in this respect must be included in rates for the truss system.

If, in the opinion of the Department, further visits are necessary due to errors or omissions on the part of the Contractor or the Truss System Engineer the costs of these inspections will be for the account of the Contractor.

Fabrication and Storage: — Fabrication shall not commence until written permission has been given by the Department. The prefabricated roof trusses shall be manufactured, supplied and delivered to site by an approved manufacturer with all members accurately mitre cut, close butted and rigidly fixed together by approved galvanized metal spike connectors applied simultaneously to both sides of every joint by use of a mechanical press in accordance with SANS Code of Practice 0163.

Permissible deviations in fabrication of trusses are to be as specified in SANS Code of Practice 0155.

The following will not be permitted at joints: —

- b) knots, splits or finger joints
- c) varying member thicknesses
- d) plates not fully pressed into timber
- e) gaps between members exceeding 1.5mm average over the width of the mitred members.

Stress grade marks must be clearly visible on all members.

Relevant dimensions must be checked on site before fabrication. Trusses must be stored off the ground and under cover both at the factory and on site.



Erection and Bracing: — Unless otherwise instructed, erection must be carried out as described in "The Erection and Bracing of Timber Roof Trusses" published by the Truss Plate Association of South Africa and the National Timber Research Institute - CSIR.

Where the overall lengths of trusses exceed 13 m, complete braced bays are to be assembled on level ground and lifted into position suspended at maximum 3m intervals from a spreader bar. Alternatively, braced bays may be assembled in position on a minimum of two lines of temporary intermediate supports below node joints. Temporary supports must be removed before roof covering is placed.

The erector must be suitably qualified and must satisfy the Department that he can meet the specification.

Where the roof incorporates a hipped end, the construction is to commence with the hip, otherwise erection is to be commenced with a fully braced bay.

Temporary bracing must be installed as erection proceeds in accordance with the accepted design.

The Contractor must notify the Department in sufficient time in order that an inspection may be made before the roof covering is placed.

The trusses will be subject to the following tolerances: —

- a) maximum out of straight length/400
- b) maximum out of vertical at any point—height/200.

Rates: — The Contractor is to allow in his rates for the roof trusses for the design, manufacture, supply, hoisting and fixing of the roof trusses and permanent bracing, any necessary temporary bracing, and for the costs of all inspections by the Truss System Engineer.

Purlins or battens for roof coverings have been measured elsewhere. Rates for roof trusses are also to include for the exposed rafters at eaves overhangs to be wrot all round and trimmed and splay cut as required.

INSULATION, WATERPROOFING AND DUST PROOFING MATERIAL FOR ROOFS: — shall be of an approved aluminium foil faced both sides laminated Kraft Paper and synthetic reinforced material fixed in accordance with the manufacturer's instructions, lapped 150mm at all edge, unless otherwise specified.

GYPSUM PLASTERBOARD: — is to be in accordance with SANS Specification 266.

GYPSUM COVED CORNICES: — are to be in accordance with SANS Specification 622.

FIBRE CEMENT SHEETS: — are to be in accordance with SANS Specification 685.

FIBRE CEMENT CELLULOSE SHEETS: — are to be in accordance with SANS Specification 803.

HARDBOARD: — is to be in accordance with SANS Specification 540. Tempered and untempered hardboard is to be conditioned in accordance with the manufacturer's instructions before fixing in position.

VENEERS: — All decorative face veneers are to be selected kiln dried of best quality of the respective timbers, free from knots, cracks, patchwork, sapwood and other defects and bonded under heat and hydraulic pressure with water-resistant synthetic resin adhesive.

Commercial veneers are to be selected rotary cut hardwood veneers and otherwise as



described above.

PLYWOOD: — is to be long grain three or five-ply type manufactured with hardwood veneers with selected face veneers as described, bonded under heat and hydraulic pressure with water-resistant synthetic resin adhesive and sanded to a smooth finish.

CHIPBOARD: — All joinery fixtures shall be manufactured from 18mm Moisture resistant V313 Melamine Faced Chipboard (Particle Board) only with 32mm worktop as specified.

BATTEN BOARDING: — is to be long grain three-ply boarding manufactured with kilndried South African Meranti softwood core formed of laminations not exceeding 45mm wide and faced on both sides with selected veneers as described, bonded under heat and hydraulic pressure with water-resistant synthetic resin adhesive and sanded to a smooth finish.

DECORATIVE LAMINATE LININGS: — are to be 1.2mm thick approved general purpose quality high pressure decorative melamine laminate sheeting with satin finish and of selected colours and patterns, and rates are to include for all square cutting and waste and square notching, close cut and mitred external angle intersections where required and for bonding to the timber backings with an approved adhesive in accordance with the manufacturer's instructions.

The linings are to be cut out of single sheets in obviate joints but where joints are unavoidable, the sheets are to be butted to form a tight inconspicuous joint.

NAILS AND SCREWS: — Mild steel nails are to be in accordance with SANS Specification 820. Mild steel and brass screws are to be round headed, countersunk, etc. as appropriate and are to be in accordance with SANS Specification 1171. Nails and screws shall be of the size, length and type appropriate to their respective uses.

PLUGS, ETC.: — Where items of woodwork are described as "plugged", these may be nailed to timber plugs or slips built into the structure, and where described as "plugged and screwed" these may be screwed to timber or approved patent fixing plugs.

SHOT FIXING: — Where items of woodwork are described as "shot fixed" these are to be fixed with an approved cartridge-assisted tool, and rates are to include for all nails, spikes, blanks, washers, cartridges, accessories, etc.

CARPENTRY: — Timbers are to be the best of their respective kinds, free from sap, shakes, large, loose or dead knots, wavy edges and other defects and thoroughly seasoned. Wrot surfaces are to be finished clean, smooth and free from tool marks.

Timbers shall be in as long lengths as possible.

Rates for sawn and wrot structural timbers are to include for notching, splay and birds mouth cutting, housing, halving, scarfing, cutting timbers to the required lengths, spiking and clinching and or hoisting and fixing timber in position.

CEILINGS: — are to be of the types described, fixed to timber brandering, bearers etc. as described and with panels set out so as to give even width panels not less than half a sheet wide at edges. Brandering shall be spaced at not more than 400mm c/c and fixed at right angles to sheets.

FLUSH PLASTERED CEILINGS: — are to be formed of gypsum plaster board of the thickness stated, generally in 1200mm widths and long lengths, fixed grey side down to timber brandering, bearers, etc. as described, with butted joints between the boards covered with 65mm wide strips of galvanized wire scrim fixed along both edges, including all square notches and square cutting and waste, and the ceiling finished with two coats of approved retarded hemi hydrate gypsum plaster applied in accordance with the manufacturer's instructions to a finished thickness of not less than 6mm, including pressing into scrim over joints and finished to a smooth polished surface.



TRAP DOORS: 900 x 600 Prefabricated hinged trap door.

SUSPENDED CEILINGS BOARDS: — are to be of the types described or as specified – normally 6mm x 600mm x 1200mm embossed fibre cement boards - and inclusive of their component parts must be of sufficient strength to perform the function for which they are to be used, manufactured from best quality materials and conform to the requirements of the Fire Master. The exposed surfaces of all ceiling panels and supporting members are to be uniform in colour and free from surface blemishes.

Hangers are to be galvanized and are to be at maximum 1, 2mtr centres to meet the requirements of the specification, each with one end fixed to the suspension grid main bearers and the other end fitted with suitable galvanized fixing straps to the roof structure. Fixing points must be agreed to by the Department before any power shot fixings are made. Hangers must not be suspended from air-conditioning ducts.

Hangers to be provided at all four corners of recessed light fittings.

Component parts and fixings other than aluminium must be non-corrosive and able to withstand atmospheric pollution. Surfaces of aluminium which are in contact with other materials when fixed, particularly ferrous metals, are to be suitably insulated to prevent electrolytic corrosion.

All work is to be executed by specialists in accordance with the manufacturer's instructions, and to the approval of the Department.

Rates for ceilings are to include for hangers, suspension systems, ceiling panels, for constructing the ceilings in a manner suitable for carrying air conditioning diffusers and light fittings in the positions required, for setting out the ceilings to layouts approved by the Department, for all non-standard size panels, for modifications to standard suspension systems as necessary to work around any air-conditioning ducts or pipes or light fittings, for all necessary square cutting and waste, notching and fitting around projections, columns, etc.

EXPOSED TEE-SYSTEM SUSPENDED CEILINGS: — are to be of the type described with main tees and cross tees spaced at the required centres to suit the sizes of panels used, with the cross tees fitted between and notched to form a flush fit with main tees unless otherwise described. All suspended ceilings to be fitted with shadow line trimming to perimeters.

Main and cross tees shall be holed as necessary and provided with timber wedges or steel clips to prevent ceiling panels from lifting.

CONCEALED TEE-SYSTEM SUSPENDED CEILINGS: — are to be of the type described with main and cross tee section bearers spaced at the required centres and all properly fitted together at intersections.

ALUMINIUM TRIMS TO CEILINGS: — are to be of extruded aluminium of 6063-TF or equivalent quality and temper, of the sections described. Anodised trims are to be of the colour stated.

Rates are to include for all cutting, fitting at intersections, mitres, etc. and rates for items described as fixed with screws are to include for countersunk drilling and fixing with approved countersunk stainless steel screws.

INSULATION MATERIAL FOR CEILINGS: — shall be 75mm thick resin bonded glass wool / mineral wool thermal insulation blanket complying with SANS Specification 1381 of the thickness specified, delivered to the site in unopened rolls in its original factory wrappings over solid gypsum boards or styrene of 25mm thickness as specified glued to suspended ceiling tiles.



DOORS: -

Flush Doors: - Semi-solid and solid laminated flush doors are to be of approved manufacture complying with SANS Specification 545.

The doors are to be finished on both sides with the facing veneers specified and concealed on both stiles unless otherwise specified, with hardwood edge strips and where doors are required to receive a transparent finish, the edge strips are to match the facing veneers.

Doors with rebated meeting stiles are to have edge strips to the meeting stiles not less than 19mm thick.

Each door or leaf of double door, described as hung to swing, is to be fitted with necessary hardwood reinforcing blocks for bottom shoe and top centre of spring hinge.

Unless otherwise specified, all flush doors are to be interior quality, but, where exterior doors are specified, the glue used must comply with Type WBP of SANS 2304.

FRAMED, LEDGED AND BRACED BATTEN DOORS, ETC.: — Doors described as filled in with V-jointed boarding are to be filled in flush on one side with tongued and grooved vertical boarding, V-jointed on one or both sides and of the thickness stated. The boarding is to be in narrow widths, closely cramped up, rebated on outer edge and housed to grooves in stiles and rails and twice brass countersunk screwed at each intersection.

Ledges and braces and inner edges of the abutting stiles and rails are to be chamfered to form a V-joint at junction with the boarding. Braces to fall from lock to hinge side.

ENTRANCES TO SECLUSION WARDS: - Entrances to seclusion ward buildings shall be fitted with remote controlled full height 'Man Trap' Security Cubicles with bell pushes fitted to both entry and exit sides and remote unlocking / release operation enabled from security booth.

Doors to Seclusion Rooms: - Doors to seclusion rooms are to be steel lined solid core units with 100mm x 100mm viewing panel, glazed with 40mm bullet proof glass in a steel frame. Steel lining for doors is to be epoxy laminated to doors and around edges. Internal steel lining to be primed and finished with approved epoxy paint. External face of doors to be finished in veneer as per DOH standard details. Doors to be hung to open inward on special 6mm galvanized steel door frames with lugs pre welded to frame to fit every third course of brickwork. The complete unit is to be hot dip galvanized and built into surrounding 230mm solid brick walls. No welding to be done on site.

NOTE: - Above Anti-Bandit Security doors are solely supplied by "Chubb" and "Bitcon Industries" as a complete unit with all fittings and ironmongery.

DOORS TO X-RAY UNITS

Entrance doors to X-Ray rooms shall be top hung sliding door size 1830 x 2032 x 40mm, complete with heavy duty sliding door track — 'Henderson' or other approved -, 2.2mm lead insert between panels and four door stoppers. Door is to overlap door opening 100mm each side when closed.

JOINERY: — All timbers shall be in as long lengths as possible. Lengths for joinery shall be single where possible and where joints are unavoidable, they shall be made as inconspicuous as possible.

Timber for grounds, firrings, blocks, plugs, etc. shall be sound and free from defects.

All joinery work is to include for work in connecting by mortise and tenon, dovetailing, housing, flush pinning, etc. as may be by required and for all screws, nails and glueing



together and for sinking flush all exposed screws unless otherwise specified.

Wrot surfaces and edges are to be steel scraped and sandpapered before and if necessary, after fixing.

Edges are to be arras rounded unless specified to be angle rounded.

"Arras rounded" denotes that the sharp edges are slightly rounded off and that no mitring is required.

"Angle rounded" denotes rounded from 3mm to 10mm radius and is to include for housed and mitred joints.

Hardwood doors, frames, jamb and soffit linings, etc. are to be treated on all surfaces with one coat of approved sealer before building in, etc. and rates for these items must include for this. Batten doors with tongued and grooved battens are to have the tongues and grooves well sealed before assembling. The sealer used shall be compatible with the finishing coats to be applied.

Horns of door frames are to be checked and splayed back where frames are fixed projecting or flush with surface and built in.

Where doors, fanlights or sashes are described as hung to butts on steel or aluminium frames, rates are to include for supplying necessary steel, brass or stainless steel screws.

Panel work is to be secured to the grounds, etc. with screws concealed behind the mouldings or by sinking the screws and pelleting as directed.

Joinery is to be framed up, but not glued or wedged, immediately the order is given to commence work. Wherever possible, joinery shall not be placed or fabricated in position until the plaster has dried out. Reasonable tolerance shall be provided at all connections between the joinery and building carcass so that any irregularities, settlements or other movements shall be adequately compensated. All joinery shall be accurately scribed to fit the contour of any irregular surface. Should the joints of any joinery open or give, such defective work is to be taken down, refitted and redecorated or replaced by new joinery at the Contractor's expense.

Only brass screws may be used for hardwood joinery.

The Contractor is to allow for cross-tonguing all solid wood sections unobtainable in single widths.

No joinery is to be primed until it has been inspected and approved by the Department.

All joinery liable to injury must be protected to the satisfaction of the Department. Rates must include for this temporary protection.

Rates for timber frames, mullions, transoms, linings, standards, rails, fascias, cornices, skirtings, beads, picture rails, etc. are to include for mitres, etc.

Rates for all items of timber-are to include for fixing and planting on as may be required with necessary panel pins or nails.

PARTITIONS:

These are to be of an approved system of standard construction, with an average sound rating of not less than 30 decibels taken over the whole face area.

Framing is to be natural finish anodised aluminium comprising posts at 1200mm centres unless otherwise described, with transom rails where specified, fitted between the posts, a



rail against ceiling and an aluminium standard skirting on each side at base, all neatly and securely fixed together.

Provision is to be made at the base of the partitions and in the ceiling rails and posts for electrical wiring, which will be installed under the electrical sub-contract, and the ceiling tails and end posts are to be fitted with continuous removable access plates.

Solid panelling is to be approved solid chip core panels of the thickness specified faced on both sides as described in the items.

Glazed panels are to be glazed as required, complete with all necessary natural finish anodised aluminium glazing beads and vinyl glazing strips.

Louver panels where specified are to be approved natural finish anodised aluminium adjustable louver sets each comprising head and sill weather bars and two jamb strips each fitted with louver brackets with spring loaded clips for and fitted with and including louvers as required and complete with tilt bars and operating lever handles. Where the openings are not the correct size to suit a full number of standard width louver blades, an alternate head weather bar must be provided to suit a fixed louver blade of the required width. The louver sets are to be fitted with the jamb strips positioned horizontally so that the louvers will be fixed vertically.

Partitions are to be in 1200mm modules, unless otherwise specified, except at ends where the odd lengths are to be made up by a narrow width at one end of the partition.

Ends of partitions against walls, window frames, etc. and the top edge of partitions against ceilings are to be fitted on both sides of partition with approved vinyl scribing sections fitted between the structure and the end post or top rail of the partition.

Plain openings are to have aluminium frames similar to door openings neatly fitted into the framing.

Doors are to be solid laminated flush doors complying with SANS Specification 545. The doors are to be finished on both sides with veneer as described in the items and concealed on both stiles with matching hardwood edge strips.

Where doors are described as having observation openings, these openings are to be of the sizes stated, glazed as specified with all edges bedded in approved neoprene gaskets and fixed with 10 x 25mm wrot matching hardwood rebated glazing beads mitred round and bradded to both sides.

Rates for doors are to include for all necessary additional aluminium framing to form door openings, and for hanging the doors on and including one and a half pairs of 102mm satin chrome finish brass hinges to each door.

All locks to doors in demountable partitions are to be supplied with two keys, and are to be controlled by the same master key as the mortise locks used elsewhere in the Contract when specified.

Unless otherwise specified all veneered solid panelling and doors are to be finished as follows: —

Prepare, stop with tinted stopping, apply an approved stain as necessary to achieve uniform colour appearance, and three coats of approved clear matt polyurethane finish including burnishing with steel wool between coats.

Rates for demountable partitions are to include for supplying, assembling, erecting, finishing, glazing and fixing complete between finished surfaces of concrete floors, plastered walls and ceilings, and all in accordance with the manufacturer's instructions.

DEMOUNTABLE PARTITIONS 50MM (NATURAL ANODISED).

Extruded Aluminium Sections

Supply and fit demountable "Kappa" partition system comprising anodized aluminium U-Channel fitted to suspended ceilings. Vertical split-post (mullion) to be fitted between floor and ceiling U-Channel at 1225mm c/c with angle brackets. Once framing is fixed, fit panels into place and secure with clip-on cover plates.

All aluminium sections may be anodized or powder coated in a variety of colours.

Panels

41mm thick semi solid core panels 2032 x 1200mm. The panels are made up of two outer skins of 3.2mm hardboard cladding. Lower panels to be provided with a 150mm wide solid mid-rail 850mm from the base of the panel to the centre of the mid-rail built in as part of the construction. The panels to be prepared before applying the final finish as specified.

Construction

Right angled corners to be formed with natural anodized aluminium radiused corner post fitted from floor to ceiling. Floor fixing to be angle brackets and ceiling fixing to be hidden block. The ceiling U-Channel butts up against radiused corner post.

Door Frames

Door frames to be natural anodized aluminium pre-fitted with woolpile gaskets, clipped into H-Profile at head and clipped into combination split post and cover plate at styles. The rebate on the door frame caters for standard doors of a thickness between 40mm and 44mm.

Glazing

Glazed panes to be framed with H-Profile fitted horizontally at top and bottom, butted against side of split-post and clip on cover plate combination and fixed with angle brackets. Glazing sections pre-fitted with woolpile gaskets and set into H-profiles and into post / cover plate combinations to form a neat glazing opening. Glazing beads pre-fitted with woolpile gaskets and then clipped into glazing section.

Termination

Openings for louver frames, sliding doors and windows, serving hatches and partition ends are to be lined with the aluminium termination section.

Skirtings

76mm high aluminium skirting to be glued to panels.

DRYWALL PARTITIONS:

Studs

50mm x 33.5mm x 0.5mm thick drywall galvanised steel studs are used. The studs to receive aluminium extrusions clipped onto both sides of the stud. Framing to be securely fixed to walls, floor and ceilings where necessary. Stud connectors to be used to join horizontal studs to vertical studs.

Floor Track

52mm x 25mm x0.6mm galvanised sheet steel track to be used.

Panels

12,7mm thick tapered edged gypsum plasterboard panels used and decorated in situ with panels secured to either side of framework.

Patient care areas to be 12mm Supa Wood panels in framework as specified.

Construction



Internal walls are constructed by fixing drywall studs to floor track @ 600mm c/c. Wall and ceiling junctions are formed by fixing 84mm x 19mm aluminium ceiling and wall channel to wall or ceiling. The floor track is then fixed into this; alternatively, these components may be fixed simultaneously. The studs are then fixed to floor.

The partitions, unless otherwise described are to be 75mm thick and covered both sides with 12,7mm thick tapered edged gypsum board in 1200mm widths to height specified.

The gypsum boards are screwed @ +/- 300mm c/c at all intersections to the floor and head wall tracks and vertical studs.

Using self-drilling, self-tapping, rust proofed countersunk screws, with screw heads and joints between boards and between abutting edges of boards flushed up with an approved jointing material.

Exposed Aluminium Framing

Door frames, glazing termination and ceiling and wall channels to be natural anodised aluminium. 25 x 25 x 1.5 aluminium angle stuck to external corners of partitioning. 80mm high aluminium skirting glued in position.

Glazing

Aluminium glazing section is clipped onto the flanged end of the stud around the glazing perimeter. The glazing section has a recess to accept a rectangular clip-in glazing bead which enables 3mm-8mm thick glass to be received in the system. The glass is retained with various sizes of PVC glazing gasket.

Termination

Openings for louver frames, sliding doors and windows, serving hatches and partition ends are to be lined with the aluminium termination section.

Skirting

The system is designed to accept recessed base, female, 60mm high aluminium skirting.

Sound Insulation

75mm Fibreglass Cavity Bat with a 35g glass tissue or 75mm Isotherm "Acoustisorb" mineral wool blanket is to be installed between studding before fixing final outer panel.

All work is to be executed by a firm specialising in this type of work and all to the approval of the Department.

FLOOR COVERINGS, PLASTIC LININGS, ETC. 8.

FLOOR SHEETING: — are to be of the composition, type, size and thickness specified with colour, pattern, graining, etc, consistent throughout, all to the approval of the Department.

Thermoplastic floor tiles: — are not to be used.

Fully flexible vinyl floor sheeting: — are to comply with SANS Specification 786 and is to be 2.5 mm nominal thickness.

Recessed entrance mats with brass frame at main entrance into a health facility as "Belgotex" Grimbuster or other approved. This to be positioned outside before entering. In patient care area's, no perforations to floor covering is to be made. Eg door stops, door barrel bolt floor keeps etc.

Where the specified sizes and/or thicknesses of floor sheeting differ from those in the SANS Specifications, such items of floor sheeting shall comply in all other respects with the relevant SANS Specifications.

SKIRTINGS, STAIR NOSINGS, EDGING STRIPS, ETC .: -are to be of the types and sizes specified and are to be of approved manufacture

CARPET TILES AND SHEETING: — are to be of the types specified and of approved colours and patterns all to approval of the Department.



Vinyl Floor covering laying procedure and polishing.

Site conditions required before the layer commences an installing of a Resilient Floor covering. Some of these conditions may appear obvious, but they are not always complied with. If any of the following recommendations are ignored, it is likely that a number of problems will arise during or after installation of the flooring.

- 1. All building materials and equipment, e.g. sand, scaffolding, tools, etc. should be removed. (Do not allow heaps of sand, concrete, etc., to remain on the surface of the subfloor since moisture transfer to the sub-floor takes place).
- 2. All resilient flooring materials require a smooth, hard, clean and level surface, not only for appearance but also for achieving a satisfactory adhesive bond and long-term durability. The Specifier and the Main Contractor shall ensure that the sub-floor is acceptable to receive the resilient flooring specified in respect of levelness, smoothness, soundness and cleanness. (The SANS Code of Practice 070/1991 as amended 1993 Section 9.3 details the requirements in this regard).

The flooring contractor shall ensure that the sub-floor is sufficiently dry prior to the installation of the flooring material. The floor should be tested by means of a Hygrometer or a Tramex. (Of the instruments available for determining moisture levels in sub-floors, the most practical and accurate is the hygrometer).

SHEETING

Ensure that the following steps are followed during the installation:

- 1. Trim off factory leading edge before laying sheeting.
- 2. Align the sheet in position that there is an opening no bigger than 1mm between adjacent sheets. For the best results, the width of a credit card is an acceptable measure.
- 3. Apply adhesive according to the manufacturers' specifications.
- 4. Roll the floor during and after installation with a 68kg roller to maximize the adhesion between the sheeting and the adhesive.
- 5. Complete the welding 24 hours after the installation. Groove the joins open with a suitable hand or electric groover to a width of not wider than 3mm and not deeper than 1.5mm. Weld the joins with a hot air welding gun with temperature settings of between 4-6 temperature setting and use a speed nozzle that will not burn the material or damage the coating. Use a sharp spatula and guide plate and remove the excess welding in two stages.
- 6. All vinyl sheeting needs to be stripped and sealed 72 hours after installation. Please ensure you use a good quality product.

2.1 HYGROMETER

When a hygrometer is positioned on a sub-floor surface, the reading of the relative humidity of the entrapped air space is obtained.

- A hygrometer reading of less than 70% indicates that the sub-floor is sufficiently dry for flooring to be laid upon it.
- If the hygrometer indicates a final reading of more than 70% when the initial reading of the atmosphere was less than 70% then the sub-floor is unacceptably damp and must be allowed to dry out before any flooring is installed.
- If the hygrometer indicates a final reading of more than 70% when the initial reading of the atmospheric humidity was also greater than 70%, as can occur in coastal areas, then the following applied:
- 1. If the final reading is significantly higher than the initial reading, then the sub-floor must be considered to be unacceptably damp.
- 2. If the final reading is similar to, or less than the initial reading, then the moisture content of both the atmosphere and the sub-floor are similar.



2.2 TRAMEX CONCRETE MOISTURE ENCOUNTER (C.M.E.)

Any reading on the C.M.E. of 60% or less indicates acceptable moisture content for the installation of any vinyl floor covering.

3. Floor Preparation - New and Existing (old) Screeds

3.1 Use of screed smoothing compounds should be avoided except for making minor repairs, however should a full skim be required, then the most common method in both instances is the use of a smoothing compound e.g. Pavelite in combination with Pavelite Bonding Liquid, mixed to the correct ratio and consistency. Only recommended products, mixed strictly in accordance with manufacturers instruction should be used. Do not use smoothing compound on power floated finishes. It is recommended that in new structures the screeding should be as specified by "Tal" using "Screedmaster", the pumped method. A badly undulating floor may require grinding by mechanical means to improve the overall levelness. Although smoothing compounds such as Pavelite will improve the sub-floor it will not achieve perfection.

3.2 In cases where old vinyl floor coverings have been uplifted, leaving a bitumen adhesive residue, it is recommended that a strict procedure relating to the "Preparation of Sub Floors

with Bitumen Residue", be complied with.

(This method may not constitute good flooring practice, but has proved to be successful on many occasions. No guarantee is however given or implied).

4. Construction joints (saw cuts) and Expansion Joints

4.1Construction joints (saw cuts) in the sub-floor should be cleaned out, and the sides of the saw cut be painted with Pavelite Bonding Liquid and allowed to dry. The joint should then be filled with a mixture of Pavelite and Pavelite Bonding Liquid. It is advisable to slightly overfill the joints, which when dry should be rubbed down with a carborundum stone.

4.2 Expansion joints should be filled with a suitable Sealant to prevent the ingress of dirt. It is bad flooring practice to lay flooring over such a joint. The flooring should stop at the edge of the joint and cover strips placed over the joint itself. Expansion joints and cover strips should be discussed and designed by a structural engineer.

5 Correct setting out is critical, and consideration should be given to the squareness of the area. It is safest to set out from the longest outside wall.

5.1. The recommended notching for a trowel to spread adhesive is a V notch of 1,5 x 1,5 x 1,5mm at 4,00mm centres. Consideration should however be given to the porosity of the sub-floor. Ensure the use of the recommended adhesive with the appropriate flooring. Do not spread the adhesive over a larger area than can be covered within the working/open time of the adhesive.

5.2 All installations must be rolled with a 68kg three sectional articulated metal floor roller on completion, within the working time of the adhesive.

5.3 Welding of sheeting is to be done only after 24 hrs after installation.

5.3, a. Trimming

While the welding rod is still warm, trim off most of the top half using a sharp spatula and spatula guide which fits over the welding rod. Carry out the final trimming using the spatula knife only, when the welding rod has cooled.

5.3.b Glazing

The trimmed welding rod will tend to soil more rapidly than the sheeting. It is therefore Important to glaze the surface of the trimmed welding rod.

- 6. After installation the flooring should be adequately protected, preventing damage caused by other trades working on the site.
- 7. The completed floor should not be washed or polished for a period of 72 hours after the installation in order to allow the adhesive to cure. This period will vary from one adhesive to another.
- 7.1 The vinyl floor covering must be cleaned with an approved water based floor Stripper, in order to achieve an acceptable standard of cleanliness for sealing. Avoid excessive use of water at all times



7.2 Foreign matter such as paint stains, tar, etc. which may not respond to the process must be removed by other means.

7.3 Three coats of a Water Based Emulsion floor dressing, shall then be applied on completely dry surface in accordance with the manufacturer's instructions, allowing one hour drying time between the first and second application of each dressing coat.

RATES: —for all floor coverings are to include for laying as described, for cleaning down backing surfaces before laying and or all square and raking cutting and waste and fitting, fair cutting at edges where no skirting occurs, protecting from injury, and for cleaning down, etc. as described, at completion.

Rates for all wall linings are to include for laying as described, cleaning down backing surfaces before laying, sizing backing surfaces if necessary to ensure proper adhesion, all square and raking cutting and waste and fitting, fair cutting at exposed edges, bending at angles and for all narrow widths and protecting from injury and cleaning down, etc. as described, at completion. Wall linings in widths not exceeding 300mm to returns, reveals and the like have not been measured separately, but have been included in the area of the general items of wall linings and rates must include or this.

Rates for skirting, stair nosing, edging strips, etc. is to include for fixing as described, cutting to lengths and fitting at intersections, mitres, ends, etc. and for cleaning down at completion.

9. IRONMONGERY

Ironmongery is to be to the approval of the Department and rates are to include for fixing screws of corresponding metal and finish and for oiling and easing as required at completion.

Where catalogue references are given, the articles are to be of the brand specified or other approved.

No two-lever mortise locks are to be used.

Mortise locks, cylinder locks, cupboard locks, etc. are to differ so that no key will pass a second lock, unless otherwise specified. Where mortise locks, cylinders, locks, etc. are specified to be "en-suite" they are to be made "en-suite" in the specified number of "suites". The "suites" are to be controlled by differing sub-master keys with a grand master key controlling all "suites", and no sub-master is to pass any lock of another "suite".

All locks are to be fitted with two keys and the locks are to be stamped with consecutive numbers and the keys to each are to be stamped to correspond with the lock.

Items of ironmongery specified as chrome plated or satin chrome finish are, unless otherwise specified, to be chromium plated or satin chrome finish on solid brass.

Items of ironmongery specified aluminium are to be natural anodised.

Where items of ironmongery are specified as fixed to pressed steel door frames, the Contractor is to ensure that the suppliers of the steel frames prepare the frames for all keeps and do all mortising and drilling required and receive all information necessary regarding ironmongery. Preparation of steel doorframes for ironmongery has been measured elsewhere.

Where tests of ironmongery are described as "plugged and screwed" these are to be screwed to patent fixing plugs of approved manufacture, and this shall include for plugging and screwing to brickwork or concrete.



Key tags are to be 40mm diameter x 3mm thick plaster of approved colour, engraved on face with the required number of letters and numerals finished in an approved colour, and the tag is to be holed for and fitted with a steel split ring and fixed to key.

Engraved plastic door signs and numeral plates are to be of 5mm thick clear plastic with square polished edges all round with an approved coloured background and sans-serif letters and numerals as described in the items, reverse engraved in the plate with splayed sides and flat reading face and finished in an approved contrasting colour. Each sign is to be twice drilled for and fixed to softwood or hardwood, unless otherwise described, with chromium plated round beaded brass screws. Unless otherwise described, the signs are to be 50mm high with 30mm high, engraved letters or numerals and are to allow a minimum margin of 25mm at both ends. All signs are to be equal to sample to be submitted to and approved by the Department.

Pictorial plastic signs are to be of 5mm thick clear plastic of the sizes stated in the items with square polished edges all round and with the silhouette described in the items applied to the back of the plate by means of the silk screen process in an approved colour and the whole back of the plate finished in an approved contrasting colour. Each sign is to be four times drilled and fixed to softwood or hardwood, unless otherwise described, with chromium plated round-headed brass screws. All signs are to be equal to sample to be submitted to and approved by the Department.

10. STRUCTURAL STEEL WORK

GENERALLY: — The fabrication, assembly and erection of structural steelwork is to be executed in accordance with SANS Specification 1200H — Structural Steelwork (a copy of which the Contractor will be required to keep on site so that it can be referred to at all times during the Contract) with the following amplifications and amendments: —

INTERPRETATIONS: — Clauses 2.1 and 2.2 refer. This preamble, together with any other supplementary preambles appearing in these Bills of Quantities shall be deemed the project specification and are the "Portion 2" referred to in Clause 2.2.

DEFINITIONS: — Clause 2.3 of SANS Specification 1200H refers. All references to the Engineer shall be deemed to mean the Department.

SUB-CONTRACTORS: —The Contractor shall either (a) have adequate satisfactory and approved experience in this type of work or (b) employ an approved specialist structural steelwork Sub-Contractor. The Contractor, in the case of (a), or the specialist Sub-Contractor, in the case of (b), shall employ at all stages of the Works both on and off site a competent Supervisor experienced in the work.

MATERIALS: — Unless otherwise shown on the drawings or hereunder, all rolled sections shall be hot rolled mild steel, and all materials shall comply with one of the following: —

- a) Weldable Structural Steels to SANS 4360:
- b) Hollow sections to SANS 4848 Part 2 and SANS 6323.
- c) Cold rolled sections to SANS 2994.
- d) Black bolts and nuts to SANS 135.
- e) Precision bolts and nuts to SANS 136.
- f) High-strength friction-grip bolts and nuts to SANS 1282.
- g) Flat and tapered washers to SANS 1149.
- h) Electrodes for welding to SANS 455.

SHOP DETAIL DRAWINGS: — The Contractor shall prepare shop detail drawings, in conformity with the details shown on the structural steelwork drawings and to show all information necessary for complete fabrication, assembly, ejection and painting. In the preparation of the shop detail drawings the Contractor is to comply with the requirements of SANS Code of Practice 0162.



The cost of preparing all necessary shop detail drawings and copies thereof is to be allowed for by the Contractor in his rates.

The Contractor shall submit two copies of his shop detail drawings to the Department for approval at least 10 days before fabrication of the member concerned is due to commence. Such approval does not imply that a complete and comprehensive check of the detail drawings has been carried out, and the Contractor shall remain responsible for ensuring that the steelwork is correctly fabricated, assembled, erected and painted.

SUBSTITUTION OF SIZES, ETC.: — No substitution of sizes or joints additional to those shown on the drawings shall be made without the prior approval of the Department. Except in cases of proven non-availability of materials specified, any additional costs involved due to substitution shall be for the Contractor's account.

FIXINGS: — The positions and manner of fixing the hangers for suspended ceiling airconditioning ducts, pipe installations, etc. to the structural steelwork are to be approved by the Department before work on such installations commences.

FABRICATION, ASSEMBLY AND ERECTION

Welding: — shall be carried out in accordance with SANS Code of Practice 044 and the relevant recommendations of SANS Code of Practice 0162 and SANS 5135, and in any case of conflict, the SANS Codes of Practice shall be deemed as binding.

All welders employed on the Works shall be currently classified at least as grade 2 welders as defined by SANS Code of Practice 044. Should the Department so request, proof of the classification shall be produced.

Unless otherwise specified all welds are to be continuous fillet welds of 6mm leg length or not less than the thinnest plate or section being welded.

Handling, Storage and Erection: — of members is to be undertaken in such a manner to prevent overstress or damage. Should overstress or damage occur, the Department shall be informed and his instructions sought.

Storage shall be arranged such that damage to applied finishes is prevented.

All plant and equipment used in the erection of structural steelwork shall be adequate in every respect. The Contractor shall allow in his rates for all necessary temporary bracing, and for maintaining and finally removing such temporary bracing.

Fixing of Bolts, etc.: — Unless approved by the Department, no pre-drilled fixings for bolts, etc. will be permitted through hollow section members. Any hollow section member that has been drilled or punctured in any way shall be considered condemned and must be replaced to the satisfaction of the Department.

INSPECTION AND TESTING

Facility for Inspection: — The Contractor shall afford to the Department all reasonable access to inspect the steelwork at any stage of its fabrication, and shall give due notice before delivery of steelwork to the site to allow inspection and tests to be conducted if so required by the Department.

Cost of Tests: — The cost of all tests required by the Department shall be borne by the Administration, except that the costs of the following tests shall be borne by the Contractor:

(a) Testing of welders and equipment

(b) Such tests (including load tests) as may be necessary by failure on the part of the Contractor to meet the requirements of the specification.

Procedure in the Event of Failure: — In the event of a failure of a test, the Contractor shall



either replace the defective item or prove its sufficiency by means of a load test carried out in accordance with Appendix B of Chapter 6 of the South African Standard Building Regulations. If so required by the Department the Contractor shall also demonstrate by means of tests at his own cost that all like members meet the requirements of the Specification.

PRIMING OF STRUCTURAL STEELWORK

General

(a) Painting conditions.

No painting shall be undertaken when one or more of the following conditions exist: —

(i) The atmospheric or steel temperature is below 10°C,

- (ii) The atmospheric or steel temperature is expected to fall below 7° C before the paint is
- (iii)The atmospheric or steel temperature is high enough to cause damage to the paint film,

(iv) In fog or mist,

(v) The relative humidity is greater than 90 %,

(vi) Surfaces are or will be wet or damp from rain or other causes,

(vii) Surfaces are contaminated by dirt, dust, grease, oil or other matter detrimental to painting.

(viii) Wind will deposit dust onto un-dried surfaces.

(b) Extent of shop painting.

All surfaces shall be primed as described in the shop except: —

(i) Those to be encased in concrete which are to be left as prepared metal; unless otherwise specified

(ii) Contact surfaces of high strength friction-grip bolt connections which are to be left as

prepared metal

(iii) Edges or faces yet to be welded which are to be left as prepared metal over sufficient width from the weld to avoid contamination of the weld or damage to the paint by the effect of welding.

(c) Paint identification, storage and preparation.

All paint shall be supplied in unopened original containers showing the manufacturer's name and trademark date of manufacture and the relevant SANS or other specification number.

No paint shall be used past its maximum life span but otherwise oldest paint shall be used first. Containers shall not be opened until required and opened containers shall be used before unopened containers

Before use, paint shall be thoroughly stirred and prepared in accordance with manufacturer's instructions.

(d) Thinning.

No paint shall be thinned except strictly in accordance with manufacturer's instructions.

(e) Dry film thickness.

Where not specifically later stated this shall be in accordance with manufacturer's instructions for spreading rates. A tolerance of approximately 10% of that thickness will be allowed.

(f) Touching-up surfaces.

Surfaces shall be protected against damage, but should this occur, then the paint shall be rubbed down over the damaged and surrounding area to a sound surface and then restored by re-applying the removed coat properly feathered in with the existing.

Upon completion of site connections, these connections shall be stripe painted with the specified primer before any further painting is carried out.



Class P1 Preparation and Priming Coat: — Unless otherwise specified, rates for structural steel-work are to include for Class P1 Preparation and Priming Coat as follows:-

- (i) Surfaces are to be cleaned in accordance with SANS Code of Practice 064 to remove all rust, scale, grease, oil, etc. endeavouring to bring the surface to a bright metallic condition, and painted, unless otherwise specified, with one coat of red -oxide zinc chromate primer in accordance with SANS Specification 909 prior to despatch from the works.
- (ii) Upon delivery to the site and again after erection any bared or damaged surfaces are to be made good with similar primer.

The Contractor is advised that the finishing coats of paint to be executed after the erection of the structural steelwork have been measured elsewhere.

Class P2 Preparation and Priming Coat: — Where specified, rates for structural steelwork are to include for Class P2 Preparation and Priming Coat as follows: —

- (i) Surfaces shall be thoroughly cleaned by sandblasting to Swedish Standard SIS 055900 standard Sa 2½ to give minimum peak to valley profile of 50 micrometer when measured by SANS Draft Test Method No. 772.
- (ii) Surfaces shall be blown thoroughly clean with compressed air and within four hours of sandblasting, one coat of "Plascon SN 162 Ironguard-4-Zinc" or other approved primer of minimum dry film thickness of 75 micrometer shall be applied by pressure pot spray system in accordance with the manufacturer's instructions in the shop.
- (iii) Upon delivery to the site and again after erection, any bared or damaged surfaces are to be made good with similar primer.

The Contractor is advised that the finishing coats comprising one intermediate coat and one finishing coat of chlorinated rubber paint to be executed after the erection of the structural steelwork have been measured elsewhere.

Class P3 Preparation and Priming Coat: — Where specified, rates for structural steelwork are to include for Class P3 Preparation and Priming Coat as follows: —

- (i) Surfaces shall be thoroughly cleaned by sandblasting to Swedish Standard SIS 055900 standard Sa 2½ to give maximum peak to valley profile of 50 micrometer when measured by SANS Draft Test Method No. 772.
- (ii) Surfaces shall be blown thoroughly clean with compressed air and within four hours of sandblasting, one priming coat of "Epidermix 352" or other approved epoxy coal tar of minimum dry film thickness of 75 micrometer shall be applied in the shop.
- (iii) Upon delivery to the site and again after erection, any bared or damaged surfaces are to be made good with similar primer.

The Contractor is advised that the finishing coat comprising a further coat of epoxy coal tar to be executed after the erection of the structural steelwork has been measured elsewhere.

MEASUREMENT AND PAYMENT: — The provisions and Clause 8 will **NOT** apply and the system of measurement which is adopted in these Bills of Quantities is the only system of measurement which will be recognised in this Contract.

RATES FOR STRUCTURAL STEELWORK: — Rates for structural steelwork are to include for all necessary cutting to lengths, splay cut ends, shaping, holing, tapping, threading, forging, turning, assembling, welding, and fixing in position.



METALWORK 11.

PROPRIETARY MATERIALS: — Where proprietary materials are specified, the materials used are to be of the type, specified or other approved by the Department.

RATES: — for all metalwork, unless otherwise stated, are to include for cutting to length, shaping, turning, threading, forging, fitting, assembling, riveting, welding, welded running joints, filing smooth, also for all screws and holes and hoisting and fixing in position. All screwed work is to have full threads.

WELDING AND BRAZING: — Where items are described as welded or brazed, rates must include neat welding or brazing by experienced workmen using a recognised process and for cleaning and filing or grinding off smooth, all to approval. All welding is to be continuous unless otherwise described.

SCREW FIXINGS: — Where items are described as tap screwed, grub screwed, set screwed, etc. rates must include for the necessary screws, for drilling all components and for tapping the components where necessary to receive such screws.

PIPE MEMBERS: — All galvanized mild steel pipe members are to be "medium" pipes complying with SANS 1387. Diameters of pipes, unless otherwise stated, are normal internal diameters.

PRIMING OF STEELWORK: — All items of fabricated mild steel except where described to be galvanized, are to be cleaned in accordance with SANS Code of Practice 064 to remove all scale, rust, grease, oil, etc. endeavouring to bring the surface to a bright metallic condition, and painted, unless otherwise specified, with one coat of red-oxide zinc chromate primer in accordance with SANS Specification 909 prior to despatch from the works.

GALVANISING OF STEELWORK: — All steel surfaces described to be galvanized are to be thoroughly sand, grit or steel shot blasted to white metal in accordance with SANS Code of Practice 064 and fluxed ready for galvanising, and the completed unit is to be hot dip galvanized after fabrication in accordance with SANS Specification 763 for general applications on the relative thicknesses of metal.

The zinc coating shall be continuous and of even thickness over all surfaces entirely free of bare spots, dull, rough patches, blisters and other imperfections and shall show no signs of peeling. Where site welding has to be done, the welds are to be properly cleaned down and cold galvanized to the approval of the Department.

If requested by the Department, the manufacturer shall carry out tests to prove that the requisite mass / thickness of zinc coating is applied and that it is of uniform thickness. The tests shall be made by attaching a test piece of mild steel, approximately 250 x 25 x 6mm, by means of wire, to an article being galvanized, and subjecting the test piece to the same cleaning, fluxing and galvanising treatment as the article being galvanized, and at completion, the test piece tested by a method approved by the South African Bureau of Standards, the cost of which will be borne by the Contractor.

CHROMIUM PLATING OF STEELWORK: — All items of fabricated mild steel described to be chromium plated are to be properly de-greased, cleaned and polished perfectly smooth before plating and all in accordance with SANS Specification 728. All items are to be first nickel-plated then chromium plated to provide a bright mirror finish and all plating is to be equal to sample to be submitted for the necessary approval by the Department.

PRESSED STEEL DOOR FRAMES: — shall be manufactured from mild steel sheet 1.60mm thick for single rebated frames and 1.20mm thick for double rebated frames. Rebates shall be suitable for 42mm thick doors and fanlights.

The sections are to be accurately bent to form the profiles. Corners are to be mitred and welded and reinforced at back with 1.60mm thick steel angle sections. Transoms for



fanlights are to be let into the jambs and welded. All welds are to be solid and cleaned off flush, leaving a perfect outside finish.

Each frame is to be fitted with one pair of sturdy angle or channel section tie bars at base, welded below the frame, and where required for additional strength, cross struts of the same section are to be welded between and at right angles to the main tie bars. Each frame is also to be fitted with one 'diagonal brace as temporary support, standard 230mm long corrugated adjustable building-in lugs at jambs, three rubber shock absorbers in rebate of lock jambs of frames for single doors and one rubber shock absorber, for each leaf in the rebate of the head or transom of frames for double doors.

All frames are to be primed on all surfaces with an approved red oxide zinc chromate priming coat in accordance with SANS Specification before leaving the manufacturer's works, unless specified to be hot dip galvanized, and rates are to include for touching up where necessary with similar primer after building in.

Where frames are specified to be galvanized they are to be hot dip galvanized after manufacture in accordance with the relevant provisions of SANS Specification 763 for general applications on the relative thicknesses of metal.

Frames, unless otherwise described, are to be fitted with one and a half pairs of 100mm five-knuckle loose pin steel hinges, unless otherwise specified for each door or each leaf of double door and with one pair of 75mm five-knuckle loose pin steel hinges for each fanlight. The three-knuckle leaf of each hinge is to be welded into the frame or transom.

Where frames are described to be fitted with brass butts, the frames are to be checked out and fitted, unless otherwise specified, with one and a half pairs of 100mm double bronze washered brass butts for each door or leaf of double door, unless otherwise described, as one pair of 75mm brass butts for each fanlight, with open leaf of each butt secured to the frame or transom by means of 6mm diameter countersunk headed brass set screws screwed to and including a 3mm thick steel backing plate of suitable size welded to frame or transom and drilled and tapped to receive the set screws.

Where frames are described to be fitted with aluminium hinges the frames are to be checked out for and fitted, unless otherwise specified, with one and a half pairs of 100mm five-knuckle aluminium hinges of 6082 alloy with nylon bushes for each door or leaf of double door, unless otherwise described, and one pair of similar hinges to each fanlight, with the three-knuckle leaf of each hinge secured to the frame or transom by means of 6mm diameter countersunk headed stainless steel set screws screwed to and including a 3mm thick steel backing plate of suitable size welded to frame or transom and drilled and tapped to receive the set screws.

Where frames are to be prepared for the top centres of floor spring hinges, a 6mm thick steel backing plate of suitable size is to be welded into the back of the frame and drilled and tapped to receive the fixing screws of the top centre.

The preparation of frames or all items of ironmongery, other than butts, has been measured separately and the rates against these items are to include for all drilling, mortising, tapping for screws, etc. required for the fixing of keeps, brackets, etc. of the items of ironmongery described. Preparation of frames for locks and latches is to include, in addition to the above, for recessing and fitting the frames with and including standard keeps and adjustable striking plates to suit the types of locks and latches used and with totally enclosed mortar guards 1, 15 metre high above finished floor.

Door and fanlight sizes are given to the nearest 10mm. The building in of frames has been measured separately.

STAINLESS STEEL DOOR FRAMES:- shall be manufactured from grade 304 stainless steel sheet 1.60mm thick for single and double rebated frames to profiles as per detailed drawings. Rebates shall be suitable for 42mm thick doors and fanlights. Stainless steel



frames to be used only in Patient Treatment facilities.

PRESSED STEEL CUPBOARD DOOR FRAMES: — shall be manufactured from 1.20mm thick mild steel sheet standard sections, having rebates for 42mm thick doors, and fitted with transoms and/or mullions where required and with sill section allowing the cupboard doors to be taken down to general floor level with the floor level inside cupboards not less than 12mm above general floor level. The frames are to be 102mm wide overall.

The sections are to be accurately bent to form the profiles. Corners are to be mitred and welded and reinforced at back with 1.60mm thick steel angle sections. Transoms, mullions and sills are to be neatly fitted at intersections and welded. All welds are to be solid and cleaned off flush, leaving a perfect outside finish.

All frames are to be fitted with rubber shock absorbers to the lock jambs of single doors, and to the head, transom and sill of double doors. Each door is to be fitted with standard corrugated adjustable building in lugs at jambs.

All frames are to be primed on all surfaces with an approved red-oxide zinc chromate priming coat in accordance with SANS Specification 909 before leaving the manufacturer's works, unless specified to be hot dip galvanized, and rates are to include for touching up where necessary with similar primer after building in.

Where frames are specified to be galvanized they are to be hot dip galvanized after manufacture in accordance with the relevant provisions of SANS Specification 763 for general applications on the relative thicknesses of metal.

Frames are to be fitted with one pair of 100mm five-knuckle loose pin steel hinges for each lower door or each leaf of lower double door and with one pair of 75mm five-knuckle loose pin steel hinges for each upper door or each leaf of upper double door. The three-knuckle leaf of each hinge is to be welded into the frame or mullion. Frames for single cupboard doors shall be prepared for locks or catches as specified and the frames for double doors are to be prepared for two barrel bolts for the first closing leaf of lower doors and one barrel bolt for the first closing leaf of upper doors.

Overall sizes are given to the nearest 10mm. Building in of the frames has been measured separately.

STEEL WINDOWS AND DOORS: — shall be in accordance with SANS Specification 727 and the frames are to be provided with fixing lugs or are to be holed for screwing as required.

Industrial type windows are to be suitable for glazing from the inside and all other windows from the outside, unless otherwise described.

Side hung and vertically pivot hung sashes shall open to at least 90 degree horizontally pivot hung sashes to at least 80 degree and bottom hung sashes to 30 degree. Unless otherwise stated, hinges for side hung opening out sashes are to be of the projecting type for easy cleaning.

All opening sashes are to have polished brass furniture.

The transoms and mullions of all purpose-made windows and doors are to be equally spaced between the outer frames of the windows and doors to form openings of equal size. Where this is not the case either the width or the height of the opening is stated, unless otherwise stated, the fixed lights and sashes of all purpose-made windows are to be in one square and the sashes and doors are to open out.

Windows and doors, unless otherwise specified, shall be of "one piece" construction. Composite windows and doors are to be supplied complete with all necessary standard coupling transoms or mullions.

Stock and purpose made residential type steel windows and school type windows of residential section shall be constructed of standard 25mm steel sections and of metal not less than 3mm thick.

Stock and purpose made industrial type steel windows shall be constructed with main frames of standard 35mm steel sections and of steel not less than 3mm thick, with sashes of standard 25mm steel sections and of steel not less than 3mm thick.

"Universal" sections, where specified, shall be not less than 33mm wide (measured over one opening section only) and of metal not less than 4mm. thick, and with all sight lines maintained (whether consisting of all fixed lights, all opening sashes, or portions of both) and with all glass in the same plane.

Stock and purpose made steel doors, sidelights and fanlights, shall be constructed with the doors of "Universal" sections as before described and the sidelights and fanlights of standard residential sections as before described. Bottom openings in doors and sidelights shall be fitted with kicking plates of one thickness of 1.60mm mild steel sheet fixed with metal beads. Frames of outward opening doors shall be fitted with bottom sills of door framing section (stepped sills) and of inward opening doors with metal ties welded to frames for embedding in threshold (flush sills)

Top Hung Sashes: — are to open out on a pair of steel hinges having brass pins and washers and fitted with brass peg stay, steel peg and locking bracket.

Outward Opening Side Hung Sashes: — are to open out on a pair of steel projection hinges having brass pins and washers and fitted with brass two-point handle and brass striking plate and brass sliding stay with friction fastener.

Inward Opening Side Hung Sashes: — are to open in on a pair of steel hinges having brass pins and washers and fitted with brass single point handle and steel engaging hook and brass sliding stay with friction fastener.

Bottom Hung Sashes: — are to open in on a pair of steel hinges having brass pins and washers and fitted with steel concealed side arms with brass guides and brass spring catch for long arm or hand operation and steel catch plate.

Horizontally Pivot Hung Sashes: — are to have brass adjustable friction ring centres and fitted with brass spring catch for long arm or hand operation and steel catch plate.

Projected Out Sashes: — are to be balanced on steel concealed side arms, the top of the sash fitted with spring loaded brass shoes to slide in brass guides and fitted at bottom with brass handle and brass striking plate.

Doors: — are to be hung on one and a half pairs per leaf of steel projection hinges with brass pins and washers and fitted with mortise lock set as specified, and each lock is to be provided with two keys.

Brass concealed bolts are to be fitted at top and bottom of meeting edge of first closing leaf of double doors. Sidelights and fanlights are to be hung as described for windows.

Adjustable Louver Sets: — are to be natural anodised aluminium louver sets of approved manufacture consisting of head and sill weather strips complete with neoprene gaskets and two jamb strips each fitted with louver brackets with spring loaded clips for the specified width of glass louver blades complete with tilt bars and operating lever handles. Where openings are not of a height to suit standard width louver blades an alternate head section with static clips must be provided to take a fixed louver blade of the required width. The louver sets are to be screwed to the steel window frame with stainless steel self-tapping screws and all portions of the louver set which come in contact with the window frame are to be insulated with approved pressure sensitive PVC tape to prevent electrolytic corrosion.



Burglar Bars: — are to be standard type burglar bars formed of 20 x 5mm mild steel bars riveted at intersections and riveted at ends to the window frames. The burglar bars to the small-pane type windows are to line through with the glazing bars and windows of the horizontal-pane type or of the no-glazing bar type are to be fitted with burglar bars which are divided as for the small-pane type window.

Fly screens: — are to be standard type fly screens suitable for residential opening-out type steel windows, unless otherwise described, and are to be constructed of stove enamelled pressed steel frames fitted with 0.25mm thick mosquito-proof mesh glass-fibre gauze. The fly screens are to be clipped onto the inner face of the steel window after all painting is completed.

All steel windows and doors are to be primed on all surfaces with an approved red oxide zinc chromate priming coat in accordance with SANS Specification 909 before leaving the manufacturer's works, unless specified to be hot dip galvanized, and rates are to include for touching up where necessary with similar primer after building in.

Where steel windows and doors are specified to be galvanized they are to be hot dip galvanized in accordance with the relevant provisions of SANS Specification 763 for general applications on the relative thicknesses of metal.

Loose metal glazing beads, where specified, are to be of an approved type and size, and are to be fixed with screws set in the correct positions for the type of glazing to be used, and neatly mitred at angles.

Immediately the windows and doors have been delivered on site, they are to be thoroughly overhauled and all necessary adjustments or repairs are to be made before they are fixed in position. A further inspection is to be made after building in and any further servicing required must be carried out in order to leave windows and doors in a satisfactory condition after glazing is completed.

All glass and glazing has been measured elsewhere.

Sizes of windows and doors are given to the nearest 10mm. The building in of windows and doors has been measured separately.

STAINLESS STEEL: — is to be of the thickness and grade specified and unless otherwise stated is to be buffed to an even satin finish to the approval of the Department.

All welding to stainless steel shall be by argon arc process and where filler rods are used these are to have properties not less than those of the parent metal. All welds are to be ground off smooth and uniform and the whole buffed to an even finish all over. Stainless steel is to be cut and bent in such a manner that a minimum of welding is required.

Where bending is required, all external angles are to be arras rounded and all internal angles are to be radiused.

All stainless steel work is to be of the highest quality and executed by specialists in this type of work and to the approval of the Department.

Note that where stainless steel fittings are specified and support work or fixings with bolts, nuts, rivets, etc, are required / specified, these fixings and support work are to be of stainless steel of the same rating / grade as the equipment specified.

ALUMINIUM AND ANODISED ALUMINIUM: — is to be of the brand specified or other approved and of 6063-TF or equivalent quality and temper.

Aluminium bars and sections shall comply with the relevant clauses of SANS 1476, extruded tube and hollow sections with the relevant clauses of SANS 1474, and sheet and

strips with the relevant clauses of SANS 1470. All alloys to be anodised are to be of anodising quality.

Aluminium is to be free from flaws, hammer and die markings or other imperfections.

Anodising of aluminium is to be carried out in accordance with SANS Specification 999 by an approved process. The average anodic film thickness shall be 25 micrometer, and at no point should the anodic film thickness fall below 22 micrometer or be thicker than 30 micrometer.

Prior to anodising, all surfaces are to be de-greased and cleaned, all irregularities removed and flushed off smooth and buffed where necessary.

All anodised aluminium must be coated with a suitable "non-yellowing" methylcrylate lacquer film, approved by the Department, over the entire surface. The lacquer film must be continuous and of a uniform average thickness not less than 10 micrometer. The lacquer thickness must be determined by use of a film meter or other instrument methods as described in ASTM B244-49T. Rates for anodised aluminium must include for this protective coating.

Before the work is put in hand, samples of finish are to be submitted to the Department for approval, and all finished work is to be equal in all respects to the approved samples.

The Contractor shall provide all samples required for testing in accordance with SANS Specification 999. If required, tests on the anodic film are to be carried out at the works of the anodised to verify that the work conforms to SANS Specification 999, the cost of which will be borne by the Contractor.

The surfaces of all aluminium which are jointed to or are in contact with other materials when fixed, particularly ferrous metals, are to be suitably insulated to prevent electrolytic corrosion.

Joints in all aluminium members are to be neatly formed in an approved manner with screw heads, pins, rivets, etc. concealed so that the joints are practically invisible. Screw or bolt jointing is to be kept to a minimum and will be permitted only when welding is impracticable. Unless otherwise described, stainless steel screws or bolts are to be used for jointing and fixing aluminium work. Welded joints are to be formed by argon arc process using SANS 1476/NS6 welding rods and finished off smooth.

Welding is to be executed in such a manner as not to affect the colour of the material or the anodic coating.

Exposed heads of screws, pins, rivets, etc. in coloured anodised aluminium are to be touched up with enamel paint to match the coloured anodised finish.

No deviation may be made from the general requirements or dimensions, but improvements in the general construction and design affecting neatness, strength or durability may be introduced. If any deviation is proposed, the Contractor must submit detailed drawings showing the particular construction and form or section he proposes to use and such drawings, details and samples of fittings, etc. are to be approved by the Department before manufacture is commenced and every facility must be given for the work to be inspected during manufacture.

No work may be fixed in position until it has been inspected and approved. Anodised aluminium work must be erected as near to the end of the Contract period as possible, to minimise the danger of damage or deterioration.

All work is to be suitably protected during building operations and left in a clean and satisfactorily finished condition on completion. In particular, all anodised aluminium work must be protected against damage, and against deterioration or discolouration caused by

mortar droppings, wax, paint, etc. all to the entire satisfaction of the Department. All work so damaged, deteriorated or discoloured must be replaced at the Contractor's expense.

Rates for aluminium work are to include for necessary cutting to lengths, shaping, turning, threading, forging, fitting, assembling, riveting, welding, welded running joints, filing smooth, also for all screws and holes and hoisting and fixing in position. All screwed work is to have full threads.

ANODISED ALUMINIUM WELDED WINDOWS AND DOORS: — are to be of an approved manufacture and design.

Windows and doors are to be fabricated from Medium Universal equal leg sections, unless otherwise specified, measuring 33mm over one opening section and not less than 4mm thick through the flanges and not less than 4.75mm through the web, unless otherwise stated.

The aluminium sections are to be of approved manufacture and of 6063-TF or equivalent quality and temper and are to be anodised after manufacture to the approval of the Department. Welds are to be electrically flash butt resistance welded, properly ground and cleaned off to give a uniform appearances.

Anodising, etc. is to be carried out as before described.

All windows and doors are to be suitable for internal glazing and are to be fitted with approved anodised aluminium glazing beads of the "clip on" type. Drilling for the fixing of glazing beads is to be done to suit the thickness of the glass used.

The frames are to be perfectly flat, square, butt-welded at joints (mechanical joints will not be permitted) and all opening sashes must fit perfectly on all faces and open or close freely without binding at any point. The glazing bars must be continuous with continuous intersections (mitred intersections will not be permitted) with ends scribed and fitted to the frames with shouldered ends passed through and riveted over. The sight lines of the main frame, whether consisting of all fixed lights, all opening sashes or portions of both and the glass plane must be the same throughout each window.

Weathering on sections is to be solid extruded with the sections (screwed or riveted on strips will not be permitted) except weather bars to sills of inward opening sashes which must be welded on and not screwed or riveted except in the approved designs of built-up transoms.

No steel is to be used in the manufacture of the windows unless it is stainless steel of quality to A.I.S.I. Type 316. All fittings, butt hinges, screws, nuts, bolts, etc. are to be of high quality aluminium or other approved non-corrosive material compatible with aluminium and of sufficient strength to perform the functions for which they are used. The handles, sliding stays and peg stays are to have nylon washers, bushes and pressure pads and are to be secured to the frames with screws having riveted ends. Pop rivet fixings will not be permitted.

The transoms and mullions of all purpose-made windows and doors are to be equally spaced between the outer frames to form openings of equal size. Where this is not the case, either the width or the height of the opening is stated. Unless otherwise stated, the fixed lights and sashes of all purpose-made windows and doors are to be in one square and the sashes and doors are to open out.

Frames must be provided with suitable fixing lugs bolted on to frame with aluminium alloy bolts or are to be holed for screwing as required with lugs or holes spaced one near top, one near bottom and not more than 750mm apart intermediately each side of frame. Frames more than 900mm wide are to be provided with similar fixings to top and bottom and not more than 750mm apart.

All composite windows, doors, etc. are to be supplied with suitable and approved coupling mullions or transoms. Rectangular hollow section transoms where specified are to be



25mm x 115mm in section manufactured from 3mm thick aluminium.

The Contractor must submit drawings showing details of sections he proposes to use and these drawings are to be approved by the Department before manufacture is commenced, and when requested, specimen windows and doors complete with all fittings as well as specimen coupling mullions, transoms etc. must be submitted for approval and all windows, doors, etc. supplied must conform to the approved samples.

The manufacturer of the windows and doors must supply a dimensioned set of drawings with the windows and doors, for use on the site, including clearance and strict fixing methods and details.

Windows and doors are to be delivered to the site in suitable protective wrappings or crates and are to be stacked on end and carefully handled at all times to prevent any marking or staining of surfaces.

Immediately the windows and doors have been delivered on the site, they are to be thoroughly overhauled and all necessary adjustments or repairs are to be made before they are fixed in position. A further inspection is to be made after fixing and any further servicing required must be carried out in order to leave the windows and doors in a satisfactory condition and waterproof after glazing is completed.

Side Hung Sashes: — are to open out on a pair of aluminium hinges complete with antifriction weatherproof bushings fixed pin and nylon washers and fitted with anodised aluminium alloy sliding stay with friction fastener and an approved anodised aluminium two point handle and striking plate.

Bottom Hung Sashes: — are to open in on a pair of aluminium hinges complete with antifriction weatherproof bushings, fixed pin and nylon washers and fitted with concealed side arms and strong lever action spring catch and keep.

Top Hung Sashes: — are to open out on a pair of aluminium hinges complete with antifriction weather proof bushings, fixed pin and nylon washers and fitted with anodised aluminium peg stay with cranked locking stay.

Horizontally Pivot Hung Sashes: — are to be hung on a pair of approved weatherproof brass satin-chrome finished friction pivots of the greatest possible diameter permissible and fitted at top with strong lever action spring catch for long arm or hand operation and striking plate, unless otherwise stated.

Vertically Pivot Hung Sashes: — are to be hung on free pivot cups at the head incorporating nylon bearing sleeves and lever pivots at the sill and fitted with one two-point casement handle and striking plate.

Projected Out Sashes: — are to be balanced on approved concealed side arms with stainless steel shoes and channels and fitted at bottom with one approved bow handle with catch incorporated.

Projected In Sashes: — are to be balanced on approved concealed side arms with stainless steel shoes and channels and fitted at top with strong lever action spring catch for long arm or band operation and striking plate:

Doors: — are to be side hung to open out on one and a half pairs of aluminium hinges to each leaf complete with anti-friction weatherproof bushings, fixed pin and nylon washers and fitted with lock set as specified, and each lock is to be provided with two keys. Satin chrome finish flush bolts are to be fitted at top and bottom of meeting edge of first closing leaf of double doors.

Adjustable Louver Sets: — are to be approved anodised aluminium adjustable louver sets consisting of head and all weather strips fitted with neoprene gaskets and two jamb strips



each fitted with louver brackets with spring loaded clips for the specified width of glass louver blades and complete with tilt bars and operating lever handles. Where the openings are not of height to suit standard width louver blades an alternate head section with static clips must be provided to take a fixed louver blade of the required width. The sets-sets are to be tap screwed to the window frame with stainless steel self-tapping screws.

GLAZING TO DOORS / ALUMINIUM GLAZED SCREENS

No glazing permitted to any fitting below Lock Rail (ie 1,2m high.).

Burglar Bars: — are to be standard type burglar bars formed of 20mm x 5mm aluminium bars riveted at intersections and riveted at ends to the window frame with high strength aluminium rivets. The burglar bars to the small pane type window are to line through with the glazing bars, and windows of the horizontal-pane type or of the no-glazing bar type are to be fitted with burglar bars which are divided as for the small pane type window.

All exposed surfaces of anodised aluminium are to be protected by means of an approved fabric backed adhesive tape. The Contractor shall satisfy the Department that the tape he proposes to use can be easily stripped after long exposure to sunlight, and rates are to include or the final stripping of the protective tape and cleaning dawn to approval at completion.

All work is to be protected during building against deterioration or discolouration caused by mortar droppings, wax, paint, etc. and all work so damaged is to be replaced at the Contractor's expense to the approval of the Department.

All glass and glazing has been elsewhere measured. All sashes and openings, unless otherwise stated, are to be single panes without glazing bars.

All windows and doors must be fixed into preformed openings in the structure (the buildingin of windows and doors will not be pen fitted) and rates are to include for supplying necessary templates for forming the openings. Fixing in position of windows and doors has been measured separately. Sizes of windows and doors are given to the nearest 10mm.

STRONG ROOM DOORS: — must comply in all respects with SANS Specification 1015 Category 1. Each door is to be provided with two keys and the keys must be forwarded by the supplier under registered cover direct to the Department, and the supplier must clearly indicate the institutions in which the door (or doors) is being installed.

BURGLAR RESISTING SAFES: — must comply in all respects with SANS Specification 751. The safes shall be "Office Safe Category 1" as laid down in SANS Specification 751. Each safe is to be provided internally with one shelf and two lockable drawers.

Where the mass of each safe is 680kg or less, provision must be made for securing it rigidly to prevent unauthorised removal; the means of securing shall be at least equal in effectiveness to that which would be provided by four 12mm bolts. Locks shall be lever locks with a minimum of six levers. Each safe is to be provided with two keys to each lock and the keys for any safe must be forwarded by the supplier under registered cover direct to the Department, and the supplier must clearly indicate the institution in which the safe (or safes) is being installed.

ADJUSTABLE LOUVER GEAR SETS: — are to be approved natural anodised aluminium adjustable sets consisting of head and sill weather strips fitted with neoprene gaskets and two jamb strips and fitted with sets brackets with spring loaded clips for the specified glass sets blades and complete with tilt bars and operating handles. Where the openings are **not** of a height to suit standard width sets blades an alternate head section with static clips must be provided to take a fixed sets blade of the required width.

RATES: — are to include for fixing in accordance with the manufacturers instructions for screwing head and sill weather strips and jamb strips with stainless steel screws to frames (Elsewhere measured) and for oiling and easing at completion.



12. PLASTERING

MIXING

The mixing of the materials is to be done on a hard surface.

Once all materials have been mixed, they are not to be remixed with new materials added after 5 (five) hours.

MATERIALS

Stone Chippings: — are to be approved clean stone chippings of the sizes stated complying with SANS Specification 1083.

River Sand: — for floor finishes and screeds is to be clean, sharp, coarse sand free from all impurities, washed if so directed and complying with SANS Specification 1090.

Plaster Sand: — is to be clean, sharp, free from all impurities, washed if so directed and is to comply with SANS Specification 1090.

Cement: — unless otherwise specified is to be Portland cement of normal setting quality, is to comply with SANS Specification 471, and must be used fresh. Cement containing more than 15% blast furnace slag will not be permitted to be used.

Lime: — is to comply with SANS Specification 523.

Water: — is to be clean, fresh and free from injurious amounts of acids, alkalis and other organic substances.

MEASUREMENT OF CONSTITUENT PARTS OF FLOOR FINISHES, TOPPINGS, SCREEDS AND PLASTER FINISHES: — Cement, sand and stone chippings are to be measured exactly by means of gauge boxes or purpose made wheelbarrows. Part filling or heaping of normal wheelbarrows will not be permitted.

Water is to be accurately measured for each batch, to approval.

Waterproofing compounds, where specified, are to be added to the mixture in the proportions recommended by and in strict accordance with the manufacturer's instructions.

PREPARATION OF SURFACES: — Prior to the application of floor finishes, toppings, screeds, plaster finishes etc. the surfaces of the new or existing concrete, brickwork, etc. are to be thoroughly cleaned, chipped, hacked, sloshed, etc. as necessary to ensure a satisfactory bond. The Contractor will be held entirely responsible for the proper and adequate preparation of the surfaces and any work which results in failure in this regard must be made good at the Contractor's expense to the satisfaction of the Department.

FLOOR SCREEDS, ETC: — Cement screeds are to consist of one part cement and three parts sand, unless otherwise described, and are to be steel towelled, unless otherwise stated, to true smooth and even surfaces, free from tool marks to the satisfaction of the Department to receive the finishes stated in the items. It is recommended that in new structures the screeding should be as specified by "Tal" using "Screedmaster", the pumped method.

GRANOLITHIC FINISH TO CONCRETE FLOORS, ETC: — Float up to within 6mm of finished surface with layers on concrete approximately 10mm thick, composed of one part cement, two and a half parts concrete and three and a half parts granite or other approved hard stone chippings. Form finished surface with one part cement and one part fine granite chippings or other approved hard stone graded up to particle, which will pass a 6mm mesh brought to a smooth surface with a steel trowel. The floating and finishing coats are to be performed in one operation.

The granolithic work is to be carried out by experienced workmen and is to be laid in panels



V-jointed and not and not exceeding 6m² in area or as shown on drawings or described in the Bills of Quantities.

Thin strips if wood or other suitable materials are to be laid between panels to break contact.

Where granolith is described to be tinted, the requisite quantity of oxide of iron or other colouring materials is to be mixed with the finishing thickness.

All granolithic floors, etc. are to be covered up and protected from injury and discolouration during the progress of the work.

Rates for granolithic work are to include for cleaning down and for a coat of approved wax polish or stoep reviver well rubbed in at completion.

13. PLASTER

GENERAL

Except where otherwise described, all external plaster is to be finished with a wood float and internal plaster is to be finished with a steel trowel, unless otherwise described, all to true and even surfaces, free from tool marks and other defects to the satisfaction of the Department. No distinction has been made for brick or concrete surfaces.

CEMENT PLASTER

External cement plaster to wall is to consist on one part cement and four parts sand.

External cement plaster to ceilings is to consist of one part cement and three parts sand.

Internal cement plaster to walls is to consist of one part cement and five parts sand.

Internal cement plaster to ceilings is to consist if one part cement and three parts sand.

One coat cement plaster to walls shall not be less than 13mm or more than 16mm in thickness, and one coat cement plaster to ceilings shall not be less than 10mm or more than 13mm in thickness, unless otherwise described.

Where plaster is described as undecorated, the same type of approved sand the same brand of cement is to be used throughout to maintain a uniform colour and texture.

BARIUM PLASTER

Barium plaster shall consist of two coats plaster, the first coat 13mm thick consisting of one part cement and five parts sand, and the second coat 6mm thick consisting of one part cement and five parts Barium Sulphate. (This is to be applied only to X-Ray Room walls where holed bricks have been used).

All surfaces are to be plastered in one operation from ceiling to floor and corner-to-corner; breaks are to be made only in corners or at junctions of walls and ceilings.

CURING, PROTECTION, ETC.: — All floor finishes, paving, plaster finishes and screeds are to be properly cured to approval and all cracks, blisters and other defects which may occur are to be made good and the whole left in a satisfactory-condition at completion.

The finished surfaces are to be properly protected from damage and cleaned down at completion.

RATES: — Rates for floor finishes and screeds are to include for preparation of new or existing surfaces, dressing to falls where required, V-joints where specified, curing, protecting from damage and cleaning down at completion.



Rates for skirtings, risers, etc. are to include for internal angles at junction with floor, treads, etc. to be square or coved to not more than 50mm girth and in addition are to include for mitres, stops, etc. except where given separately in terms of the Standard System of Measuring Builders' Work.

Rates for plaster finishes are to include for preparation of new or existing surfaces, curing, protecting from damage and cleaning down at completion.

Rates for plastering are to include for internal angles to be square or coved to not exceeding 50mm girth.

Rates for rounded angles, fair edges and arrases and the like are to include for mitres, stops, etc. except where given separately in terms of the Standard System of Measuring Builders' Work.

Rates for mouldings, projecting bands, coves, weatherings and the like are to include for dubbing out.

Rates are to include for cutting back against frames and for V-joints cut where concrete abuts brickwork.

Rates generally are to include for all sundry making good and working around pipes, balusters, etc.

GENERALLY

Narrow Widths

Items described as "Extra over for narrow widths" include for all reveals, edges, soffits, treads, risers, etc. not exceeding 500mm wide, narrow widths not exceeding 500mm wide in general surfaces caused by openings or projections, all of which have been included in the areas of horizontal or vertical surfaces. No distinction has been made for finishes of differing thicknesses.

14. **TILING**

MATERIALS

River Sand: —is to be clean, sharp, coarse sand, free from all impurities, washed if so directed and complying with SANS Specification 1090.

Plaster Sand: — for wall backings is to be clean, sharp, free from impurities, washed if so directed and complying with SANS Specification 1090.

Cement: —unless otherwise specified, is to be Portland cement of normal setting quality complying with SANS Specification 47I and must be used fresh. Cement containing more than 15 % blast furnace slag will not be permitted to be used

Water: -is to be clean, fresh and free from injurious amounts of acids, alkalis and other organic substances.

MEASUREMENT OF CONSTITUENT PARTS OF BACKINGS, ETC .: — Cement and sand are to be measured exactly by means of gauge boxes or purpose made wheelbarrows. Part filling or heaping of normal wheelbarrows will not be permitted:

Water is to be accurately measured for each batch to approval.

Waterproofing compounds, where specified, are to be added to the mixture in the quantities recommended by and in strict accordance with the manufacturers' instructions.



PREPARATION OF SURFACES: — Prior to the application of the backing for tiles, the surfaces of the new or existing concrete, brickwork, etc. are to be thoroughly sloshed, etc. as necessary to ensure a satisfactory bond. The Contractor shall be held responsible for the proper and adequate preparation of the surfaces and any work which results in failure in this regard must be made good at the Contractor's expense to the satisfaction of the Department.

GLAZED CERAMIC WALL TILES AND FITTINGS: — shall comply with SANS Specification 22 of selected grade, free from defects and blemishes and of uniform colour.

Rates are to include for either bedding tiles on and including a solid cement mortar backing consisting of one part cement to three parts sand on brickwork or concrete, or fixed with an approved tile adhesive on and including a coat of cement plaster consisting of one part cement to five parts sand and finished to a surface to receive tiles.

Tiles are to have vertical and horizontal joints continuous with all joints solidly flushed up in neat white cement.

MOSAICS: — Glass or ceramic mosaics are to be of approved South African manufacture of the sizes and colours specified, fixed to paper panels for ease of handling.

Mosaics are to be bedded to a true even surface on and including a solid cement mortar backing consisting of one part cement and three parts sand on brickwork or concrete, or fixed with an approved mosaic adhesive on and including a coat of cement plaster consisting of one part cement to three parts sand finished to a surface to receive mosaics.

After setting, the paper panels are to be removed and all joints are to be solidly flushed up in neat white cement.

Samples of mosaics are to be submitted to the Department for approval before any work is put in hand.

UNGLAZED CERAMIC FLOOR TILES AND FITTINGS: — are to be unglazed acid and alkali resistant tiles and fittings of the types specified in the items, and of approved manufacture, uniform in size, shape and colour, free from cracks, twists and other defects and equal to samples to be deposited with and approved by the Department.

Floor tiles are to be laid with maximum 10mm wide joints continuous in both directions on and including a 15mm thick cement mortar bed consisting of one part cement to three parts sand, unless otherwise specified, to true levels and grades with the joints raked out and grouted up solid and flush pointed with an approved epoxy jointing compound.

Floor tiles are to be set out so as to have no long edges of tiles cut to suit room size.

RATES: — for tiles, mosaics, etc. are to include for all necessary preparation of surfaces, for laying in accordance with the manufacturer's instructions, all square cutting and waste and fitting, protecting from damage and cleaning down at completion.

Rates for tiles are also to include for laying, bedding, jointing and pointing as described and in accordance with SANS Code of Practice 0107 where applicable.

Rates for treads, risers, sills, copings, cappings, skirting etc. are to include for pointing to exposed edges and projecting soffits.

No distinction has been made for brick or concrete surfaces.

TRANSITION TRIMS:-

Aluminium Wide Tile-In Ramp splayed transition trims to be used at junction between ceramic / porcelain tiles and vinyl sheeting.

MOVEMENT JOINTS:-

Aluminium Structural Screed joints bolted to slab to be capable of total movement of minimum of 5mm either way with flexible PVC Hospital Insert.

Movement joints to be in high traffic area's as "Migua" FV35/1500 or "Kirk" ASSJ390H of approved height with hospital insert bolted to slab before screeding.

Metal movement joints in low traffic area's with hospital insert strips...

15. DRAINAGE AND PLUMBING

GENERALLY: —The Standard Preambles for other trades, with reference to Excavations, Concrete, Brickwork and Plastering, and, in particular for the full description intent and meaning of the classification for excavations, are to apply equally to this trade.

LICENSED DRAINLAYERS AND PLUMBERS: — Only licensed drain layers shall be employed on any drainage work and licensed plumbers on plumbing work.

SUBSOIL DRAINS

Unplasticised polyvinyl chloride (UPVC) slotted drainage pipes and fittings: — shall be of approved manufacture jointed in accordance with the manufacturer's instructions.

Pitch-fibre perforated or slotted drainage pipes and fittings: shall comply with SANS Specification 921 and shall be jointed in accordance with the manufacturer's instructions.

Filter fabric: — shall be non-woven, spun bonded, needle punched and continuous polyester fabric, resistant to the effects of alkalis, acids, saline solution and sunlight.

STORMWATER AND SOIL DRAIN PIPES

Reinforced concrete non-pressured pipes: shall comply, with SANS Specification 677 and must be Type SC of the class specified with spigot and socket ends with rubber insertion ring or with ogee joints with approved rubber collars. Pipes must be marked with the manufacturer's name, trade name or registered trade mark, nominal bore, class and type, date of manufacture, the letter "R" denoting reinforced and the SANS mark. Joints shall be made in accordance with SANS Code of Practice 058.

Unplasticised polyvinyl chloride (UPVC) drain and sewer pipes and fittings: — shall comply with SANS Specification 791. Joins shall be made with fittings in accordance with SANS Code of Practice 058.

CONCRETE BEDS AND ENCASEMENT TO DRAIN PIPES: — Where pipes are required to be bedded on concrete, the bed of concrete shall be Class B, a minimum of 500mm wider than the diameter of the pipe, laid to correct falls and levels with recesses formed in same for pipe joints including all necessary formwork and any additional excavation. The barrel of the pipe shall then be bedded on a thin cement mortar (1:3) bed and laid to falls. After jointing, the recesses previously formed shall be filled in with concrete Class B and the haunching or surrounding completed.

Where pipes are fixed vertically they shall be encased in concrete Class B having a minimum thickness of 150mm around the pipe and carried up to ground level and shall include for any necessary formwork.

PIPE LAYING: — All drain and sewer pipes are to be laid to a straight line to even gradients and jointed in accordance with SANS Code of Practice 058 except in the case of polyethylene or unplasticised polyvinyl chloride drain and sewer piping which is to be in accordance with SANS Code of Practice 01 12.

Before laying, each pipe shall be examined to ensure that the bore is clean and free of any foreign matter and shall be tested for soundness by striking with a wooden mallet, and any cracked or damaged pipes shall be rejected. Ends of all pipes must be clean before



jointing. Immediately after jointing a tight fitting wad or scraper shall be drawn several times through the bore of the pipe to ensure that it is left clean and free from obstructions. Whenever work is suspended, the open ends of pipes and junctions must be temporarily plugged to prevent the entrance of rubbish during construction.

GULLEY TRAPS: — Gulley trap assemblies must be of the material specified with "P" or "S" trap, jointed to drain and with hopper head with vertical and side inlets, the head fitted with 190mm diameter cast iron gulley grating complying with SANS Specification 1115 laid loose in socket. The trap, hopper head and vertical pipe shall be set on and encased in concrete Class B having a minimum thickness of 150mm at any one part, carried up 75mm above ground level as kerb, dished down to grating and finished on all exposed surfaces in 1:3 cement plaster with angles rounded, including necessary excavation and formwork.

GREASE TRAPS: — Grease trap assemblies of vitrified clay must consist of outlet junction jointed to trap with side inlet. Access openings of trap and junction shall be fitted with vitrified clay stoppers laid loose in socket of trap and set in bitumen in socket of junction. The trap and junction and vertical pipe shall be set on and encased in concrete Class B having a minimum thickness of 150mm at any one part, carried up 75mm above ground level as kerb, dished down to grating and finished, on all exposed surfaces in 1:3 cement plaster with angles rounded, including necessary excavation and formwork.

RODDING EYES: — Where pipes are carried up in ramps for rodding eyes, the head of the pipe at ground level must be fitted with an "A.B.C." cast iron cover and frame, complying with SANS Specification 746, jointed to pipe, the frame rebated for and including cover with raised letters "CE" cast on same, secured to frame with gun-metal screws and with the whole encased in concrete Class B having a minimum thickness of 150mm at any one part, carried up 75mm above ground Level and finished on all exposed surfaces in 1:3 cement plaster with angles rounded, including necessary excavation and formwork,

INSPECTION EYE BLOCKS: — Where inspection eye fittings are provided in pipelines, the position of these inspection eyes must be registered and demarcated with concrete Class C. block size 300 x 300 x 50mm thick finished on all exposed surfaces with 1:3 cement plaster with angles rounded and with sunk letters "I.E." formed in top and set in ground, including necessary excavation and formwork.

SURFACE WATER CHANNELS: —Concrete open surface water channels shall be formed with concrete Class B with segmental channel formed in same to the size and shape specified and finished on exposed surfaces in 1:3 cement plaster, steel towelled to a smooth even surface with all angles rounded, cast in lengths not exceeding 2m and laid to falls, including necessary excavation and formwork.

GRATINGS FOR GULLEYS AND STORMWATER DRAINS AND CAST IRON SURFACE BOXES AND MANHOLE COVERS AND FRAMES: — Cast iron or Polymer gratings for gulleys and storm water drains shall comply with SANS Specification 1115 and SANS 1882;2003 respectively.

Cast iron surface boxes and manhole covers and frames shall comply with SANS Specification 558.

All cast iron gratings, cast iron surface boxes and cast iron manhole covers and frame must be coated with approved preservative solution before leaving the manufacturer's works.

The masses stated are the combined mass of the grating and frame or the combined mass of the cover and frame.

STORM WATER SUMPS, JUNCTION BOXES, MANHOLES, INSPECTION CHAMBERS, CABLE INSPECTION CHAMBERS AND VALVE CHAMBERS: — shall be of the internal size specified and are to be constructed of one brick sides, unless otherwise specified, built in 1:3 cement mortar on a 150mm thick concrete Class C bottom and finished on top with an 85mm thick pre-cast concrete Class C cover slab, reinforced as detailed and bedded in



cement mortar. The cover slab, except to junction boxes, is to have a rebated opening formed in same, suitable for and fitted with a cast iron orating and frame, or cover and frame, of the size and mass specified with the frame bedded in cement mortar. The bottom of the sump, manhole, etc. and the exposed surfaces of the cover slab are to be finished smooth in 1:3 cement plaster with angles rounded. The internal brick surfaces are to be faced with smooth facing bricks and pointed with flush joints.

Inspection chambers and manholes with an invert not exceeding 1m shall have an internal dimension of 470mm x 700mm and those exceeding 1m shall have an internal dimension of 920mm X 920mm. Where the invert of the hole exceeds 1m, a 150mm thick reinforced concrete Class C corbel slab, reinforced as detailed, with opening size 470mm x 700mm formed in same and finished smooth off the formwork, is to be built into the brick sides at a height not exceeding 1, 5 inches above the concrete bottom with the reduced manhole shaft built off the top of the corbel slab. Cast iron step irons spaced at 300mm staggered centres vertically are to be built into one side of all manholes with an invert exceeding 1m.

Where measured in number, rates for all sumps, manholes, etc. are to include for excavating to the depths required, taking precautions against collapse of sides of excavations, staging, ramming, pumping and baling to keep excavations free from water or mud, filling around and ramming and depositing and levelling spoil on site or carted away as directed. Ends of pipes are to be built through the sides of the sumps, manholes, etc. and rates are to include for this.

SOIL DRAIN MANHOLES AND INSPECTION CHAMBERS: —are to be of the internal diameter and inverts specified and are to be constructed of pre-cast reinforced concrete manhole ring sections with walls a minimum of 50mm thick, pre-cast reinforced concrete cover slabs and spacer pieces complying with SANS Specification 677. The joints for the ring sections shall be of the ogee type. The bottom shall be of concrete Class C-cast insitu.

The placing of the concrete bottom and benching shall be carried out in three stages with the initial stage being the laying of the concrete bottom projecting 100mm beyond the external diameter of the manhole on which is laid the inspection eye pipe, branches, etc. The second stage comprises the laying of concrete within the manhole to the height of the pipes and around the perimeter of the bottom to a height of not less than 25mm above the collar of the pipe at the highest end. This annular base is to be shuttered to provide a horizontal setting for the first ring section which is to be firmly bedded in the wet concrete. The third stage comprises the laying of the benching within the initial ring section and finished in 1:3 cement plaster with all angles rounded. Thereafter, the ring sections of the required standard height are joined together to form the required depth, with all joints primed with "Bituprime" and sealed with "Bitujoint Putty". A 125mm thick pre-cast reinforced concrete cover slab, rebated on underside to suit ring sections and with opening size 600mm x 600mm formed in same is to be bedded on top of the ring section. The shaft above the cover slab is to be constructed of either pre-cast reinforced concrete spacer units to suit the type of cast iron cover and frame specified, or one brick kerb walls faced internally with smooth facing bricks jointed with flush joints, and finished on top with an 85mm thick pre-cast concrete Class C cover stab, reinforced as detailed and bedded in cement mortar with the exposed surfaces finished smooth in 1:3 cement plaster with all angles rounded. The cover slab is to have a rebated opening formed in same suitable for and fitted with cast iron cover and frame of the size and mass specified, with the frame bedded in cement mortar.

MANHOLE COVERS AND FRAMES:- Cast iron, Concrete or Cultured Polymer covers and frames to be suitable for the area of usage.

SOAK PITS: — shall be of the lengths and widths specified and shall be a minimum of 900mm deep below the invert of the inlet pipe. A perforated pitch-fibre drainpipe, jointed to the inlet pipe and with other end capped, is to be laid level in a 19mm stone packing of a minimum thickness of 15mm below and at sites of pipe and a minimum thickness of 150mm below the top of the pipe. The remainder of the soak pit is to be filled with stone graded

from 50mm to 75mm, to a level of 50mm above the top of the pipe. The stone is to be covered with corrugated asbestos cement sheets extending 150mm beyond the walls of the soak pit all round. The trench shall be backfilled above the sheeting to a minimum depth of 300mm-lightly_rammed_with the final 100mm of backfilling being approved topsoil from the excavations.

SEPTIC TANKS: —shall be of the internal sizes specified and are to be constructed of one brick sides built in 1:3 cement mortar on 150mm thick concrete Class C bottom laid to falls. A half brick baffle wall finished 75mm below underside of concrete cover slab and with opening size 150 x 150mm high formed in wall is to be built in 1:3 cement mortar on the concrete bottom. A 115mm thick reinforced concrete Class C cover slab, reinforced as detailed, is to be cast in-situ on removable formwork and is to have two openings formed in same, each suitable either for and fitted with 600 x 450mm x 38 kg cast iron single seal manhole cover and frame, or for the shaft of the inspection chamber built off the cover slab in one, brick walls in 1:3 cement mortar with smooth face bricks internally, finished on top with 85mm thick pre-cast concrete Class C cover slab, reinforced as detailed and rebated for and fitted with 600 X 450mm X 38-kg cast iron single seal manhole cover and frame. The bottom and sides of the septic tank are to be finished in 1:3 cement plaster, 19mm thick, with an approved waterproofing compound added, with all internal angles coved to 50mm radius. Inlet and outlet chambers attached at either end of the septic tank shall be size 600 x 450mm internally, of the depth required and each shall be constructed of one brick walls built in 1:3 cement mortar on a concrete Class C bottom 150mm thick, or where extended above the top of the septic tank cover, built off the cover and finished on top with 85mm thick pre-cast concrete Class C cover slab, reinforced as detailed and bedded in cement mortar with the exposed surfaces finished smooth in 1:3 cement plaster with angles rounded. The cover slab is to have a rebated opening formed in same suitable for and fitted with a 600 x 450mm x 38 kg cast iron single seal manhole cover and frame. Chambers shall be provided with inspection eye pipes or bends, straight or curved channel sections, benched up to sides of chambers in concrete Class C, finished in 1:3 cement plaster with all angles rounded.

The inlet and outlet of the septic tank shall be formed of cast iron square junction piece with tail-pipe extending 300mm below water level in tank, built in through end walls and jointed to channels in inlet and outlet chambers.

TESTING OF DRAINS, MANHOLES AND INSPECTION CHAMBERS: — All drains, manholes and inspection chambers with the exception of subsoil drains shall be constructed so as to be watertight. No trenches shall be backfilled or pipes encased in concrete until the drains have been tested and approved. Any drains covered by the Contractor prior to testing shall be exposed at the Contractor's expense.

The Contractor shall give at least 24 hours notice of any particular length between manholes ready for testing. The drains shall not be tested until a period of 24 hours, or such other period as may be required, has been allowed for the pipe joints to set. The Contractor shall provide all necessary testing apparatus, expanding plugs, stoppers, water and any other materials and all labour that may be required for carrying out the tests.

The whole of the drainage system shall be tested using one or more of the following tests:-

- (a) Visual test— Each length of pipe shall be inspected for invert level grade, direction and line. Internal inspection of the bore of the pipes shall be made using mirrors and a powerful source of light. The drains must be free of invert lips and the bases of the pipes must be straight.
- (b) Air test All openings in the drain shall be plugged and sealed and all associated traps filled with water and air pumped into the drains until a manometric pressure of 40mm is indicated, after which, without further pumping, the pressure shall not drop below 25mm for a period of at least 30 seconds. After the entire drainage system has been completed, all plumbing fittings installed and permanently connected up, and traps filled with water, a final air test shall be applied to

the whole system.

(c) Water test— All openings-in the drain, except the highest one, shall be plugged and sealed and the drain filled with water so that every part of the system is tested under a head of water of not less than 1.5m and not more than 3.5m. After allowing period of 10 minutes for initial absorption, the amount of water it shall be necessary to add to maintain the water level over the next 15 minutes shall not exceed a rate of 25 litres for 100mm diameter pipe and 3,75 litres for 150mm diameter pipe for 100m of drain and an equivalent rate for larger drains. In carrying out the water test, the head of water shall be obtained by providing temporary pipes, fittings, etc. wherever necessary or by such other method as may be approved.

In cases where the maximum head of water, owing to the gradient of the drains, would be exceeded in any section, inspection eyes at suitable intervals may be provided and the drain plugged, in order not to subject the lower portion of the drain to a greater head of water than that required. Drains must be free of air before testing.

(d) Manhole and Inspection Chamber test — The inlet and outlet pipe hose shall be plugged and sealed and the inspection chamber filled with water. After allowing the water to stabilise due to absorption, the water level should not fall more than 5mm in 2 hours.

DEFECTS TO BE MADE GOOD: — Should the drain system fail to withstand the above tests, all defects shall be made good and the tests repeated at the Contractor's expense until the whole system is sound and passed to the satisfaction of the Department. In making good, all defective parts shall be cut out and replaced with new. No patching of pipes, joints or connections will be permitted.

SHEET METALWORK: — generally is to be lapped 75mm at ends and 150mm at angles, unless otherwise specified. Rates for sheet metalwork shall include for all labour, cutting and waste, laps, seams, welts, angles, clips, tacks, soldered dots, riveting, soldering, brazing, burning, nailing, dressing and wedging as required. All measurements are net with no allowance being made for laps, seams, welts, angles, clips and tacks or waste in cutting. Where stepped flashings are described as to flat slope, the pitch of the roof to which they apply does not exceed 40 degrees

- (a) Galvanized sheet iron: shall be of an approved brand of the thickness specified after galvanising and having a galvanized coating of "Iscor Coating Designation Z450". Corroded or otherwise defective sheets shall not be used. All nailing or screwing shall be done with galvanized nails or screws.
- (b) **Sheet aluminium**: shall be of the thickness and quality specified. All nailing shall be done with aluminium alloy nails and all screwing done with stainless steel screws.
- (c) Sheet copper: shall be cold rolled sheet of the thickness and temper specified. Sheet copper for covering flat roofs and for valley and gutter linings, flashings, soakers, etc. shall be of dead-soft temper and for eaves gutters, rainwater pipes and other unsupported or semi self-supported work shall be of half-hard temper. All nailing shall be done with copper or copper alloy nails and all screwing done with brass screws.
- (d) Sheet lead: shall be best milled sheet lead of the full mass specified and of equal thickness throughout and must comply with SANS Specification 1178.

LININGS TO VALLEYS: — shall be of the material specified, lapped 200mm at ends and dressed up on to purlins or battens at sides of valleys with edges bent back to form open beads.

LININGS TO SECRET GUTTERS: — at back of chimney stacks and wall abutments and at raking intersections of walls and roofs shall be of the material specified, turned 100mm up vertical surfaces and dressed 250mm up roof slope and on to purlin or batten at edge.



SOAKERS: — to slate covered roofs shall be of galvanized sheet iron or sheet copper of 0.6mm thickness, 450mm wide to closed valleys and 250mm wide to raking intersections of roofs with vertical wall and chimney stack abutments and turned 75mm up vertical surfaces. Soakers shall be 75mm longer than the gauge of the slate roofing.

UNDER-FLASHINGS: — to all iron roofs and where specified to slate or tiled roofs shall be 0.6mm thickness galvanized sheet iron. Flashings to asbestos cement roofs shall be asbestos cement preformed units fitted in accordance with the manufacturer's instructions. Where specified, copper flashings shall be formed from sheet of 0.6mm thickness and aluminium flashings shall be formed from 1200-H4 quality sheet of 0.6mm thickness. Lead flashings, where specified, shall be formed from sheet having a mass of 24 kg/in 2.

COVER FLASHINGS: — shall be either galvanized sheet iron, copper or aluminium, as specified, of 0.6mm thickness fitted over under-flashing, stepped where required on rake and with top edge bent and wedged 25mm deep into joint of brickwork or groove formed in concrete face and flush pointed in 1:3 cement mortar.

FLASHINGS AROUND PIPES THROUGH ROOF COVERINGS

- (a) Pipes through preformed sheet steel roofing shall be flashed around with 0.6mm galvanized sheet iron apron pop-riveted to top of roofing wit edges cut and dressed to profile of roofing, soldered all round and with conical sheet iron 'u' stand, riveted and soldered at joint and at base to apron. The top of the conical upstand is to be fixed around the pipe with 25mm x 3mm galvanized mild steel strap wrapped around the pipe and fixed with a galvanized steel gutter bolt.
- (b) Pipes through fibre cement roofing shall be flashed around with 24 kg/in 2 lead a on dressed into corrugations, bedded in mastic and bolted to roof sheeting with galvanized steel gutter bolts and with conical lead upstand, wiped on at joint with apron, and secured around pipe with copper wire.
- (c) Pipes through slate or tile roofing shall be flashed around with 24 kg/in 2 lead apron dressed to profile of slates or tiles with top edge of lead apron dressed over back edge of slate or tile under overlap of slates or tiles. A conical lead upstand, wiped on at joint with apron, is to be secured around the pipe with copper wire.
- (d) Pipes through pre-printed or embossed sheet steel or aluminium roofing shall be flashed around with flexible glass-fibre reinforced waterproofing dressed to profile of roofing, pop-riveted around edges to roofing and dressed up and around pipe. The waterproof is to be finished in a colour to match that of the roofing material.

RAINWATER PIPES

GENERALLY:

Full bore outlets for flat roofs are not allowed. Where flat roofs are specified, it is preferred to have a drain along the edges into a common outlet. Where roof cover is of 'Chromodek' sheets, the preferred guttering is of the same material in the same colour in continuous lengths.

- (a) Unplasticised polyvinyl chloride (UPVC) rainwater pipes and accessories shall comply with SANS Specification 967 and must be fixed clear of the finished wall face on stock pattern brackets in accordance with the manufacturer's instructions.
- (b) Galvanized mild steel rainwater pipes, shall be medium quality screwed and socketed normalised welded mild steel pipes, galvanized inside and outside, and shall comply with SANS Specification 62.

Fittings for galvanized mild steel pipes shall comply with SANS Specification 509. The screwed joints must be made with lead paint and hemp or approved thread sealing tape. The pipes must be fixed clear of the finished wall face with galvanized cast iron hinged



holderbats built into walls at not exceeding 2m centres in 1:3 cement mortar.

EAVES GUTTERS

a) Galvanized sheet iron gutters, rainwater heads, etc. shall be formed from 0.6mm sheet and must have beaded edges with all laps riveted and soldered. Corners must be reinforced with 0.6mm X 50mm wide galvanized sheet iron strips and must be soldered across the inside of the angles.

Gutters must be laid to even falls on approved galvanized mild steel gutter brackets screwed to roof timbers at approximately 1m centres. Half round pattern gutters shall be bolted to each bracket with 6mm galvanized gutter bolt fitted close to the beaded edge. Rectangular pattern gutters shall be fixed at each bracket with galvanized mild steel long-screw with 1mm thick galvanized sheet iron spacer tube.

- (b) Fibre cement gutters and accessories shall be of approved manufacture, not less than 6mm thick, with spigot and socket joints made in an approved mastic compound in accordance with the manufacturer's instructions. Gutters must be laid to even falls on approved aluminium alloy or stock asbestos cement brackets screwed to roof timbers at the manufacturer's recommended spacings.
- (c) Unplasticised polyvinyl chloride (UPVC) gutters and accessories shall comply with SANS Specification 11 and must be laid to falls and fixed on brackets in accordance with the manufacturer's instructions.

SANITARY PLUMBING AND FITTINGS, WASTE, VENTILATION AND ANTI-SIPHON PIPES

- (a) Unplasticised polyvinyl chloride (UPVC) pipes and fittings shall be of approved manufacture marked with the manufacturer's name and trade name, the nominal bore and the South African Bureau of Standards mark and shall comply with SANS Specification 967. Joints shall be made with injection moulded fittings in accordance with the manufacture's instructions and SANS Code of Practice 0112. The pipes must be fixed clear of the finished wall face with aluminium alloy holderbats fitted with plastic cushion strips with the holderbats fixed to plugs in wall.
- (b) **Polypropylene pipes and fittings** shall be of approved manufacture and shall have a mechanical form of jointing. Pipes and fittings are to be fixed and jointed in accordance with the manufacturer's instructions.
- (c) **Multilayed pipes** shall be of approved manufacture and shall have a mechanical form of jointing. Pipes and fittings are to be fixed and jointed in accordance with the manufacturer's instructions.

SANITARY FITTINGS: — All sanitary ware must comply with SANS 497 Specifications and be fitted with Ball-O-Cock valves in supply lines.

Wash hand basins shall be of white glazed fireclay or vitreous china of the type and size specified. Basins shall have an integral overflow to non patient treatment facilities and be fitted with 32mm chromium plated waste union with flange and grating, rubber plug on chromium plated brass chain and, where required, tap hole stopper cemented in.

WC pans shall be of white glazed fireclay or vitreous china of the type specified with 'S" or "P" trap with straight or side outlet and shall be fitted with single or double flap plastic seat as required, secured to pan with concealed brass holding down bolts. Pans shall be bedded on the concrete floors in 1:3 cement mortars. Pans in seclusion rooms and other public areas to be 'Gypsy' vandal proof – or other approved.

Glazed ceramic urinals of the bowl or stall type shall be of white glazed fireclay or vitreous china. Bowl urinals shall be fitted with 40mm chromium plated waste union, with flange and



domical grating and with spreader with flush pipe connector. Stall urinals shall be fitted with 75mm chromium plated waste union with flange and hinged domed grating and with spreader with flush pipe connector.

Flushing cisterns shall be as specified, either of white porcelain enamelled cast iron, white glazed fireclay, vitreous china or black plastic complying with SANS Specification 821, each with body and cover. Cisterns shall be a maximum of 11 litre capacity and the flushing apparatus shall be of brass, copper or other corrosion resistant metal, PVC or other approved plastic or of an approved ceramic material. All cistern lids must be able to be screwed down. Connections for flush pipe, inlet and overflow pipe must be provided in the body. Cisterns shall be fitted with 15mm brass ball valve with copper, PVC or polystyrene ball and with either chromium plated operating lever handle or galvanized steel pull chain and handle. A galvanized, white enamelled or chromium plated steel or copper flush pipe, of the required length, as specified, is to be jointed to the flush pipe connection on the body of the cistern and in the case of WC pans is to be fixed to the inlet of the pan with an approved patent adaptor. From the overflow connection on each cistern a 22mm copper overflow pipe, bent as required, shall be taken through wall to discharge externally, with ends splay cut and projecting 50mm beyond wall face, or where this is not possible, bent to discharge into WC pan.

Baths shall be enamelled cast iron baths of the type and size specified, holed for and fitted with chromium plated brass overflow union with grating, 40mm chromium plated brass waste union with flange and grating, rubber plug on chromium plated brass chain and fitted with adjustable cast iron feet. The fall along bottom of baths from head ends to outlets must be adequate for complete emptying.

Stainless steel sinks and drainers shall be of the types and sizes specified with exposed surfaces buffed to a satin finish and sound deadened on underside by application of an approved sound deadening coating. Splashbacks with tiling keys shall be provided at back and at ends against walls or as specified. Sink bowls are to be pressed out of single sheets with complete drainage to outlets and each bowl is to be fitted with integral built-in overflow with chromium plated brass grating and 40mm recessed waste outlets with chromium plated brass waste union with grating, rubber plug and chromium plated brass chain. Sink bowls, unless otherwise specified, are to be 450 x 355 x 140mm deep. Drainers are to be pressed out of single sheets and are to have pressed flutes to give complete drainage.

- (a) For domestic use Sinks shall comply with SANS Specification 242 and shall be manufactured from A.I.S.I. Type 430 stainless steel 0.8mm thick for units not exceeding 2,4m long and from stainless steel 1.2mm thick for units exceeding 2,4m Long. -
- (b) For hospital use and laboratories Sinks shall be manufactured from A.I.S.1. Type 304 stainless steel 0.9mm thick for units not exceeding 2.4m long and from stainless steel 1.2mm thick for units exceeding 2.4m long.

Stainless steel wash hand basins and wash troughs shall be of the types and sizes specified complying with SANS Specification 906, with exposed surfaces buffed to a satin finish and sound deadened on underside by application of an approved sound deadening coating. Each basin or wash trough in non patient treatment area's are to be fitted with integral built-in overflow with chromium plated brass grating and 40mm recessed waste outlet with chromium plated brass waste union with grating, rubber plug and chromium plated brass chain.

Stainless steel urinals shall be of the types and sizes specified complying with SANS Specification 924 and shall be manufactured from A.I.S.I. Type 304 stainless steel, 1.2mm thick, buffed to a satin finish and sound deadened at back by application of an approved sound deadening coating. The back and sides of urinals are to be made rigid by means of integral pressed ribs or by bowing. Edges at sides and top are to have plaster key. Tread plates are to be ribbed and the front edges are to be stiffened and bent to form key for floor finish. The trough shall be a minimum of 125mm wide and half round in section with all corners radiused and shall fall to ensure complete drainage to 75mm recessed outlet with

chromium plated domed hinged grating and frame.

RATES FOR SANITARY WARE: — shall include for the supply and fixing of the units as specified and for cleaning, washing and leaving in a satisfactory condition on completion.

BELOW GROUND WATER RETICULATION

Unplasticised polyvinyl chloride (UPVC) piping and fittings shall be of approved manufacture complying with SANS Specification 966. Pipes must be of the class specified and must be marked with the manufacturer's name, trade name or registered trademark, nominal diameter, class reference and the SANS mark. Pipes shall be laid and jointed in accordance with the manufacturer's instructions.

High density polyethylene (HDPE) piping shall be of approved manufacture complying with SANS Specification 533 and shall be of the class specified, laid and jointed in accordance with the manufacturer's instructions. Piping must be jointed with compression fittings with compression rings and coupling nuts.

High Density Polyethylene / Polypropylene / Multilayed piping shall be of approved manufacture, complying with SANS Specification 15875-1-2004 & 2/2003 & 1315, laid and jointed in accordance with the manufacturer's instructions.

Copper piping shall be of approved manufacture complying with SANS Specification 460 and shall be of Class 2. Pipes must be jointed with brass compression fittings with compression rings and coupling nuts complying with SANS Specification 1067 Part I Type 'A'. Copper piping must be bent, where required, with an approved bending machine.

ABOVE GROUND WATER SUPPLIES

Colour Coding Cold Water Supply the exposed piping for this non potable (recycled) water shall be colour banded Brilliant Green (B49) / Yellow Band(H10). The other exposed piping for potable (drinkable) water shall be colour banded Brilliant Green (B49) / Blue Band(F29)

Galvanized mild steel piping for water supplies shall be medium quality screwed and socketed normalised welded mild steel pipe, galvanized inside and outside, and shall comply with SANS Specification 62.

Fittings to galvanized mild steel piping shall be steel pipe fittings complying with SANS Specification 62 or malleable cast iron fittings complying with SANS Specification 509.

Copper piping shall be of approved manufacture, complying with SANS Specification 460 and shall be of Class 2 – fixed and jointed in accordance with the manufacturer's instructions. Class 2 copper piping must be jointed with brass compression fittings with compression rings and coupling nuts complying with SANS Specification 1067 part I Type 'A'.

Polypropylene / **Multilayed Piping** shall be of approved manufacture, complying with SANS Specification 1315, laid and jointed in accordance with the manufacturer's instructions. This applies to hot and cold water supply within ceiling spaces also.

Stainless steel piping shall be of approved manufacture, complying with SANS Specification 4127 and shall be A.I.S.I. Type 304 L. Fittings to stainless steel piping not exceeding 50mm nominal bore shall be brass compression fittings with compression rings and coupling nuts.

Piping exceeding 50mm nominal bore shall be welded piping with 1.5mm wall thickness, unless otherwise stated, and of A.I.S.I. Type 316 stainless steel. Joints are to comprise approved A.I.S.I. Type 316 stainless steel pressed collars welded to ends of pipes and fittings with loose galvanized mild steel slip-on flanges complete with galvanized mild steel bolts, nuts and washers, and neoprene gaskets. Fittings must be A.I.S.I. Type 316



stainless steel butt weld fittings.

Phosphoric acid based fluxes must be used for all welded joints which are to be argon arc TIG welded using Type 316 filler rods, with the welds treated with suitable pickling compound.

WATER TAPS AND VALVES: — Water taps, stopcocks, ball-o-cocks and wheel valves shall be of approved manufacture complying with SANS Specification 226.

Ball valves with brass valve and copper or plastic ball float shall be of approved manufacture complying with SANS Specification 1056. Plastic floats when supplied, must comply with SANS Specification 1006.

Full Bore Teflon Seated Ball Valve shall be of approved manufacture complying with SANS Specification 664. Valves shall be clockwise closing with non-rising, cap-fitted spindles and flanked connections and of the class specified.

Pressure reducing valves shall be of approved manufacture complying with SANS Specification 198.

FIXING OF WATER PIPES: — Galvanized mild steel water piping shall be fixed, unless otherwise described, to walls or ceilings with galvanized malleable iron holderbats (school board pattern), built into walls in 1:3 cement mortar. Pipes shall be fixed to timber work with galvanized mild steel pipe clips screwed on.

Copper and stainless steel water piping shall be fixed, unless otherwise described, to walls or ceilings with brass holderbats (school board pattern) built into walls in 1:3 cement mortar. Pipes shall be fixed to timber work with brass or copper pipe clips screwed on.

Polypropylene / Multilayed Piping - shall be fixed to walls according to manufacturers recommendations.

CONCRETE THRUST AND ANCHOR BLOCKS: — shall be of the sizes required and provided where directed to anchor the water pipelines against the thrust due to hydrostatic pressure. Concrete blocks shall be cast against the undisturbed face of the excavation. Backfilling behind the thrust face of the block will not be permitted.

TESTING OF WATER MAINS: — The whole of the water reticulation shall be subjected to a hydraulic test pressure 1.5 times the maximum working pressure of the pipeline. Testing of pipelines may only commence after the installation of all anchor blocks, valves and fittings have been completed. Testing shall be carried out between installed sluice valves whenever possible. Where this is not possible the ends of the pipes shall be sealed with end caps properly held in place with temporary props.

The tests shall be carried out on lengths not exceeding 300 metres.

The pipeline shall be filled from the lowest end in order to expel the air at the upper end through special taps or through service connections, stand pipes, etc. When full the line shall be allowed to stand for 24 hours and any further accumulated air shall be expelled. The full test pressure shall then be applied and maintained for one hour, during which time the line will be examined for any leaks, movement at anchors and other defects.

Any defective work is to be taken out and replaced at the Contractor's expense and the whole retested until found satisfactory.

The Contractor shall provide all necessary testing apparatus, temporary end caps, plugs, stoppers, special taps and any other materials that may be required, and all labour for carrying out the tests.

EXCAVATIONS FOR PIPE TRENCHES: — Excavations for pipe trenches, gulley traps, manholes, inspection chambers, valve, chamber, soakpits and septic tanks shall be to the

depth and gradients shown on the drawings using sight rails and boning rods and shall include for taking precautions against collapse of sides of excavations, staging, pumping and baling to keep the excavations free from water or mud and for filling in and ramming.

The bottoms of pipe trenches are to be excavated to even falls. The barrel of the pipe, except where it is laid on a sand or concrete bed, must rest on solid ground and hand-holds of sufficient size must be cut under pipe joints to enable the jointing and filleting to be properly performed. Any excavations taken out deeper than required shall be made up to the correct grade with well rammed earth. In intermediate or hard rock excavation and where a bedding is not specified, the trench bottom must be excavated 100mm deeper than required for the grade and be backfilled with well rammed earth.

The Contractor is to notify the Department when the trenches are ready for inspection and approval. Any work put in hand before approval has been given shall, if so required, be replaced with new at the Contractor's expense.

Notwithstanding such approval of the trench bottoms, any excavations which become waterlogged or otherwise spoilt after approval, shall be cleaned out and reformed at the Contractor's expense and to the satisfaction of the Department before any piping or sand or concrete beds are laid.

Depths of excavations as approved shall be checked and recorded by a Departmental Official and the Contractor before excavations are filled in.

For the purpose of any measurement, whatever size may have been excavated, excavations are taken as follows: — Trenches not exceeding 0.75mm deep shall be taken 0.5m wider than the internal diameter of the pipe. This width shall be increased by 75mm for each successive depth of 0,75m to a maximum of 1m wider than the internal diameter of the pipe.

BACKFILLING: — No trench shall be backfilled until the Department is satisfied that the works therein have been satisfactorily completed, tested and are ready for backfilling.

The backfilling around and 300mm above the pipe is to be of approved selected material, imported if necessary, free from rock or stone, carefully packed, watered and lightly rammed equally on either side of the pipe and then filled in above this level with suitable material from the excavations, watered and compacted in layers not exceeding 300mm thick with the top 300mm consolidated to dry density of not less than 95% MOD. A.A.S.H.O. density. Topsoil from the excavation is to be set aside and used in the final layer of backfilling.

Any disturbance of or damage to the pipes during backfilling must be made good by the contractor at his own expense.

All spoil from the excavations for trenches, etc. shall be deposited and levelled on site or carted away as directed. Any subsidence or depressions below the level of the adjacent ground shall be filled in, as and when necessary, until the end of the maintenance period.

SIZES OF PIPES: The diameters stated for galvanized mild steel piping, cast iron piping, vitrified clay piping and asbestos cement pressure piping (C.I.D.) are the nominal internal diameters. The diameters stated for all other pipes are nominal external diameters.

In the case of piping and fitting which are manufactured in imperial diameters, the size nearest the metric equivalent must be used.

RATES FOR PIPES: — Rates for all pipes, gutters, channels, etc. are to include for couplings in running lengths, joints, short lengths and cutting and fixing as required. Rates for mild -steel pipes shall include for all plain sockets and nipples. Where fittings have reduced ends or branches the fittings are described as "reduced" and the largest end or branch has been stated. The Contractor may use equal fittings with reducers or bushings if he so desires, but no claim for extras in this connection will be entertained.

Rates for pipes fixed to walls, soffits of slabs, roof timbers, etc. are to include for all



brackets, holderbats, pipe clips and approved extended hangers where pipes are required to be laid to falls and for plugging and screwing or for cutting and pinning or building in tails of holderbats.

Rates for piping are to include for cleaning down at completion, and in addition, the rate for stainless steel pining is to include for polishing exposed piping, all to the approval of the Department.

RATES FOR CHASES, HOLES ETC .: — are to include for making good to approval. The term "hole" is to include for sleeves where required through concrete work.

FIRE EXTINGUISHERS: — Where specified, carbon dioxide gas type fire extinguishers shall be 2.26kg type, complying with SANS Specification 889 and fixed in position on wall brackets screwed to and including 20mm thick chamfered and oiled wrot hardwood backboard, size 450mm x 100mm screwed to plugs in wall.

Where specified, dry powder type fire extinguishers shall be of 10 litre capacity, complying with SANS Specification 810 and fixed as before described on backboard size 1000mm x 200mm.

FIRE HOSE REELS: — shall be non-swinging rotary fire hose reels, complying with SANS Specification 543, with solid side discs and 25mm waterway at bracket incorporating rotary pressure joint to hose connection at hub and fitted with 25mm screwed malleable iron 'Sanders type A' valve with "S" grade diaphragm, connection for supply pipe with the handwheel clearly marked in red with arrows and the words "OPEN", "OOP".

The reel is to be secured to the wall with and including three steel anchor bolts and fitted with 30m length of 20mm internal diameter best quality reinforced red rubber non-kinkable hose with one end fixed to wheel hub connection and the other end fitted with 20mm chromium plated gunmetal adjustable "Centorium" type nozzle with hose threaded through and including chromium plated hose guide, designed to permit the hose to run out in any direction and the nozzle supported on and including chromium plated bracket fixed to wall.

For ease of removal, a union shall be installed between the valve and the reel.

FIRE HYDRANTS: — shall be of the wheel valve pattern with instantaneous coupling outlets, size 63.5mm or 70mm as stated on the drawings. Hydrants fixed in a horizontal position shall have oblique angle outlets and those fixed in a vertical or inclined position shall have right angle outlets. The materials used in the manufacture of the hydrants shall be as laid down for the manufacture of couplings, branch pipes, etc. in SANS Specification 1128, and the various requirements of instantaneous couplings and dimensions for 70mm outlets shall comply with the requirements for Morris instantaneous pattern couplings.

The valve spindle shall have a minimum diameter of 22mm with swivelling clack at one end fitted with first quality dexine or other approved washer, bedded on to a raised seat not less than 6mm wide, and the other end shall be machined to form a square shank of 15mm minimum thickness and a length corresponding with the thickness of the boss of the handwheel, the portion protruding from the boss shall be threaded and fitted with a washer and nut to hold the handwheel firmly in place. Valve inlet shall be male screwed 80mm Whitworth pipe thread, and outlet shall be fitted with approved India-rubber coupling gasket. The internal diameter of the valve body shall be not less than 95mm in the case of 63.5mm outlets or 100mm in the case of 70mm outlets.

The valve hand wheel shall have an overall diameter of 165mm and the rim shall be of oval cross-section and shall have the words "OPEN" and "OOP" together with direction arrows embossed on the face.

All hexagonal faces shall be machined and all exposed surfaces of the valve and the wheel periphery shall be buffed and polished. Parts of the wheel not polished shall be painted two coats bright red high gloss paint.

The completed hydrant valve shall be guaranteed hydraulically tested by the manufacture to a pressure of 35 bar and shall be badged or stamped accordingly with the manufacturer's



name or symbol and the words "TESTED 35 bar".

16. GLAZING

MATERIALS: — Glass shall conform to the requirements of the relevant current British Standards Specification for the respective materials.

Clear glass shall be float quality glass.

Silvered glass mirror to comply with SANS Specification 1236 Class A.

Toughened safety glass 15 to be "Armourplated" float quality safety glass of the thickness specified and as manufactured by Armourplate Safety Glass (Pty) Ltd. or other approved, and glazed to sashes, etc. in strict accordance with the manufacturer's instructions.

All toughened safety glass is to have the manufacturer's name or motif sand-blasted in one corner of each pane

Laminated safety glass is to be float quality normal strength glass, unless otherwise stated, and of the type specified and as manufactured by Shatterprufe Safety Glass Co. (Pty) Ltd., or other approved, and glazed to sashes, etc. in strict accordance with the manufacturer's instructions.

All laminated safety Glass is to have the manufacturer's name or motif sand-blasted in one corner of each pane.

All glass is to be free from imperfections and is to be left in a thoroughly clean condition on completion.

No glazing is permitted in Patient Treatment area's below 1 (one) meter.

GLAZING: — The glazing and fixing of glass in buildings shall be in accordance with SANS Code of practice 0317.

Glass panes shall have adequate glazing clearance between edges of glass and the rebates.

Putty for glazing shall comply with SANS Specification 680 type 1 for glazing in wood and type 2 for glazing in steel. Putty for glazing in natural finished wood shall be tinted to match the colour of the wood. Putty to be mixed with a hardener to allow for painting within +/- 3 days. Putty for glazing in aluminium windows shall be tinted to match the aluminium or anodised aluminium where required.

All rebates, other than those in natural finished hardwoods, are to be primed before glazing. Glass fixed with glazing beads shall be well bedded in back putty in the rebates.

Putty shall be carefully trimmed and cleaned off with front putty worked to within 3mm of the sight lines.

RATES: — Rates for glass generally shall include for preparing the rebates, etc. all putty, sprigs, clips, etc. as required and all cutting.

Rates for toughened and laminated glass shall include in addition for all necessary spacing and setting blocks in accordance with the manufacturer's requirements.

17. PAINTING

MATERIALS: — Proprietary materials where specified are to be of the brand specified or other approved by the Department.

All primers, emulsion paints, enamels, stains, varnishes, etc. are to comply with the relevant SANS Specification.



Paints, etc. shall be suitable for application on the surfaces to which they are being applied and those used externally shall be of exterior quality or suitable for exterior use.

For any particular work the priming coat and subsequent coats of paint are to be executed with paints from the same manufacturer and in accordance with that manufacturer's instructions.

The materials are to be brought to the site in unopened containers and no adulteration will be permitted, except thinners of a quantity and quality directed by the manufacturer.

The Department shall at all times be permitted to take samples for testing purposes from open containers of any brand of paint being used on the work.

All materials, if and when required by the Department, will be subject to tests by the South African Bureau of Standards, and the cost of such tests, should the material under test not meet the requirements of this specification, shall be borne by the Contractor. Fillers and stoppings are to be suitable for use with the material being filled or stopped and to the approval of the Department.

PREPARATORY WORK: — All new and existing surfaces are to be thoroughly dry and are to be cleaned of all dust, dirt, grease, oil, rust, scale, efflorescence, fungus, loose or flaking material, etc. rubbed down, stopped, filled, knotted and sanded smooth as required in accordance with the paint manufacturer's recommendations and to the approval of the Department prior to the application of paint, etc.

Ceilings are to have nail heads, including those to cornices and cover strips, primed and stopped up as necessary and rubbed down smooth.

Asbestos cement shall be primed with an approved alkali resistant primer before the application of subsequent coats which are not, in themselves, alkali resistant.

Iron, steel and other ferrous metals shall be cleaned in accordance with SANS Code of Practice 064 to remove rust, scale, grease, oil, etc. and the surface brought to a bright metallic condition.

Galvanized iron and zinc shall be cleaned in accordance with SANS Code of Practice 062 to remove the manufacturer's temporary protective coating, white rust, etc.

Other non-ferrous metals shall be thoroughly cleaned to remove all milling oils, temporary protective coatings, etc. and the surface abraded with fine water-paper and white spirit.

Woodwork to be painted shall have all knots and resinous areas treated with an approved knotting, the surface shall then be primed and all holes, etc. stopped and rubbed down smooth,

Woodwork to be oiled, stained, varnished, etc. shall be free of all stains, pencil marks and other surface discolorations and all holes, etc. stopped with tinted stopping and rubbed down smooth.

In preparing existing glazed sashes and sash doors, all loose putty is to be removed, the rebates primed and glass re-sprigged and re-puttied as necessary before the painting is commenced.

Previously distempered or lime washed surfaces to receive any other type of paint, are to have the existing distemper or lime wash completely removed by scraping or wire brushing and the surfaces treated with an approved bonding liquid.

Where existing paint film are in good condition any flaking or bared patches are to be properly feathered into the surrounding paint and spot primed as necessary.



Where existing paint films are in poor condition and require to be removed completely, they are to be removed by means of wire brushing, paint remover, burning off, or other approved method. Paint removers shall be free of wax and caustic substances and shall preferably be of water rinseable type. When burning off paint from wood, care must be taken to avoid charring the wood.

The final state of preparatory work to existing decorated surfaces shall in all cases produce in the finished decorated surfaces a condition similar to new work.

The Contractor will be held responsible for the proper and adequate preparation of the surfaces and any work which fails to meet the manufacturer's recommendations must be made good at the Contractor's expense to the satisfaction of the Department.

APPLICATION OF PAINTS, ETC.: — Painting may be carried out by brush, roller or spray as recommended by the manufacturer and to the approval of the Department. All paints, etc. are to be applied in strict accordance with the manufacturer's instructions. Each coat of paint is to be adequately and permanently keyed onto the previous coat or surface and shall be evenly distributed and continuous and shall dry to a smooth film, free from sags, runs or other imperfections. Each coat of paint is to be of a colour distinctive from previous or succeeding coats.

All painting must be done in accordance with a colour scheme which will be provided by the Department, and rates for painting etc. are to include for all cutting in of contrasting colours and masking as required. No distinction has been made where more than one colour of the same material is required on the walls or ceiling of the same room.

Samples of colours for the final coats are to be prepared in all cases to the approval of the Department and all work must be finished to the approved colours.

Backs of wood door and similar frames an the surfaces of other new or prefixed joinery in contact with brickwork, etc. and built in as the work proceeds, shall be primed or sealed before building in to prevent moisture seeping into the wood from the mortar bedding.

Tongued and grooved and rebated edges of boards in batten doors and other such like inaccessible parts of new joinery shall, before assembly, be primed, or where the joinery is to receive a finish other than paint, be given one coat of such other finishing material.

All new external structural timbers shall be primed before the timbers are fixed in position and shall include all surfaces such as backs of fascias and barge boards.

RATES: — Rates for painting, etc. are to include for all preparatory work, and where spraying is employed, are to include or adequately masking all surrounding areas.

Where diameters of pipes are stated these are the nominal internal diameters, and rates for painting pipes are to include for painting the holderbats, hangers, clips, etc. supporting the pipes.

Rates are to include for providing all necessary dust sheets, covers, etc. taking all necessary precautions to prevent marking the surfaces of joinery, walls, floors, glass, electrical fittings, etc. All surfaces disfigured or otherwise damaged shall be completely renovated or replaced as necessary to the approval of the Department at the Contractor's own expense.

18. ROADWORK

The Contractor is referred to the preambles for "Earthworks" with particular reference to the full description, intent and meaning of the classification for excavations and the preambles for "Concrete, Formwork and Reinforcement"



The construction of the roads is to be carried out by an approved Specialist Sub-Contractor in accordance with the following specifications and all to the approval of the Department.

SUB-GRADE: — All materials placed in the sub-grade layer which is defined as being the 150mm thick layer immediately below the sub-base or the base course (where no sub-base is specified), shall conform to the following specification: —

- (a) Minimum C.B.R. at 93% Mod. A.A.S.H.O. density = 10 %
- (b) Maximum C.B.R. Swell = 1.5 %
- (c) Maximum Plasticity Index if: more than 30% passes the 2mm sieve = 12 less than 30% passes the 2mm sieve = 16

The sub-grade layer in cut areas shall be treated in place either to achieve a uniform standard of compaction or to break up undesirable formations of hard rock.

In the case of materials other than hard rock, treatment in place shall consist of scarifying or otherwise loosening to a depth of 150mm and re-compacting to a density of 93 % Mod. A.A.S.H.O. where directed, with the material stabilised in place before compacting.

In hard rock, treatment in place shall consist of thoroughly loosening to a depth of 450mm by rip in or blasting and then sized by rolling or knapping until the maximum dimension of any spall shall be not more than 300mm.

Compaction of the rock in the sub-grade shall be achieved by spreading and sorting by bulldozer to a reasonable uniform thickness with sufficient fine material added to fill the voids and bind the surface.

Compaction shall be achieved by means of a vibratory roller until the Department is satisfied that the mass is sufficiently dense, to provide a stable sub-grade layer.

Density tests shall be carried out at the minimum rate of one test per every 500m^2 of subgrade area or not more than 50m apart but not less than four tests for smaller areas and shall assess the full layer thickness. The costs of such control tests shall be included in the Contractor's rate for sub-grade treatment. The Department may; at its discretion, arrange for independent check tests to be performed, but the costs of the tests in this instance will be borne by the Administration.

Processing of the material will be measured under the relevant items. An approved total weed killer shall be applied during the formation of the sub-grade. The rate of application shall be in accordance with the manufacturer's specification.

Rates shall include for the supply, delivery, spreading and stabilisation with lime, if required, and compacting and shaping to correct lines and levels.

The lime and method of mixing and watering shall be as described in the specification for stabilisation.

SUB-BASE: — All material placed in the sub-base layer, which is defined as being that layer of 150mm thickness immediately below the base course layer, shall conform to the following specification: —

	Unstabilised	Stabilised
Minimum C.B.R. at 95 % Mod. A.A.S.H.O. density	70%	50%
Minimum C.B.R. Swell	0, 5%	0, 5%

Maximum Plasticity Index	10		10
Minimum Liquid Limit	35%		35%
Maximum size of aggregate	63mm		63mm
Material passing the No. 75 micrometer sieve shall not exceed		25 %	

95 % Mod. A.A.S.H.O.

Combined coarse and fine sand density fractions shall exceed 35 % of the soil mortar

Minimum relative compaction in place

Unless otherwise specified, the responsibility for obtaining material that conforms to the above specification rests with the Contractor who will be required to perform his own tests to prove compliance, and to submit samples to the Department before the material is delivered on site. Further control tests will be required by the Department during the placing and compaction of the material, the locations of which will be selected at random.

Should the Contractor wish to use material from the site excavations, he shall first obtain the approval of the Department. His rates shall in this case include for the selection and stockpiling.

Density tests shall be carried out at the minimum rate as specified for the sub-grade layer.

The layer shall be finished off to present a uniform texture and tightly bonded surface.

Rates shall include for the supply, delivery, spreading and stabilisation with lime, if required, and compacting and shaping to correct lines and levels.

The lime and method of mixing and watering shall be as described in the specification for stabilisation.

The finished surface shall be within 20mm of the design level. The finished width shall not be less than the design width. The average of five thickness tests at the rate of one test for every 200m² of surface shall not be less than 150mm and at any point not less than 130mm.

The surface finish when measured under a 3m straight edge shall have no slacks or bumps greater than 5mm.

The cost of the density control tests shall be included in the Contractor's rate for sub-base construction. The Department, at his discretion, may arrange for independent check tests to be conducted, and the costs in these instances will be borne by the Administration.

STABILISATION: — The stabilisation agent shall be slaked lime of the calcium type conforming to the requirements of SANS Specification 824.

The rate of application shall conform to the design rate and all materials to be stabilised shall be approved by the Department before processing.

The material shall be spread in a uniformly thick loose layer over the full area and thoroughly dried by scarifying or blading with a grader to ensure exposure to the air of all particles and to ensure thorough mixing to obtain a uniform grading of the material. When the material has been approved as being ready for stabilising it shall be lightly rolled to facilitate the spreading of the lime. The lime shall be evenly applied to the surface, preferably by mechanical spreader, at the specified rate and thoroughly mixed by rotavator or disc harrow until a uniform integrated mixture of uniform colour is obtained over the full depth of the layer.



Before mixing is commenced, the Contractor shall satisfy the Department that the lime has been applied at the specified rate.

Immediately after the lime has been mixed in, water shall be added in small increments by suitable watering equipment and mixed into the layer until the required water content has been obtained which shall not exceed the Mod. A.A.S.H.O. optimum plus 2%:

The efficiency of the spreading and mixing shall be measured by Lime Determination Test according to A.S.T.M.D. Test Number 3155/1973 or the California Test Method No. 338-B July 1996. Only where the result from every 15 tests at locations selected by the Department indicate that more than 90 % of the layer has a time content exceeding 60 % of the nominal lime content will the work be accepted, provided that the coefficient of variation shall not be greater than 25%.

The test positions shall be spaced at one for every 100m² of surface area, but shall not be spaced, greater than 20m apart

BASE COURSE: — When the sub-grade has been prepared and approved, the base course, consisting of one of the following, shall be formed to the compacted thickness specified.

Crusher Run Base Course

Crusher-run base course shall be fresh dolerite, hard blue tillite, quartzite, fresh granite, fresh basalt or other stone which meets the following specifications.

TABLE F: CRUSHER RUN BASE COURSE: STONE SPECIFICATIONS

Sieve Size	% Passing	
37.5mm	100	
26.5mm	82 - 95	
19.1mm	70 - 85	
13.2mm	58 - 75	
4.75mm	34 - 55	
Sieve Size	% Passing	
2.00mm	22 - 40	
0.425mm	10 - 25	
0.075mm	5 - 12	

Alnimum C.B.R. @ 98% Mod. A.A.S.H.O. density Maximum C.B.R. Swell Maximum Liquid Limit		80% 0, 5 % 25
Maximum Plasticity Index		4
Maximum Plasticity Index	2	
Maximum Linear Shrinkage	_	20
Minimum Sand Equivalent Value		30
Maximum Flakiness Index	35	

Maximum Flakiness Index The soundness of the aggregate shall be such that after 5 cycles using Magnesium



Sulphate it shall not show a loss of more than 15% by weight.

The maximum Aggregate Crushing Value should not exceed 30.

The moisture content used for field compaction shall not exceed the Mod. A.A.S.H.O. optimum plus 2 %.

Natural Ground Base Course

Natural ground base course shall be approved stone which meets either of the following specifications

Natural Gravel (Unstabilised) Minimum C.B.R. at 98% Mod. A.A.S.H.O.	80 %
Minimum C.B.R. Swell	0.5 %
Group Index value	0
Maximum Plasticity Index	4
Maximum Liquid Limit	35
Maximum Linear Shrinkage	2
Minimum Sand Equivalent Value	30
Maximum size of particle	53mm

Material passing No. 75 micrometer sieve shall not exceed 25 %

The combined coarse sand and coarse/fine sand fraction shall not exceed 35 % of the soil mortar

Natural Gravel (Stabilised with Lime)

Lime must comply with SANS Specification 824 Minimum	n C. B .R.		
at 98% Mod. A.A.S.H.O. density,	160	140	120
provided that the minimum C.B.R. before stabilising, at			
95 % Mod. A.A.S.H.O. density	30	45	60
Maximum C.B.R. S well			0, 5%
Maximum Plasticity Index	4		
Maximum particle size	2/3 laye	er thickness	
Maximum percentage passing No. 75 micrometer sieve	25		
Grading Modules	1, 5		

The responsibility for obtaining suitable base course material complying with the above rests with the Contractor, unless otherwise specified, and the provisions for sub-base material in regard to tests, etc. to prove compliance with the specification shall apply to the base course.

During construction, the base course shall be evenly distributed over the sub-grade. The stone shall then be rolled with a 4 to 5 tonne roller or equal unless otherwise instructed. After a few passes of the roller the surface shall be checked for shape camber and levels and all depressions filled in. Rolling and trimming shall continue until the surface is true to required levels and falls.

Minimum density in place after compaction shall be 98% Mod. A.A.S.H.O. density.

CHIP AND SPRAY SURFACING

Binders

One of the following may be used: —

M.C. 3000 Bitumen to SANS Specification 308 (150/200 Pen.)

M.C. 800 Bitumen to SANS Specification 308 (150/200 Pen.)



RTH 45 / 50 Tar to SANS Specification 748 Spray-grade 60% emulsion where approved or specified by the Department. If emulsion is used then the specified application rates shall be increased to give the required net bitumen content.

Cover Aggregate

All Cover aggregate used in the surface treatment shall be washed 13.2mm nominal sized crusher stone in accordance with SANS Specification 647.

Aggregate Crushing Value shall not exceed 15.

Binder shall be applied after the prime coat has dried completely and all tackiness has vanished.

The binder is to be applied by means of a distributor at a rate of 1.1 litre/m2 followed immediately afterwards by the spreading of a cover aggregate of 13.2mm stone at the rate of $125m^2/m^3$. The aggregate is to be spread by means of an approved chip spreader; band spreading will only be permitted in those areas inaccessible to the spreader. The aggregate is to be rolled immediately with two passes of a pneumatic tyred roller. When the binder has set the surface shall be drag-broomed twice in each direction and then rolled again with four passes of the roller during the heat of the day or until the aggregate is firmly keyed into a tight surface.

DOUBLE SEAL COAT WITH BLACK TOP SURFACING: — The prime and first seal coat shall be applied as previously specified.

After the first seal coat has been drag-broomed and rolled as previously described, the binder shall be applied to the surface at a rate of 0.8 litre/in 2 followed immediately by the spreading of 6.7mm stone chips at the rate of 150m²/m³. This stone aggregate shall then be drag-broomed and rolled as previously described.

A seal spray having a net bitumen content of 0.7 litre/in² shall then be applied to the surface when this coat has dried completely, and shall be rolled to firmly bed any loose aggregate.

If the surface is to be opened early to traffic, it shall be covered very lightly with sand or crusher dust distributed evenly with a hessian drag and back rolled with wet wheels before opening to traffic.

SLURRY SEAL SURFACING: — The aggregate for slurry seal shall conform to the following grading: --

Sieve Size (mm)	Percentage Passing
4, 75	100
2, 36	90—100
1, 18	6595
0, 600	42—72
0, 300	23 —4 8
0,150	10—27
0, 075	5—12
w,	

Slurry sand shall be crusher sand with a minimum sand equivalent of 35.

Binder — Stable grade emulsion (60%) Anionic to SANS Specification 309 Cationic to SANS Specification 548

Consistency of the slurry shall consist of 90% crusher sand, cement filler not less than 1% and net binder content of not less than 9% by weight. Water to be added as required. As a guide, approximately 300 litres of emulsion and 160 litres of water are required per cubic metre of slurry.



The slurry shall be machine mixed and wherever possible applied by means of a spreader box. The rate of application shall be 170m²/m³. The slurry shall be of a creamy, homogeneous mixture, free of lumps, and if the mixture shows signs of breaking before application to the surface it shall be discarded.

After the first seal has been approved by the Department, but before the application of the slurry, a fog spray comprising of a solution of 1 part emulsion to 3 parts water shall be applied at a rate of 0.8 litre/m² to cover the aggregate. The application of the slurry may commence when the fog spray has been applied to assist with the spread of the slurry and to smooth out squeegee marks the slurry shall, immediately after being applied and before it has broken, be smoothed by a damp hessian drag either attached to the spreader box or pulled over by hand.

After the slurry has set it shall be covered by two passes of a pneumatic-tyred roller during the heat of the day.

The permissible variation in the application of the slurry shall not vary from the specified rate by more than 10%.

PREMIX TARMACADAM SURFACING

Prime Coat

When the base course is complete and dry it shall be cleaned of all loose material and be given a prime coat of one of the following primers: — M.C. cut-back bitumen.

Tar Primer R.T.H. 3/P.

Emulsion Primer (60%).

The rate of application of the primer shall be within the range 0.65—1.0 litre/m², the actual rate to be determined by test and observation on site. Where emulsion primer is used, the application rate shall be increased to give the required nett bitumen content.

Hand spraying shall be used only in those areas inaccessible to mechanical distributors. Before spraying is commenced, the surface shall be lightly watered to settle dust.

Single Coat Premix Tarmacadam

When the prime coat has dried the single coat premix wearing course, of the compacted thickness specified, shall be constructed.

The wearing course shall be Type A (Hot Mix), unless otherwise specified or approved by the Department, and shall conform to the following specification: —

TABLE G: SINGLE COAT PRE-MIX WEARING COURSE: SPECIFICATIONS

	Α	В	С
Screen Size	Hot	Hot	(Kerbs)
mm	Mix	Mix	(110.50)



			······································	
Aggregate Grading Per Cent Passing	26.5 19.0 13.2 9.5 6.7 4.75 2.36 1.18 0.6 0.3 0.15 0.075	100 100 80 - 100 70 - 90 - 50 - 70 35 - 50 27 - 40 19 - 30 13 - 23 8 - 16 4 - 10	- 100 80 - 95 60 - 75 45 - 60 28 - 42 18 - 30 7 - 20 2 - 10 0 - 5 0 - 4	- 100 90 - 100 65 - 75 52 - 62 50 - 60 45 - 55 30 - 40 9 - 19 4 - 8
Grade Binder		60 / 70	Emulsion	60 / 70
Nominal Nett Binder Content		5.5 % +/- 0.38	4.75 % +/- 0.3	5.5 % +/- 0.3

Penetration grades to comply with SANS Specification 307.

Cut-back bitumen to comply with SANS Specification 308.

Maximum heating temperature of bitumen 170°C.

Delivery temperature at the paver for hot mixes 130—160°C.

For every 500m² of area paved the Contractor shall produce an extraction test result from a sample taken during laying operations showing grading and bitumen content of the premix carpet. The test as specified or any further tests to prove compliance with the specification shall be at the Contractor's expense.

In order that the stone and binder shall be properly mixed, this operation must be carried out in a pug-mill mixer or by hand with shovels and wheelbarrows or on metal plates, in which case the binder must be added in the correct proportions in small quantities. Mixing shall continue until the aggregate is uniformly coated with the binder. Bituminous surfacing shall not be carried out in rainy weather nor when atmospheric shade temperature is below 10°C. Immediately after mixing, the surfacing materials must be spread and rolled on the same day. Spreading shall be done evenly over the base to ensure a consolidated thickness as specified and shall be performed by means of a mechanical spreader or by a drag spreader, or by hand, using rakes and screeds.

Where hand spreading is used, the premix must not be dumped on the base, but taken from the boards on barrows by shovel and then evenly distributed over the base. Hand raking must be reduced to a minimum to avoid segregation of aggregate. Rolling shall commence as soon as the binder has set sufficiently and, unless otherwise instructed, this shall be done with a 4 to 5 tonne roller or equal.

Places inaccessible to a roller may be compacted by means of 12kg tampers. The surface shall be rolled true to line and level without slacks or irregularities.

After three days the rolling shall be repeated during the hottest part of the day and a light application of fines may be added during the final rolling.

Premix Tarmacadam Kerb

Premix kerbs are to be Type C as specified above and constructed to give the following compacted size: --

> Width at top Width at base

125mm 230mm



Height 150mm

PRE-CAST CONCRETE PAVING BLOCKS: — shall be of the type, class and thickness specified, of approved colour and shall comply with SANS Specification 1058. Paving blocks which fail to meet these requirements must immediately be removed from the site and replaced at the Contractor's expense to the satisfaction of the Department.

Paving blocks shall be one of the following types as specified: —

Type S-A: — allows geometrical interlock between all vertical faces of adjacent blocks,

Type S-B: — allows geometrical interlock between some vertical faces of adjacent blocks.

Type S-C: — allows no geometrical interlock between vertical faces at adjacent blocks.

Paving blocks shall be one of the following classes as specified: —

Class 25: — average compression strength of at least 25 MPa.

Class 35: — average compression strength of at least 35 MPa.

Paving blocks are to be laid to approved patterns as specified and in accordance with the relevant clauses (excluding Clause 8) of SANS Specification 1200 MJ on and including a sand bed of the compacted thickness specified. After laying, the paving blocks are to be compacted by means of a vibrating plate compactor with the joints filled in, after compaction, by sweeping in jointing sand.

Sand for bedding shall conform to the following grading: —

Sieve size (mm)	Percentage Passing
9, 52	100
4, 75	95-100
2, 36	80-100
1, 18	50-85
0, 60	25-60
0, 30	10-30
0, 15	5-15
0,075	0-10

Sand for jointing shall pass a 1.18mm sieve and shall contain 10-50% of material that passes a 0,075mm sieve.

Spaces constituting less than 25% of a full block unit and of 25mm minimum dimension at perimeter edges of pavings against kerbs, buildings, inspection chambers, etc. are to be filled with Class B concrete trowelled to a smooth even surface to match paving blocks.

Rates for paving block pavings are to include for all straight cutting and waste, all half blocks at straight edges, filling with concrete as described, fitting, protecting from injury and cleaning down at completion.

KERBS

Generally

The kerbs are to be laid before the base course is commenced to the lines and positions as shown on the drawings. The Contractor is to allow sufficient time for the mortar bedding and joints to set and is to take all necessary precautions to maintain the line of the kerbs especially while rolling the base course and surfacing, as no claims in this connection will be considered.

Rates for kerbs are to include for necessary excavation, well consolidated bottom under kerbs and for filling and ramming to secure the kerbs in position.

Pre-cast Concrete Kerbs

Pre-cast concrete mountable kerbs as SANS Fig8 are to be of concrete Class 20 (20 MPa) and of the sizes described in the items, cast generally in 1m lengths, and finished smooth off the mould on top edge and both sides, with angles rounded, and rates are to include for all necessary formwork and moulds. The kerbs are to be bedded on and including a mat of



1:3 cement mortar, and the abutting ends of the kerbs are to be fully jointed in a similar mortar and pointed with a keyed-in joint on top edge and exposed sides.

Brick on edge kerbs

Brick on edge kerbs are to be of extra hard burnt bricks of the colour specified. The kerbs are to project 10mm above the finished tarmacadam level and are to be bedded on a mat of 1:4 cement mortar, and the abutting ends of bricks are to be fully jointed in a similar mortar and pointed with a keyed-in joint on top and exposed sides.

FENCING AND GATES 19.

GENERALLY: — The Department shall be responsible for the initial location and exposure of all necessary boundary beacons and their indication to the Contractor at the site The Contractor shall be responsible for subsequently ensuring that these beacons remain undisturbed and that the fencing is correctly aligned between boundary beacons. Should, during setting out of the further boundary beacons be uncovered or located and reasonable doubt arise regarding the correct alignment of fencing, then the Contractor shall be responsible for immediately notifying the Department, in writing, of such doubt, in order that the setting out may be checked and rectified, if necessary.

All bushes, trees, old fencing, rocks, debris, long grass and other obstructions shall be removed from the fencing line to produce a clear even strip 500mm wide on either side.

Trees, rocks or other items of horticultural or archaeological interest that are not to be removed will be indicated by the Department.

Straining Posts: - shall be erected at ends, corners and intermediately at not exceeding 30m centres with standards or intermediate posts erected between posts at not exceeding 3m centres.

Where fences are erected directly over boundaries, corner beacons shall be preserved by splaying the corner by planting two straining posts, each with one stay, 1 m from the

Security fences (i.e. fences with projecting overhangs if specified) shall be sited 350 mm back from the boundary line so that the end of the overhang is exactly on the boundary line.

SECURITY FENCING:

2.3m High security fencing shall consist of: -

1) Straining and Intermediate Posts (2.9mtr long).
2) Stays (2.6mtr long).

3) Welded mesh fencing (1.8mtr high).

4) Razor wire.

5) Concrete ground beam.

6) Tubular steel gate posts (when specified).

Straining and corner posts shall be 150mm ø x 3mm wall thickness steel tubing, in lengths as specified, with upper end capped and 3mm thick x 300mm x 300mm footplate welded to base. The whole shall be hot dipped galvanized. 80mm diameter stays x 3mm wall thickness shall be secured to posts with galvanised bolts. Straining posts to be positioned at maximum 30mtr c/c. Bottom of posts bedded in concrete to be painted with bitumen paint prior to erection. Where holes have to be drilled on site, drilling shall be cold galvanized before corrosion sets in.

Intermediate posts shall be 2.9mtr long x 100mm x 100mm square pre-stressed, precast concrete posts with top end splayed, spaced at maximum 3mtr apart. Stays for posts shall be prestressed reinforced concrete members of 75mm x 75mm x 2.6mtr long, splayed at the top end, with a 10mm ø x 50mm long galvanized steel pin attached to fit into a drilled hole in the upright and bonded to posts with approved epoxy.

Fence shall comprise of galvanized rectangular welded mesh fencing 1,80mtr high x 3.15mm ø x 25mm x 50mm rectangles fixed to 8 gauge or 3.15mm diameter - as



specified - hardened galvanized steel straining wires x 5, spaced vertically at 450mm ϕ . Welded mesh shall be secured to straining wires with 2mm ϕ galvanized tying wire spaced at a maximum of 250mm between ties. Fencing overlap to be a minimum of 150mm.

Straining wires shall be fixed to posts with doubled strands of 2mm ø galvanized tying wire, pulled tight around posts and wound tightly around the straining wires.

Coils of 500mm ø galvanized flat wrap razor wire shall be fixed vertically above the welded mesh to a height of 450mm above the top of the welded mesh. Razor wire shall be supported on and fixed to three strands of galvanized double strand barbed wire. Barbed wire shall be fixed to the posts in the same manner as the straining wires.

Razor wire shall be fixed to the barbed wire at every intersection and laced to the concrete posts with galvanized tying wire.

A 250mm wide x 150mm minimum depth concrete ground beam of 15mpa strength shall be excavated for and cast along the entire length of the fence. Shuttering for the ground beam sides shall be provided as required. Finished level of the ground beam shall be 50mm above final ground level at the highest point, finished in a straight line both vertically and horizontally. 75mm of the welded mesh fencing and the bottom straining wire shall be embedded in this ground beam to secure the lower fence line. The top of the concrete beam shall be shaped to allow water to run off the top of the beam to prevent water collecting and standing on top of the beam.

At any change in direction of the fence line, two 150mm \emptyset x 3mm wall thickness straining posts shall be erected with bottom ends embedded in a common concrete base with each post stayed separately.

Concrete bases for posts shall be Class B (1:3:5-19mm stone) size 400 x 400 x 500mm deep, unless otherwise specified, with tops of bases 100mm below ground level.

When required, gateposts shall be supplied in steel tubing complying with CKS 82, 150mm ø x 5mm wall thickness, in lengths as specified, with upper end capped with 1.6mm thick pressed mild steel domed cap welded on and 3mm thick x 300mm x 300mm footplate welded to base. Gateposts are to be drilled and fitted with mild steel ferrules welded into position to receive 20 mm ø mild steel hinges. Threaded 12 mm ø studs or approved stay collars are to be fixed on to the posts to locate and secure the top ends of stays. The whole shall be hot dipped galvanized. Where holes for the threading and fixing of straining wires are required, holes shall be drilled on site and cold galvanized on completion.

Stays shall have the top end flattened, bent as required, holed 12 mm ø for bolting to post and the whole hot dip galvanized.

Mild steel tubing for gate components shall comply with SANS Specification 657 Part 1. The diameters specified are the nominal external diameter of the tubing.

Straining wire: - shall be as specified, or either Type 1 galvanized wire of 3,15 mm diameter or Type 2 PVC coated galvanised wire with 3, 15 mm diameter core wire PVC coated to an overall diameter of 3,95 mm. Stainless steel straining wire when specified shall be 2,50 mm diameter A.I.S.I. Type 304 stainless steel, strained between posts and tied to same at terminal ends by turning each wire twice around the post and tying off by twisting it a minimum of three turns around the strained wire.

Binding or Tying wire: - shall be as specified, either Type 1 galvanised wire of 2 mm diameter or Type 2 PVC coated galvanised wire with 2 mm diameter core wire PVC coated to an overall diameter of 2, 80 mm.

Galvanized barbed fencing wire: - shall consist of two strands of 1, 60 mm diameter high tensile steel wire twisted together with barbs at 125 mm centres and each row of barbed wire shall be strained between posts and tied to same at ends by turning each wire around the post and tying off by twisting it a minimum of three turns around the strained wire.

Galvanising: - shall comply with SANS Specification 763 and all items of posts, stays, gate



framing, etc., described as galvanised shall be hot dipped galvanised after fabrication with Class A galvanising with all internal and external surfaces fully coated.

GATES: — Generally single gates and double gates shall be of the sizes stated and formed with mild steel tubular framing all round, covered with chain link wire mesh of the type specified laced to framing. Tubular framing to gates shall be mitred and welded at corners and, at all other intersections, the tubular framing shall be scribed and welded together with all welds ground smooth.

Preferred gate hinges are Bullet Type or through pin type hinges.

Where gates are to be hung on precast concrete posts, hinges shall be fixed to and including mild steel clamps, each formed of two 50 x 5 mm mild steel plates 200 mm long, twice holed for and bolted on opposite sides of post with two 10 mm ø x 140 mm galvanized mild steel hex-head bolts and with each plate holed to receive 20 mm ø gate hinge.

Each single gate and one leaf of each double gate shall be fitted with gate latch formed of 25 x 6 mm mild steel bracket, 550 mm girth, twice bent to U-shape with centre section 150 mm high and with ends scribed and welded to tubular stile of gate. A locking bar formed of 25 x 6 mm mild steel plate, 100 mm long, twice holed 13 mm diameter for shackle of padlock and for pad bolt, shall be welded to inside of bracket. The sliding pad bolt shall be formed of 12 mm ø mild steel rod, 220 mm long, with 25 x 6 mm mild steel flat bar 60 mm long welded on at one end and holed 13 mm diameter for shackle of padlock. The stile of the gate and the locking post or locking stile of the double gate shall be holed for and fitted with mild steel ferrule welded in to receive pad bolt. In addition, fittings to each leaf of double gate shall comprise 50 x 6 mm mild steel locking bar, 80 mm long, holed 20 mm ø for shackle of padlock and welded to locking stile of gate and drop bolt formed of 16 mm diameter mild steel rod, 575 mm girth, once bent to L-shape, fitted through and including 20 mm internal diameter mild steel sleeve welded to gate at bottom corner, with 12 mm diameter mild steel peg stay 25 mm long welded on to gate frame.

A concrete gate stop block size 230 x 230 x 230 mm deep with two 20 mm internal diameter mild steel sockets, each 75 mm long, cast into top shall be embedded in the road surface between each pair of double gates in the closed position. A similar gate stop block but with one socket shall be embedded in the road surface to each leaf of double gate in the open position.

Each single or double gate shall be fitted with an approved 51 mm brass padlock with hardened steel shackle and two keys.

Gates for 1, 20 m high fencing

Single gates shall be size 1,00 x 1,20 m high, each hung on hinges as stated above and formed of 32 mm diameter x 2 mm wall thickness mild steel tubular framing all round. Each gate shall be fitted with locking pad bolt with brass padlock.

Double gates shall be in two equal leaves with each leaf size 2.25 x 1, 20 m high, hung on hinges as stated above, formed of 38 mm diameter x 2 mm wall thickness mild steel tubular framing all round with two 38 mm diameter x 2 mm wall thickness mild steel tubular braces welded on between bottom corners and centre of top rail of each leaf. Each pair of double gates shall be fitted with locking pad-bolt, locking bars with brass padlock, drop bolts and concrete gate stop blocks as specified above.

Gates for 1, 50 m high fencing

Single gates shall be size 1, 00 x 1, 50 m high as described for gates for 1, 20 m high fencing but with each stile of gate extended 330 mm above top rail and braced between top rail and top of extension arm with 32 mm diameter x 2 mm wall thickness mild steel diagonal brace welded on and hung on hinges as stated above. Two rows of galvanised barbed wire, spaced 150 mm apart, shall be strained and tied to the extension arms.

Double gates shall be in two equal leaves with each leaf size 2, 25 x 1.50 m high with each hung on hinges as stated above, all as described for double gates for 1, 20 m high fencing but with each stile of each leaf extended 3 mm above top rail and braced between top rail and top of extension arm with 38 mm diameter x 2 mm wall thickness mild steel diagonal brace welded on. A vertical extension arm 330 mm high - formed of 38 mm diameter x 2 mm wall thickness mild steel tube - shall be welded on above centre of top rail. Two rows of galvanised barbed wire, spaced 150 mm apart, shall be strained and tied to extension arms.



Gates for 3, 00 m high fencing

Single gates shall be size 1,00 x 1,50 m high, hung on hinges as stated above and formed of 38 mm diameter x 2 mm wall thickness mild steel tubular framing all round with 38 mm diameter x 2 mm wall thickness mild steel horizontal centre rail. Each gate shall be fitted with locking pad bolt with brass padlock.

Chain link wire mesh fencing shall be carried over and above the top of the gate as previously described for fencing.

Double gates shall be in two equal leaves with each leaf size 2, 25.x 3, 00 m high, each hung each hung on hinges as stated above, and formed of 51 mm diameter x 2 mm wall thickness mild steel tubular framing all round with two 51 mm diameter x 2 mm wall thickness mild steel tubular braces welded on between bottom corners and centre of top rail of each leaf. Each pair of double gates shall be fitted with locking pad bolt, locking bars with brass padlock, drop bolts and gate stop blocks.

Gates for 1, 8 m high security fencing:

Single gates shall be size $1,00 \times 1,80 \text{ m}$ high, hung on hinges as stated above and formed of 38 mm diameter x 2 mm wall thickness mild steel tubular framing all round with 38 mm diameter x 2 mm wall thickness mild steel horizontal centre rail. Each gate shall be fitted with locking pad bolt with brass padlock.

Single gates shall be hung on mild steel tubular gate posts with cranked overhang when specified and the galvanised barbed wire overhang shall be carried over above the gate as previously described.

Double gates shall be in two equal leaves with each leaf size 2, 25 x 1, 80 m high, each hung on hinges as stated above and formed of 51 mm diameter x 2 mm wall thickness mild steel tubular framing all round with two 51 mm diameter x 2 mm wall thickness mild steel tubular braces welded on between bottom corners and centre of top rail of each leaf. The stiles of each gate shall be extended 450 mm high above the top rail and braced between top rail and top of extension arm with 51 mm diameter x 2 mm wall thickness mild steel diagonal brace welded on. A vertical extension arm 450 mm high formed of 51 mm diameter x 2 mm wall thickness mild steel tube shall be welded on above centre of top rail. Three rows of galvanised barbed wire, spaced 150 mm apart, shall be strained and tied to extension arm. Each pair of double gates shall be fitted with locking pad bolt, locking bars with brass padlock, drop bolts and gate stop blocks.

Double gates shall be hung on posts without cranked overhang but with the posts extended 450 mm high above top of chain link wire mesh fencing to receive continuation of barbed wire and razor wire.

Gates for 2, 40 m high security fencing

Single gates shall be of size 1, 00 x 2, 00 m high, all as described for gates for 1, 80 m high security fencing.

Chain link wire mesh fencing shall be carried over above the top of the gate to an overall height of 2, 40 m with the razor wire carried across between the gateposts.

Double sates shall be in two equal leaves, with each leaf 2, 25 x 2, 40 m high, all as described for double gates in 1, 80 m high security fencing.

Double gates shall be hung on posts without cranked overhang but with the posts extended 450 mm high above top of chain link wire mesh fencing to receive continuation of razor wire.



SUBMISSIONS FOR PREFABRICATED TIMBER ROOF TRUSSES

Letter Ref. TR 1

I / We hereby undertake to be will satisfy myself / ourselves design.	e responsible for the design of the total timber roof co s that the fabrication and erection is in accordance	onstruction and with my / our
Project:		
Part(s):		
NAME	OF	FIRM:
SIGNATURE:	QUALIFICATION:	
DATE:		
Letter Ref. TR 2 I / We am/are satisfied that to completed in conformity with reference.	the fabrication and erection of the total roof construmy / our design.	ıction has been
Project:		
Part(s):		
NAME	OF	FIRM:
SIGNATURE:	QUALIFICATION:	
DATE:		



SUPPLEMENTARY PREAMBLES

The following Supplementary Preambles are to be read in conjunction with the "Standard Preambles to all Trades" included here before and are to apply to this Contract.

Where these "Supplementary Preambles" are at variance with the "Standard Preambles to all Trades" referred to above, such variances are to take precedence and are to apply to this Contract.

1. ALTERATIONS

All Notes, Preambles, etc. applicable for the various trades in the Bills of Quantities, will apply equally to the trades in this Bill.

Tenderers are advised to visit the site and satisfy themselves as to the nature and extent of the work to be done, and also to examine the condition of the existing building.

Tenderers are advised that all materials from the pulling down (except where described to be re-used or handed over to the Department) will become the property of the Contractor, and all these materials, together with all rubbish and debris, must be immediately carted away, and the site left clean and unencumbered. Materials, etc. which are described to be handed over to the Department are to be carefully dismantled where necessary, and neatly stacked where directed on site. Items described as removed shall be removed from site.

Credit for the value of the materials from the pulling down may be allowed for on the Final Summary page.

Prior to the removal of any timbers from the site, they are to be inspected by the Government Entomologist as laid down in Section 32 of the Government Forest and Veld Conservation Act of 1941 (Act 13 of 1941) as amended. If any of the timbers are infested with wood destroying agencies, they are to be disposed of in the manner prescribed by the Government Entomologist.

The Contractor is to give ample notice to the Department and Local Authorities regarding any disconnections necessary prior to the removal or interruption of electric light or telephone cables, water and sanitary services, etc.

Tenderers are advised that adjacent sections of this building will be occupied during the building operations, and the Contractor is required to carry out the work with as little noise, dust and disturbance as possible. Undisturbed access is to be given to patients, staff and visitors.

The Contractor is advised to check all dimensions affecting the existing building as he will be held solely responsible for all new work being of the correct size. All sizes stated are approximate and under no circumstances will claims be entertained should actual sizes of existing items on site vary marginally from the sizes stated in this document.

The Contractor will be held solely responsible for any damage to persons, property, and equipment and for the safety of the structure throughout the whole of the Contract, and must make good at his own expense any damage that may occur.

The Contractor must obey the instructions of the Department in carrying out any portion of the work which in his opinion requires expediting, and the Contractor shall give priority to such work as and when directed.

In taking down and removing existing work, the utmost care is to be observed to avoid any structural or other damage to the remaining portions of the building. The Contractor must also protect all work not removed, such as walls, floors, doors, windows or joinery, loose and fixed fittings and electrical equipment, appliances, etc. from damage during the progress on the works and provide all necessary materials in so doing.



Special care is to be taken not to interfere with any electric light, bell, power or telephone wires and fittings that may be encountered on site. New work to the existing electrical, airconditioning, gas and telephone installations, etc. is included elsewhere in this document.

The Contractor must take the exigencles of the Hospital Service into consideration. Liaison is to be carried out through the offices of the Regional Engineer, with referrals to the Director: Physical Facilities Management for a final decision. No instructions may be received by the Contractor from the Hospital Authorities and all instructions are to be given by the Chief Department in writing before they are put in hand.

2. CONCRETE, FORM WORK AND REINFORCEMENT

Cement is to comply with:

SANS ENV 197 (1 to 2)

SANS ENV 413 (1 to 2)

SANS ENV 196 (1 to 7) SANS ENV 196 (21)

as applicable, and replaces the following SANS Specifications in the Standard Preambles:

SANS 471 Portland cement (ordinary, rapid hardening and sulphate resisting)

SANS 626 Portland blast furnace cement.

SANS 831 Portland cement 15 (ordinary and rapid hardening)

3. MASONRY

Masonry is to comply with SANS Code of Practice 0249 and 0164 as applicable.

4. ROOF COVERINGS, ETC.

The installation of roof coverings and side claddings is to comply with SANS Code of Practice 0237 as applicable.

5. CARPENTRY AND JOINERY

Note:

All timber must be treated in terms of SANS Code of Practice 05 for GYMNOSPERMAE including all SA Pine species and ANGIOSPERMAE including all Eucalyptus species but excluding laminated timber.

It is now a compulsory requirement to use only treated timber in buildings. The treatment shall comply with SANS 457, 753, 754 or 1288 as relevant.

Reference must also be made to the appropriate Standard Preambles and SANS requirements for items not covered by these joinery preambles, etc. i.e. ironmongery, aluminium, glazing, paintwork, etc.

Where items are described as "plugged and screwed", they are to include for plugging and screwing to new or existing brickwork or concrete, with heads of screws sunk and pelleted.

Sawn softwood timber: General, Stress Graded, Industrial, Brandering and Battens is to comply with SANS 1783 Parts 1 to 4 as applicable.

All hardwood is to be dark red Meranti, even in grain and colour selected for "Standard and Better" quality, from Malaysia, with a minimum density of 550 kg per cubic metre at moisture content of 12%, and is to comply with SANS 1099 as applicable.

Hardboard is, unless otherwise described; to be 3mm un-tempered hardboard for floor units and 6mm tempered hardboard for wall units.



Melamine faced moisture resistant V313 chipboard can be used when specified.

Materials generally are to comply with the following specifications and requirements as applicable:

TABLE H: CARPENTRY AND JOINERY: SANS SPECIFICATIONS

MATERIAL	SANS SPECIFICATION	GRADE OR CLASS
Softwood structural timber	1783	Parts 1, 2, 3, 4
Softwood engineering timber	1783	Parts 1, 2, 3, 4
Softwood studs for timber frames in	1783	Parts 1, 2, 3, 4
building		
Softwood brandering and battens	1783	Parts 1, 2, 3, 4
Softwood joinery timber	1783	Parts 1, 2, 3, 4
Softwood flooring boards	629	Flooring Grade
Hardwood joinery timber	1099	Heavy flooring board
Hardwood strip flooring	281	Knotty grade
Wooden ceiling and panelling boards	1039	As specified
Laminated timber (glulam)	1460	As specified
Gypsum, plasterboard	266	As specified
Wood fibreboard	540	As specified
Wood wool panels (cement bonded)	637	As specified
Fibre cement sheets: profiled and flat	685	As specified
Fibre cement boards	803	As specified
Plywood and composite board	929	
Particle Board:		
Highly Moisture resistant exterior and		Parts 1 to 7
flooring type	EN 312	-
Interior Type	EN 312	
Decorative laminates	SANS ISO 4586 and	High Pressure
	SANS 1405	
Decorative Melamine Faced Boards	1763	
Wooden Doors (flush)	545	
Materials for thermal insulation of	1381	As applicable
buildings		
Mild steel nails	820	
Metal screws for wood	1171	
Creosote	538	As specified
Timber roof trusses	0243	SANS Code of Practice

6. <u>CEILINGS AND PARTITIONS</u>

Refer to Joinery Fittings regarding specifications and requirements of materials.

7. **IRONMONGERY**

Materials

- i) Locks are to comply with SANS 4 as applicable
- ii) Door closers are to comply with SANS 1510 as applicable
- iii) Symbolic safety signs are to comply with SANS 1186 as applicable

All ironmongery, unless otherwise described, is fixed to timber.

Sheet steel furniture to comply with SANS 757 as applicable





UGU DISTRICT: MURCHISON HOSPITAL: ALTERATIONS AND RENOVATIONS OF STAFF ACCOMMODATION

ANNEXURE 2





- Geotechnical Engineering Services
- Engineering Geology
- Environmental and Groundwater
 - Pile Integrity Testing
- SANAS Accredited Soil & Rock Laboratory
- Earthworks/Materials Supervision & Control
- Geotechnical Monitoring Systems
- Road Pavement Materials and Design
- Project Management

Report to Naidu Consulting (Pty) Ltd on the Results of a Geotechnical Investigation for the Proposed Alterations and Additions to the Staff Accommodation at Murchison Hospital, Kwa-Zulu Natal

Reference: 237-19.R01 Revision 0

Dated: 19 November 2019

LEVEL 1 BEE CONTRIBUTOR

• Postal Address: PO Box 1461, Westville, 3630, South Africa

Physical Address: 122 Intersite Avenue, Umgeni Business Park, Durban, 4001, South Africa
 Tel: +27 (0)31 266 0458 / 0861GEOSURE (436 7873)
 Fax: 086 689 5506
 Mobile: +27 (0) 82 784 0544

• E-Mail: info@geosure.co.za

www.geosure.co.za

Report to Naidu Consulting (Pty) Ltd on the Results of a Geotechnical Investigation for the Proposed Alterations and Additions to the Staff Accommodation at Murchison Hospital, Kwa-Zulu Natal

Reference:

237-19.R01 Revision 0

Dated:

19 November 2019

GEOSURE (PTY) LTD

Geotechnical, Environmental & Groundwater Engineering Consultants SANAS Accredited Soil and Rock Laboratory

Head Office & Laboratory

122 Intersite Avenue, Umgeni Business Park, Durban, 4001, South Africa PO Box 1461, Westville, 3630

Head Office

Tel.: 031 266 0458/ 0861 GEOSURE (436 7873)

(International +2731 266 0458) (International +2786 689 5506)

Fax: 086 689 5506

Cell: +27 (0)82 784 0544 E-mail: info@geosure.co.za

Civil Engineering Laboratory

Tel: 031 701 9732 Fax: 086 684 9785

Fax: 086 684 9785 Cell: 072 870 2621

E-mail: lab@geosure.co.za

Gauteng Branch

44 Andries Street

Wynberg

Sandton, Johannesburg

Tel: 0861 GEOSURE (436 7873)

Cell: 082 557 0473

Email: nishen@geosure.co.za

Western Cape Branch

P.O. Box 34008 Rhodes Gift Cape Town

77<u>0</u>7

Tel: +27 (0)84 200 4579 Email: info@geosure.co.za

www.geosure.co.za

Report to Naidu Consulting (Pty) Ltd on the Results of a Geotechnical Investigation for the Proposed Alterations and Additions to the Staff Accommodation at Murchison Hospital, Kwa-Zulu Natal

Reference:

237-19.R01 Revision 0

Date: 19 November 2019

TABLE OF CONTENTS

1.	INTRODUCT	INTRODUCTION AND TERMS OF REFERENCE					
2.	SCOPE OF R	EPORT	1				
3.	GUIDELINES	S FOR INVESTIGATION	1				
4.	INFORMATI	ON REFERENCED	2				
5.	SITE DESCRIPTION						
6.	FIELDWORE	ζ	4				
6.1	INSPECTION	Pits	5				
6.2		MIC CONE PENETROMETER (DCP) TESTS					
6.3		LATION TESTS					
7.		N INFERRED SOILS					
8.	GROUNDWA	TER	7				
9.	LABORATOI	RY TEST RESULTS	7				
10.	DISCUSSION	***************************************	11				
10.1	Propostry F	DEVELOPMENT	11				
10.1		PABILITY OF THE SITE AND PROPOSED DEVELOPMENT					
10.2		N CHARACTERISTICS					
10.3		KS					
		f					
10.5		CONDITIONS					
10.6		OUNDATIONS					
10.7	FOUNDATIO	N RECOMMENDATIONS	15				
10.8	SUITABILITY	OF SITE FOR DISPOSAL OF WASTEWATER EFFLUENT BY SUBSOIL PERCOLATION	16				
Res	ults of Soil Perce	olation Tests	16				
Exi.	sting Septic Tank	rs and Soakaways	18				
Con	nments on Suital	pility of Wastewater Effluent Disposal via Subsoil Percolation	19				
10.9	Drainage	***************************************	20				
11.	SUMMARY O	F FINDINGS AND RECOMMENDATIONS	20				
	DEFENDENCE:	or and a second	22				
12.	REFERENCE	S	22				
	Appendix A:	Inspection Pit Profiles					
	Appendix B:	CBR Dynamic Cone Penetrometer (DCP) Tests					
	Appendix C:	Laboratory Test Results					
	Site Plan	Figure 1					

Document Control Record

Document prepared by:

Geosure (Pty) Ltd 122 Intersite Avenue

Umgeni Business Park

Durban South Africa

4001

Tel:

031 266 0458

Fax:

086 689 5506

E-mail:

geosure@iafrica.com

Website:

www.geosure.co.za

A person using Geosure (Pty) Ltd documents must take note of the following:

a) Electronic copies to be checked against original hard copy version to ensure accuracy.

b) Using the documents or data for any purpose not agreed to in writing with Geosure (Pty) Ltd is prohibited.

Document C	ontrol					
Report Title		Report to Naidu Consulting (Pty) Ltd on the Results of a Geotechnical Investigation for the Proposed Alterations and Additions to the Staff Accommodation at Murchison Hospital, Kwa-Zulu Natal				
Report Reference		237-19.R01	Responsible Person	Mr J. Padayachee		
Client Name		Naidu Consulting (Pty) Ltd	Client Contact Details	Tel: 031 265 6007 Cell: 083 750 0309 Email: Josh.Padayachee@naiduconsulting.com		
Revision	Date	Revision D	etails/Status		Author	
0 19 Nov 19		Report issued with recommendations.			A. Ramroop	
Current Revision						
			Approval			
Signatures		Dana		Dist		
Name		A. Ramroop Pr. Eng.		F. Smith Pr. Sci. Nat		
Title		Geotechnical Engineering Manager		Associate		

Abbreviations and Expansions

Abbreviation	Definition
CBR	California Bearing Ratio
EGL	Existing Ground Level
Geosure	Geosure (Pty) Ltd
FGL	Final Ground Level
H	horizontal
IP	Inspection Pit
km	kilometre(s)
kN/m²	kiloNewtons per square metre
m	metre(s)
mm	millimetre(s)
MPa	MegaPascal
MSL	Mean Sea Level
No.	number
SANS	South African National Standards
SPT	Standard Penetration Test(s)
TLB	Tractor Loader Backhoe
TRH	Technical Recommendations for Highways
V	vertical
wrt	with respect to



Report to Naidu Consulting (Pty) Ltd on the Results of a Geotechnical Investigation for the Proposed Alterations and Additions to the Staff Accommodation at Murchison Hospital, Kwa-Zulu Natal

Reference:

237-19.R01 Revision 0

Date: 19 November 2019

1. INTRODUCTION AND TERMS OF REFERENCE

Geosure (Pty) Ltd, hereafter referred to as Geosure, was requested by Naidu Consulting (Pty) Ltd, hereafter referred to as the Client, to submit a proposal and cost estimate to carry out a geotechnical investigation for the proposed alterations and additions to the staff accommodation at Murchison Hospital, Kwa-Zulu Natal.

Accordingly, a proposal and cost estimate referenced p319-19 (Murchison Hospital 21-08-19)/mb and dated 24 August 2018 was prepared by Geosure and submitted to the Client.

Subsequently, Geosure was appointed via a Letter of Appointment issued by the Client in correspondence dated 9 September 2019.

2. SCOPE OF REPORT

This report sets down the results of a shallow geotechnical investigation for the proposed alterations and additions to the staff accommodation at Murchison Hospital, Kwa-Zulu Natal.

The ground conditions are described and comment is made on the general stability of the site. Recommendations are provided for excavatability, earthworks, subgrade treatment, foundations, drainage and treatment of wastewater by soil percolation methods. Comment is also made on the suitability of the existing subsoil wastewater percolation systems and alternative options for disposal of wastewater from the proposed development upgrade.

3. GUIDELINES FOR INVESTIGATION

The fieldwork for the investigation was carried out according to codes and guidelines relevant to geotechnical investigations of this nature.

The formation and weathering of geological materials are discontinuous processes and unexpected variations in soil, rock and groundwater regimes may occur even on sites where the conditions seem to be uniform or consistent. Variations in what is reported here may become evident during construction and it is thus imperative that an appropriately qualified and experienced Competent Person inspects all critical stages of development including, but not limited to, excavations to assess the conditions encountered and to assist in the interpretation of observations at variance with the information supplied in this report.

This report was prepared for use by Naidu Consulting (Pty) Ltd and their professional team for the purpose stated and should not be relied upon for any other purpose.

109

4. INFORMATION REFERENCED

Geosure was provided with or referenced the following:

- i) A digital copy of a drawing referenced Sheet 1 of 1, titled "Topographical Survey of Staff Accommodation", dated September 2019 and prepared by GeoAfrika Surveys to a scale of 1:500.
- ii) Digital copies of the plans and elevations showing the proposed alterations and additions to the existing buildings, prepared by Artek 4 Architects (KZN) cc.
- iii) Regional geological map titled "3030 Port Shepstone", dated 1988 and prepared by the Council for Geoscience to a scale of 1:250 000;
- iv) Low-resolution satellite imagery sourced from Google Earth.

5. SITE DESCRIPTION

The site is located along National Route 2 in Murchison, approximately 15km west of Port Shepstone, KwaZulu-Natal at the approximate latitude and longitude coordinates 30°43'39.05"S and 30°20'13.79"E, respectively.

The National Route 2 forms the northern boundary of the site. The western and southern boundaries of the site are defined by open veldts and the eastern boundary comprises rural residential developments.

In terms of topography, the site is located on a hilltop with a gently sloping landform.

Vegetation on site comprises grassed lawns, shrubs and trees. Blue Gum trees were observed near the eastern and western boundaries of the site. The site comprises existing single storey buildings. Rock outcrops and boulders were observed across the site.

The regional and local contexts of each site are given in Plates 1 and 2, with general views across the sites given in Plates 3 through 5. The general layout of the site is given in Figure 1.



8. METALWORK

Rates are to include for cutting to lengths, splay cut ends, shaping, holing, tapping, threading, forging, turning, fitting, assembling, welding, filing smooth, preparation, priming coats, hoisting, temporary bracing and fixing in position.

Towel rails are to be tubular Satin Chrome mild steel to diameters - minimum 19mm - and lengths as specified in matched Satin Chrome end pieces. End pieces to be either flat or bracket type - according to requirements, application and specification - plugged and screwed into walls with Chromed Brass screws.

Electro-plating is to comply with SANS ISO 1456 as applicable.

Curtain tracks to be "Forwin" Hospital Curtain Tracks as "Kirton" (Pty) Ltd. - or other approved -, including 15 wheeled runners per metre, hangers, brackets, stopped ends, etc. Hangers are to be suspended from roof timbers or concrete slab over – not off the ceiling grid. Allowance is to be made for necessary bends and curving as per plan supplied. Curtains to be provided as (Chintz fabric (#155CZ) woven with 100% polyester yarn)

SHELVING FOR PHARMACIES: - Shall be epoxy coated steel shelving, either fixed to epoxy coated wall bands or free standing units as specified.

SHELVING FOR CSSD STERILE STORE: - Shall be slatted grade 304 stainless steel wall bands or free standing units as specified.

Aluminium Windows and Doors

NOTE:

Glazed aluminium alloy windows and sliding doors for external use are to comply with SANS 1651 as applicable.

All items must conform to and carry the Certification Seal of the AAAMSA and no items which are not so certified will be accepted on site.

The work is to be cleated and framed.

All visible surfaces are to have a 25 micron anodised finish as specified.

Anodised coatings on aluminium are to comply with SANS 999 as applicable.

Rates are to include for setting up and building in as well as for isolation material between the aluminium surfaces and adjacent surfaces of a differing material.

All visible surfaces are to be covered with a temporary protective tape, later to be removed.

Float glass for glazing is to comply with SANS CKS 55 and SANS 952 as applicable.

Safety and security glazing materials for buildings is to comply with SANS 1263(1) unless otherwise described. All panes are to be marked so as to be visible. Laminated safety glass is to carry a written five year guarantee.

Windows and doors are to be watertight.

Silicon pointing to windows and doors is covered elsewhere.

9. PLASTERING

Rates for new plaster, screeds, etc. to existing surfaces are to include for all preparatory work and forming a key.



Removal of paint and/or varnish as well as the roughening of the existing face brick surfaces both externally and internally to receive new plaster has been measured separately.

Plaster and screeds, etc. in patches is generally of an isolated nature and to existing surfaces. Portion of the work may be in narrow widths.

Where alterations are to be done to the existing structure, the new plaster, etc. has been measured to a point 300mm beyond the line of the alteration on the existing structure.

10. TILING

Ceramic Wall and Floor Tiles are to comply with SANS 1449 as applicable.

11. PLUMBING AND DRAINAGE

Water Supply and Drainage for Buildings is to comply with SANS Code of Practice 0252 as applicable.

Water Supply and Distribution System Components is to comply with SANS 1808 as applicable.

Electrical Water Heater:

Storage Heaters to comply with SANS 151. Instantaneous Heaters to comply with SANS 1356 and IEC 335 (2-35).

12. GLAZING

Glass is to comply with SANS Specification 952.

Glass for glazing is to comply with SANS Specification CKS 55.

Safety and security materials are to comply with SANS Specification 1263 as specified.

Laminated safety glass is to carry a written five year guarantee.



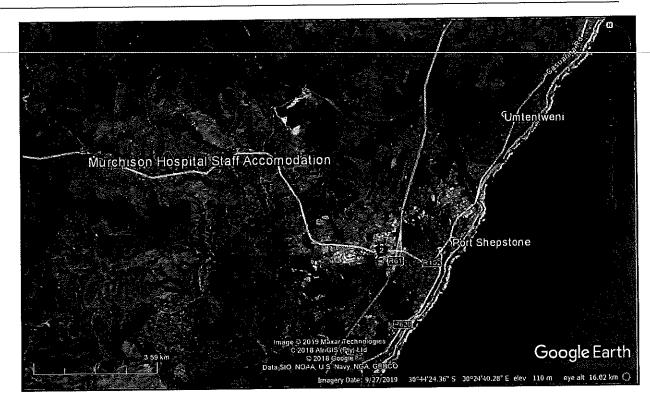


Plate 1: Regional Contexts of the site (sourced from Google Earth 2019).

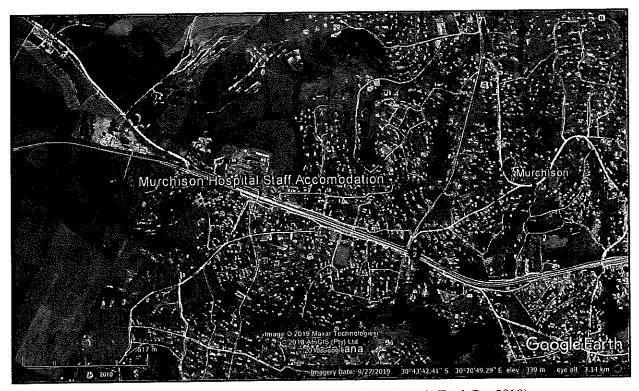


Plate 2: Local Context of the site (sourced from Google Earth Pro 2018).



Plate 3: General view across the site.



Plate 4: General view existing building.



Plate 5: General view of vegetation on site.



Plate 6: General view of rock outcrop



Plate 7: View of septic tank manhole



Plate 8: View of Blue Gum trees

6. FIELDWORK

The fieldwork for the investigation was carried out during October 2019 and comprised the following:

- i) Inspection Pits;
- ii) CBR Dynamic Cone Penetrometer (DCP) Tests; and
- iii) Soil Percolation Tests.

6.1 Inspection Pits

A total of eighteen (18 No.) inspection pits, designated IP1 through IP18, were excavated using hand tools at the approximate positions given in Figure 1. The inspection pits were advanced to final / refusal depths in the approximate range 0.3m (IP18 refers) to 1.15m (IP3 refers) below EGL.

All inspection pits were profiled in accordance with the South African Geoterminology Guidelines (Brink & Bruin, 2002), sampled for laboratory testing, and reinstated on completion.

The inspection pit profiles are given in Appendix A at the end of this report.

6.2 CBR Dynamic Cone Penetrometer (DCP) Tests

Thirty three (33 No.) DCP tests, designated DC1 through DC33, were carried out at the approximate positions given in Figure 1. The DCP tests were advanced to final / refusal depths in the approximate range 0.2m (DC18A refers) to 1.4m (DC32 refers) below EGL.

The results of the DCP tests comprising plots of blow counts versus depth are given in Appendix B at the end of this report.

6.3 Soil Percolation Tests

Seven (7 No.) soil percolation tests, designated PT1 through PT6 and PT/IP18, were carried out in accordance with SABS 0400 (1990) to determine the percolation rates of the subsurface materials for the disposal of wastewater effluent by subsoil percolation methods.

The soil percolation test holes were profiled in accordance with the South African Geoterminology Guidelines (Brink & Bruin, 2002) and were reinstated on completion of the test.

The soil percolation test pit profiles are given in Appendix A at the end of this report. The results of the percolation tests are discussed in Section 10.8.

7. GEOLOGY SN INFERRED SOILS

Inferring from the Council for Geoscience's regional geological map titled "3030 Port Shepstone" to scales of 1: 250 000, the site and surrounds are underlain by Natal Group sandstone.

The sites were observed to be underlain by fill, colluvium, ferricrete and weathered sandstone rock. The soils are described below in increasing order of depth.

i) Fill

These soils can be described as dry to slightly moist, greyish brown / dark brown blotched orange / orange brown, loose to medium dense, fine to medium grained, gravelly silty SAND / clayey gravelly silty SAND / firm, gravelly SANDY CLAY with

115

roots, sandstone fragments and occasional builder's rubble. Fill was encountered in IP5, IP6, IP8B, IP12, IP13, IP14, IP16, PT2, PT5 and PT6 and was observed to occur from EGL to depths in the approximate range 0.18m (PT6 refers) to depths in excess of 0.8m (IP8B refers) below EGL.

ii) Colluvium

These soils can be described as moist to dry to slightly moist, light greyish brown / greyish brown / dark brown, fine to medium grained, gravelly clayey silty SAND / very soft to firm, pinholed, SANDY silty CLAY containing roots. Colluvium was encountered in IP1 through IP4, IP7, IP8A, IP9, IP10, IP11, IP18, PT1, PT3, PT4 and PT5 and was observed to extend to depths in the approximate range 0.16m (IP9 refers) to 0.45m (PT3 refers) below EGL.


iii) Ferricrete (Pedogenic Soils)


These soils can be described as slightly moist, dark brown speckled orange / brown / dark red, medium dense to dense, clayey sandy GRAVEL / sandy GRAVEL / firm, pinholed, gravelly sandy CLAY. Ferricrete were encountered in IP2 through IP7, IP8A, IP9, IP10, IP12 through IP15, PT1, PT2, PT4, PT5 and PT6 and was observed to extend to depths in the approximate range 0.42m (IP7 refers) to depths in excess of 0.83m (IP8A refers) below EGL.


iv) Weathered Sandstone Rock

The weathered sandstone rock can be described as light pink blotched yellow / dark yellowish orange blotched light yellow / dark purple and light pink, moderately to completely weathered, fine to medium grained, slightly to moderately fractured, very soft to soft rock with zones of medium hard rock and occasional infill of greyish brown silty SAND. Weathered sandstone rock was encountered in IP1 through IP7, IP9 through IP18, PT1, PT3, PT4 and PT6 at depths in the approximate range 0.21m (IP18 refers) to 0.9m (IP6 refers) below EGL.

General views of the soil profiles encountered during the fieldwork are given below in plates 11 and 12.



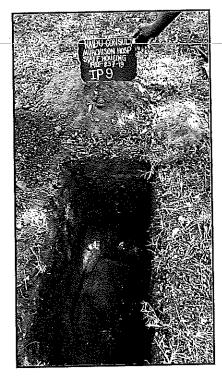



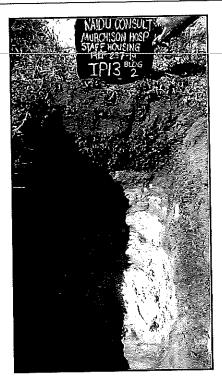


Plate 10: View of profile encountered in IP13.

8. GROUNDWATER

No groundwater seepage was encountered in the inspection pits and percolation test pits during the course of the investigation.

A perched water table may develop both during and after periods of rainfall and/or during the high rainfall season. In this regard, the presence of ferruginous soils is synonymous with the intermittent development of a perched groundwater condition. It is expected that the groundwater condition would be depressed during the drier months and elevated during the wetter periods.

The probability of groundwater seepage activity is assessed to increase with depth and/or near any weakly drained slopes.

The necessity for implementation of subsoil drainage measures or suitable foundation controls should be assessed during the construction phase of the project in consultation with the geotechnical professional.


9. LABORATORY TEST RESULTS

The following laboratory tests were carried out on soil and rock samples retrieved from the site:

- i) Grading Analysis and Atterberg Limits;
- ii) Hydrometer Analysis;
- iii) Modified AASHTO;
- iv) California Bearing Ratio (CBR); and
- v) Moisture Content.

119

The results of the laboratory tests are given in Appendix C and are summarised in Table 1.



<u>Table 1</u>: Upgrade to Murchison Accommodation: Summary of Results of Particle Size Distribution Analysis, Atterberg Limit Determinations, Modified AASHTO and California Bearing Ratio

ann Ce	LIUTINE T	and Camounta Dearing water	9																	Visiterial
A S	nepth	Description		Panticl	Rantigle Size %	P. Carrell	W. III	Auterberg Limits %	<u> </u>	GINT	UNICI (Rec)	MDD (kg/m²)	Swell	06	88	CBR (%) 95 97		98 10	100 (C)	Code & Olassification
	(40)		Table 1	7	SARIE	DAMP IGA	i	≅ 880887	TILLE											
IP13	0.01-0.2	Greyish brown, slightly	6	17	55	19	30	10	5.0	1.36	[8.9]	1	-	1	1					A-2-4 (0) SC *Low
		Clayey graveny Stave							COLLEVIUM					jis -						
1 <u>P</u> 10	0.01-0.3	Light greyish brown, gravelly SAND	7	7	28	63	30	8	4.0		[12.0]			ı	,		-		1	A-2-4(0) SP-SC *Low
Said.								NEW	FERRICHETE	THE										
IP3	0.39-0.67	Dark brown, gravelly sandy CLAY	3	38	52	10	40	14	7.0	1.02	11.3	1782	6.0	6.2	8.6	13	18	21	29	A-6(2) SM G10
IP4	0.25-0.59	Dark brown, slightly	w	9	15	76	35	10	6.0	2.52	[6.0]	\$	1	1	ı				-	A-2-4 (0) GP-GM *Low
IP5	0.27-0.59	Brown blotched purple,		23	45	32	29	10	5.0	1.60	6.7	2015	0.1	=	1.5	17	21	23	27	A-2-4(0) SC G8
IP10	0.0-0.46	Brown blotched purple, slightly clayev SAND	9	6	69	9	26	6	3.0	1.12	[8.7]	·	-	3	,	,	1	-	ı	A-2-4(0) SC *Low
							WEAT	DEFECRIEN	DSAND	HOUSE	WEATHERED SANDSTONE ROCK									
IP3	0.67-1.15	Dark yellow, very soft to soft rock	17	29	40	14	40	14	7.0	96.0	[13.5]	-	-	1		ı		ı	1	A-6(4) SM *Medium
IP4	0.59-0.9	Dark purple and light pink very soft to soft rock		16	53	55	30	12	6.0	1.79	10.4	1994	0.0	6.0	12	18	28	35	55	A-2-6 (0) SC G10

Geosure (Pty) Ltd

Martenial Code & Classification A-1-b(0) SW-SM G7

52

A-1-b(0) SP-SM *Low

100	ě	

٠	7
2	
4	٥
d	3
î	:

80	39	t
R (%)	34	1
CBR (25	ı
80	19	1
(JD)	12	τ
Swell	0.0	-
MDD (Rg/m ²)	1952	İ
OMC [UMC] (%)	7.3	[6.1]
GX	1.93	2.08
S.7	0.5	0:0
Herber Jmits 9 Pi	SP	Æ
T T	SP	ďN.
Gravel	34	41
le Sizie %	57	51
Partic	6	9
Clay		7
Description	Light pink speckled white, soft rock	Light yellow, very soft to soft rock
Depth (m)	IP9 0.51-0.86	IP11 0.29-0.60
IP No:	<u>1P9</u>	P11

- Liquid Limit A-2-4(0) - Revised U.S Classification PI - Plasticity Index - Maximum Dry Density OMC - Optimum Moisture Content SM-SC - Unified Classification - Insitu Moisture Content G10 - Classification in Terms of TRH14 (1985) - Expansiveness According to van der Merwe (1964)

MDD #Low

GM - Grading Modulus NP -- Non Plastic

LS - Linear Shrinkage SP - Stightly Plastic

10. DISCUSSION

10.1 Proposed Development

The existing development comprises single storey structures. On-site sanitation services comprise existing septic tanks and soakaways.

It is understood that the proposed development will comprise upgrades and additions to the 6 No. existing buildings. Parking garages and an elevated water tank are also proposed.

Foundation loads for the proposed development were not made available to Geosure at the time of preparation of this report. Nonetheless, it has been assumed foundation loads for the existing structures are low.

The final foundation loads should be confirmed with Geosure for review and comment on extension of the current appointment of Geosure. If necessary, the recommendations given in this report may then need to be revised and updated.

10.2 General Stability of the Site and Proposed Development

The sandy portions of the fill, colluvium and ferricrete observed on site are considered highly susceptible to rapid erosion by uncontrolled stormwater runoff.

Furthermore, open excavations, even to shallow depths, are considered likely to display rapid sidewall collapse.

Sound earthworks and drainage controls to engineer's design and monitoring of the earthworks and site drainage works by the engineer's representative in consultation with the geotechnical professional, are therefore considered important and strongly recommended.

Based on the results of the fieldwork undertaken during this investigation, it is considered, however, that this site is generally stable and suitable for the proposed development, if the recommendations given in this report are adhered to. Measures amount to no more than sound development controls appropriate to the site conditions expected and the design proposals known at the time of preparation of this report. The global slope stability assessment is based on field data to the depths investigated.

10.3 Excavation Characteristics

Inferring from the results of the field investigation, the fill, colluvium, ferricrete and very soft sandstone rock are anticipated to be relatively easily excavatable in terms of hardness, using appropriate earth moving equipment. These units are inferred to classify as <u>SOFT</u> in terms of excavation classes set out in the SANS 1200DA (South African Bureau of Standards, 1990) specification.

Excavation classes into the soft sandstone rock and harder varieties are likely to grade from <u>INTERMEDIATE</u> to <u>HARD.</u>

Allowance should be made for INTERMEDIATE, HARD and BOULDER excavation

129

classes at shallower depths due to likely geological variations.

Rapid sidewall collapse of excavation sidewalls in the soils anticipated on site will-usually result in unstable excavations, particularly in the event that a shallow perched groundwater condition is encountered. Excavations within such areas may therefore prove to be difficult.

Excavations within the sandstone rock for the proposed septic tank systems may classify as INTERMEDIATE to HARD.

10.4 Earthworks

It is recommended that all earthworks be carried out in accordance with SANS 1200 D (current version). All vegetation, topsoil and unsuitable subgrade material should be cleared from areas over which fills are to be built. Under fills of more than three metres in height, further subgrade improvement may be necessary.

Cut and fill heights greater than approximately 1.5m will need to be analysed and approved by a geotechnical professional. In this regard, an analysis of the proposed cut and fill embankments including laboratory shear box and tri-axial testing is advised, as part of an extension of the current appointment of Geosure.

10.4.1 General Fills

General fills should be placed in layers not exceeding 0.25m when placed in loose condition, and compacted to a minimum of 93% of Modified AASHTO maximum dry density within 1 – 2 percent of optimum moisture content (OMC). Boulders larger than 0.2m should not be included in the fill material. Large boulders or construction rubble within the fill could affect compaction and mask voids into which fines could later migrate, resulting in subsidence. Boulders/rubble may also adversely affect foundation excavations including piling.

Density control of fill material should be undertaken at appropriate intervals during fill construction.

Fill slopes in soils should be formed to batters of up to 1 $_{\text{vertical}}$ to 2 $_{\text{horizontal}}$ ($\leq 26^{\circ}$) and to a height not greater than approximately 1.5m where retaining walls are not provided. Engineered fill slopes should be over constructed and thereafter trimmed back to the required position.

10.4.2 General Cuts

Cut slopes in competent weathered rock should be no steeper than 1 _{vertical} to 0.75 _{horizontal} (\leq 53°) and to a height not greater than 3.0m where retaining solutions are not provided.

Where joints or bedding planes are exposed during excavation it is recommended that a geotechnical specialist be appointed to assess their effects on the stability of the cutting and the global stability of the slope.

Cut slopes in soils should be formed to batters of up to 1 $_{\text{vertical}}$ to 2 $_{\text{horizontal}}$ (\leq 26°) and to a height not greater than approximately 1.5m where retaining walls are not provided.

Where excavations intersect or approach the water table, the sidewalls will tend to become unstable and need to be drained and laterally supported or battered back at slopes of the order of 1 vertical in 5 horizontal.

Workers should not enter any excavations deeper than 1.5m that are not shored or battered back as described above. Sidewalls within the sandy soils will be prone to collapse. All excavations are to be inspected on a daily basis by a competent person to confirm stability. These inspections should be recorded. It remains the responsibility of the contractor, however, to ensure compliance with the current Occupational Health and Safety Act (South African Department of Labour, 1991).

10.4.3 Subgrade Treatment

The following comments for the site have relevance in this regard:

- i) Where reasonable quality sandy material in terms of TRH14 (Committee of State Road Authorities, 1985) is encountered i.e. G9 quality or better, these materials will be suitable for use as the lower selected subgrade and general fill layers. The materials should be ripped to the depths specified by the engineer and re-compacted to 93% (general fill) or 95% (lower selected subgrade) of Modified AASHTO maximum dry density within 1% 2% (wet / dry) of OMC.
- ii) Where marginal to poor road subgrade is exposed i.e. G10 or worse in terms of TRH14 (Committee of State Road Authorities, 1985), undercutting into the unsuitable materials (depending on the road formation level) by the depth specified by the engineer is required to accommodate a select layer comprising material of at least G8 quality.

10.5 Founding Conditions

The founding conditions at the positions investigated are generally inferred to be defined by the following:

- i) The fill and colluvial soils observed on site comprise very soft to soft / firm clays which may exhibit volumetric (swell and shrinkage) movements in response to cyclical fluctuations in ground moisture content. These soils also have low bearing capacities and are considered compressible under foundation loads.
- ii) Trench/excavation sidewalls excavated into the loosely consolidated soil cover are likely to be unstable and require shoring/battering back to engineer's detail.
- iii) The presence of very soft to soft weathered sandstone rock encountered at shallow depths in the approximate 0.21m to 0.9m below EGL.
- iv) Generally, a low risk of shallow groundwater seepage activity at shallow depths at the positions investigated, potentially increasing with depth and/or associated with clay horizons.

10.6 Existing Foundations

The foundations of the existing buildings were exposed at 5 No. positions in order to record the founding levels, foundation dimensions and founding media.

The approximate foundation thicknesses, widths, depths and founding media are given in Table 2.

Table 2: Upgrade to Murchison Accommodation: Measurements of Existing Foundations

IP No.	Measured Foundation Thickness (m)	Measured Roundation Width from Wall (m)	Foundation Depth (m below EGL)	Founding Media
IP2	0.24	0.20	0.48	Medium dense ferricrete
IP8	0.2	0.19	0.25	Medium dense fill
IP15	0.13	0.15	0.31	Firm ferricrete
IP16	0.125	0.20	0.445	Weathered sandstone rock
IP17	0.1	0.20	0.50	Weathered sandstone rock

Photographs of the foundation exposures are given in Plates 11 through 15.



Plate 11: View of exposed foundation in IP2



Plate 12: View of exposed foundation in IP8








Plate 14: View of exposed foundation in IP16



Plate 15: View of exposed foundation in IP17

10.7 Foundation Recommendations

It is understood that the proposed development will comprise additions and alterations to the existing buildings. Information supplied to Geosure indicates that additions to some of the existing buildings will comprise new walls and foundations.

It is considered that reinforced concrete strip / spread foundations will be best suited to the proposed development.

All foundations for the proposed garages, elevated water tank and building additions should be taken down through the fill, colluvium and ferricrete and be founded on weathered sandstone rock of at least very soft rock strength, where a net allowable bearing pressure of 150kN/m² is considered applicable. Weathered sandstone rock was encountered at depths in the approximate range 0.21m to 0.9m below EGL.

125

Total approximate settlement of foundations placed on very soft sandstone rock is likely to be less than 10 mm. Differential settlements can be taken as 50% of total settlement.

10.8 Suitability of Site for Disposal of Wastewater Effluent by Subsoil Percolation

10.8.1 Results of Soil Percolation Tests

The six soil percolation tests carried out, designated PT1 through PT6, comprised the excavation of a hole at each test position to practical depths of between 0.2m and 0.6m below EGL, roughening the sidewalls, pre-soaking of the lower 0.3m of the hole and thereafter recording the fall in the level of water over a period of 35 minutes. Practical limitations experienced governing final depths of the test holes related to the shallow nature of the rock encountered.

The results of the above soil percolation tests are summarised below in Table 3.



yellow COLLUVIUM, resting white, greyish brown, with roots. loose to medium dense, rock. moderately weathered, SAND 0.2 to 0.5 soft SANDSTONE 165 154 300 257 225 201 144 10 80 light abundant speckled on resting on light pink speckled white, rock. grained, clayey sandy orange, medium dense, to medium moderately weathered, Slightly moist, brown blotched purple and GRAVEL. Ferricrete, 0.3 to 0.6 SANDSTONE 250 238 300 289 277 269 258 75 2 fine sandy Slightly moist, brown medium resting on light pink

Table 3: Proposed Staff Housing, Murchison: Summary of Results of Soil Percolation Tests

rock.

soft SANDSTONE

rock.

SANDSTONE

soft

rock.

SANDSTONE

soft

fine to medium grained GRAVELLY sandy

Slightly moist, medium

Dry, greyish brown,

65

100

9

0.3 to 0.6

0.3 to 0.6

0.3 to 0.6

0.3 to 0.6

Depth of percolation test in metres below existing ground 20

time (minutes) for a 25 mm

Percolation rate - average

level

Rate of application of water

fall in test water level

to soils (I/m2 of soakpit wall

area / day)

50

230

15

S

12.5

246

81 53

238 230

275 266 255

287

236

300

300

Drop in Water Level (mm)

146 106

290 280 267 260 252 240

286 270

300

Minutes)

264

20

뙸 30 35

10 15

S

252

185

PT6 300 brown blotched red,

resting on dark purple and light pink, highly weathered, very soft to

> light pink, highly weathered, very soft to

CLAY. FERRICRETE,

COLLUVIUM, resting on dark purple and

roots.

abundant

GRAVEL.

sandy

FERRICRETE, resting on dark purple and pink, highly weathered, very soft to

silty SAND with loose to medium dense,

medium dense, fine to

and dark red, dense,

Description of Soil / Rock

Ferricrete,

GRAVEL.

grained, fine

white,

speckled

moderately weathered,

rock.

SANDSTONE

Slightly moist, greyish brown blotched red, medium grained clayey

10.8.2 Existing Septic Tanks and Soakaways

Two existing septic tanks were identified on site during the field investigation. The approximate positions of the existing septic tanks are shown in Figure 1. An example of a septic tank observed on the site is shown above in Section 5, Plate 7.

The layout and approximate plan dimensions and depths of the septic tanks are shown overleaf in Plates 16 and 17.

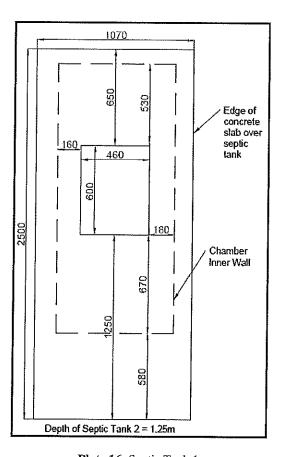


Plate 16: Septic Tank 1

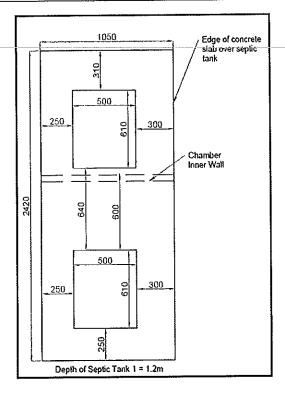


Plate 17: Septic Tank 2

The potential existing soakaway / infiltration areas occur adjacent to the existing septic tanks and approximate footprints of the septic tanks are shown in Figure 1.

10.8.3 Comments on Suitability of Wastewater Effluent Disposal via Subsoil Percolation

The soils investigated satisfy the minimum requirements of SANS 0400 for disposal of wastewater by subsoil percolation at the position investigated, showing percolation design rates in the approximate range 5 minutes to 20 minutes for a 25mm drop in water level. However, due to the presence of shallow sandstone rock including sandstone rock outcrops, it is considered that the design and operation of soakaway systems / french drain systems on the site is not hygienically and practically feasible.

Consideration should therefore be given to alternative options such as one or more evapotranspiration beds to engineer's detail.

An evapotranspirative bed comprises the placement of a permeable, sandy soil bed which will dispose of the effluent from the septic tank system. An alternative evapotranspirative bed system could comprise a lattice of narrow sand filled trenches constructed adjacent to the percolation trench system. The effect of the evapotranspirative beds or trenches are to effectively substitute the insitu impermeable soil mass with a permeable soil mass, and to significantly increase the area of application of effluent to the insitu soils.

Although there are no known design parameters available for the design of an evapotranspirative bed or trench system, such systems in practice have worked satisfactorily on a trial and error basis.

Percolation trench systems can be used in areas where shallow rock is encountered, provided the permeability of the subsurface materials has been enhanced. The permeability

129

of the soils and rock can be improved by mechanical ripping to break up any residual clays and completely to highly weathered rock, and create a voided permeable soil mass.

The effect of select vegetation on the disposal of effluent should, however, not be underestimated. This is particularly the case in the areas of low percolation soils. The judicious planting of high water demand plants and trees such as cannas, banana, wattle, casuarina and eucalytus gum will assist the evapotranspirative process significantly. Conversely, clearing of vegetation or the building over evapotranspiration areas will greatly limit or undermine the process.

For the above reasons, it is recommended that consideration be given to position evapotranspiraton beds near the existing gum trees observed on site.

Alternatively, the options of conservancy tank systems, or mini commercially available package plants, to engineer's detail, should be considered for the site.

10.9 Drainage

A critical factor in the stable development of the site is the control and removal of both surface and groundwater from the site.

Earthworks and drainage measures should be designed in such a way as to prevent ponding, or high concentrations of stormwater or groundwater anywhere on the site, both during and after construction.

Stormwater is to be collected and led in a controlled manner from roofed and paved areas into the nearest municipal stormwater connection facility. In the absence of stormwater connection, all stormwater from the proposed development is to be led into one or more wastewater disposal systems designed to absorb the anticipated inflow.

11. SUMMARY OF FINDINGS AND RECOMMENDATIONS

- i) This report sets down the results of a shallow geotechnical investigation for the proposed alterations and additions to the staff accommodation at Murchison Hospital, Kwa-Zulu Natal.
- ii) Fieldwork for the geotechnical investigation comprised inspection pits, DCP tests and percolation tests.
- iii) The site was observed to be underlain by fill, colluvium, ferricrete and weathered sandstone rock of the Natal Group.
- iv) No groundwater seepage was encountered in the inspection pits and percolation test pits during the course of the investigation.
- v) Foundation loads for the proposed development were not made available to Geosure at the time of preparation of this report. Nonetheless, it has been assumed foundation loads for the existing structures are low.

- vi) Based on the results of the fieldwork undertaken during this investigation, it is considered, however, that this site is generally stable and suitable for the proposed development, if the recommendations given in this report are adhered to.
- vii) Excavations in the fill, colluvium, ferricrete and very soft sandstone rock are inferred to classify as <u>SOFT</u> in terms of excavation classes set out in the SANS 1200DA. Excavation classes into the soft sandstone rock and harder varieties are likely to grade from <u>INTERMEDIATE</u> to <u>HARD</u>.
- viii) It is recommended that all earthworks be carried out in accordance with SANS 1200 D (current version).
 - ix) The foundations of the existing buildings were exposed at 5 No. positions in order to record the founding levels, foundation dimensions and founding media. The measurements of the existing foundations are given in Table 2.
 - x) It is recommended that all new foundations be taken down through the fill, colluvium and ferricrete and be founded on weathered sandstone rock of at least very soft rock strength, where a net allowable bearing pressure of 150kN/m² is considered applicable.
 - xi) The soils satisfy the minimum requirements of SANS 0400 for disposal of wastewater by subsoil percolation at the position investigated however, due to the presence of shallow sandstone rock including sandstone rock outcrops, it is considered that the design and operation of soakaway systems / french drain systems on the site is not hygienically and practically feasible.
- xii) Consideration should be given to alternative options such as one or more evapotranspiration beds. Alternatively, the options of conservancy tank systems, or mini commercially available package plants, to engineer's detail, should be considered for the site.
- xiii) Earthworks and drainage measures should be designed in such a way as to prevent ponding, or high concentrations of stormwater or groundwater anywhere on the site, both during and after construction.
- xiv) The ground conditions given in this report refer specifically to the field tests carried out on site. Conditions at variance with those given in this report could be encountered on site during construction. It is therefore important that Geosure (Pty) Ltd be appointed to carry out periodic inspections during construction. Any change from the anticipated ground conditions should be detected and appropriate action taken at the earliest opportunity to avoid unnecessary expense.

12. REFERENCES

Brink, A., & Bruin, R. (2002). Guidelines for Soil and Rock Logging in South Africa. *Proceedings of the Geoterminology Workshop*. South Africa: Association of Engineering Geologists, South African Institute of Civil Engineering and South African Institute for Engineering and Environmental Geologists.


Committee of State Road Authorities. (1985). THR14: Guidelines for Road Construction Materials. South Africa: Department of Transport.

Google earth. (2018). AfriGIS (Pty) Ltd. Retrieved 01 09, 2018, from Google earth: www.googlearth.com

Jones, G. A. (2017). An Empirical Preliminary Prediction of Heave. *Journal of the South African Institution of Civil Engineering*, 59(No. 4), 64-66.

South African Bureau of Standards. (1990). Standard Specification for Civil Engineering Construction, D: Earthworks. South Africa: South African Bureau of Standards.

Van der Merwe, D. M. (1964). The Prediction of Heave from the Plasticity Index and Percentage Clay Fraction of Soils. *The Civil Engineer in South Africa*, 103-107.



APPENDIX A

INSPECTION PIT PROFILES



P O Box 1461, Westville, 3630, South Africa


Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Groundwater Engineering
Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP1 Sheet 1 of 1

JOB NUMBER: 237-19

Tel: (031) 266-0458 email; info@geosure.co.za Fax: 086 689-5506 www.geosure.co.za



Dry to slightly moist, greyish brown, soft, pinholed, SANDY silty CLAY containing roots. Colluvium.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock contains infill of greyish brown silty SAND. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

-Marburg-

2) Refusal depth at 0,34m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19

TEXT: ..C:\LOGS\PITS.TXT

ELEVATION: -

X-COORD: 30 20'08.5"E Y-COORD: 30 43'36.4"S



P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 emall: info@geosure.co.za


Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Residuation Staff Housing near Murchis

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, Marburg HOLE No: IP2 Sheet 1 of 1

JOB NUMBER: 237-19.

Fax: 086 689-5506 www.geosure.co.za



Slightly moist to moist, greyish brown, soft to firm, intact, sandy slity CLAY containing tree roots. Colluvium.

Slightly moist, dark brown speckled orange, firm, pinholed, gravelly sandy CLAY. Ferricrete.

Dark yellowish orange mottled dark red blotched light yellow, completely to highly weathered, fine to medium grained, very soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Refusal depth at 0,91m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY : S.Chattergoon

TYPE SET BY : K.Kistasamy SETUP FILE : STANDARD.SET INCLINATION:

DIAM:

DATE: 02 October 2019 DATE: 02 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT ELEVATION: -

X-COORD: 30 20'12.0"E Y-COORD: 30 43'40.6"S





Geotechnical, Environmental & Naldu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory


Proposed Additions and Renovations to Staff Housing near MurchIson Hospital,

HOLE No: IP3 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa

Tel: (031) 266-0458 email: info@geosure.co.za Fax: 086 689-5506 www.geosure.co.za



Slightly moist to moist, greyish brown, soft to firm, intact, sandy silty CLAY containing tree roots. Colluvium.

Slightly moist, dark brown speckled orange, firm, pinholed, gravelly sandy CLAY contains large roots. Ferricrete.

Dark yellow mottled orange speckled light yellow, completely to highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

Marburg

- 2) Samples taken at: S1 0,39--0,67 (2 x Bulk) S2 0,67--1,15 (1 x Ind)
- 3) Refusal depth at 1,15m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 02 October 2019 DATE: 02 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 2014.0"E Y-COORD: 30 43'41.6"S




P O Box-1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za

Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, Marburg HOLE No: IP4 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Slightly moist to moist, greyish brown, soft to firm, intact, sandy silty CLAY containing tree roots. Colluvium.

Slightly moist, dark brown speckled orange, medium dense, pinholed, slightly clayey GRAVEL. Ferricrete.

Dark purple and light pink mottled dark yellow speckled white, highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Polycop (15mm) pipe encountered at 0,24m.
- 3) Samples taken at: S1 0,25--0,59 (1 x Ind) S2 0,59--0,90 (2 x Bulk)
- 4) Refusal depth at 0,90m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy
SETUP FILE: STANDARD.SET

INCLINATION:

DIAM:

DATE: 02 October 2019 DATE: 02 October 2019

DATE: 15/11/19 12:19 TEXT: ...C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'14.2"E Y-COORD: 30 43'40.1"S



Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory


Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP5 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za

Fax: 086 689-5506 www.geosure.co.za



Dry to slightly moist, greyish brown, loose, fine to medium grained, gravelly silty SAND containing

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL, Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

Marburg

- 2) Sample taken at: S1 0,27--0,59 (2 x Bulk)
- 3) Refusal depth at 0,81m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'15.7"E Y-COORD: 30 43'39,1"S



Geotechnical, Environmental &
Groundwater Engineering
Pile Integrity Testing & Civil
Engineering Laboratory

Naidu Consulting (Pty) Ltd
Proposed Additions and Re

Naidu Consulting (Pty) Ltd
Proposed Additions and Renovations to
Staff Housing near Murchison Hospital,
Marburg


HOLE No: IP6 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

Tel: (031) 266-0458 email: info@geosure.co.za

Fax: 086 689-5506 www.geosure.co.za



Slightly moist, dark brown blotched orange, medium dense, fine to medium grained, clayey gravelly silty SAND, gravel comprises sandstone fragments. FILL.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Refusal depth at 1,05m.

CONTRACTOR:

MACHINE : By hand

DRILLED BY:

PROFILED BY : S.Chattergoon

TYPE SET BY : K.Kistasamy SETUP FILE : STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT ELEVATION: -

X-COORD: 30 20'13.6"E Y-COORD: 30 43'37.8"S



Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP7 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa

Scale

1:25


Tel: (031) 266-0458 email: info@geosure.co.za Fax: 086 689-5506 www.geosure.co.za

0.00

_ 0.23

0.42

0.81



Slightly moist, brown and dark red, dense, fine to medium grained, sandy GRAVEL. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Refusal depth at 0,81m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'16.7"E Y-COORD: 30 43'37,8"S

HOLE No: IP7

D069 Geosure (Pty) Ltd

dotPLOT 6008 PBp



P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za

Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, HOLE No: IP8A Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za

Scale 0.00
1:25 0.20
0.40
0.40
0.60
0.60
0.60
0.83

Concrete Foundation.

Marburg

Dry, greyish brown, very soft, SANDY silty CLAY containing grass roots. Colluvium.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

NOTES

- 1) No groundwater seepage observed.
- 2) Refusal depth at 0,80m on bricks.

CONTRACTOR:

MACHINE : By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET

INCLINATION:

MAIG

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION:**-

X-COORD: 30 20'13.5"E Y-COORD: 30 43'38.0"S





P O Box 1461, Westville, 3630, South Africa

Tel: (031) 266-0458 email: info@geosure.co.za Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP8B Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za

Scale 0.00 1:25

Dry to slightly moist, greyish brown, loose, fine to medium grained, gravelly silty SAND containing large amounts of broken bricks. FILL.

0.80

NOTES

1) No groundwater seepage observed.

Marburg

2) Refusal depth at 0,80m on bricks.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 2013.5"E Y-COORD: 30 43'38.0"S



Tel: (031) 266-0458


Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP9 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Fax: 086 689-5506 www.geosure.co.za email: info@geosure.co.za



Slightly moist, dark brown, firm, intact, sandy silty CLAY containing roots. Colluvium.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Sample taken at: S1 0,51--0,86 (2 x Bulk)
- 3) Refusal depth at 0,86m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY : S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'13.8"E Y-COORD: 30 43'36.5"S

HOLE No: IP9

D069 Geosure (Pty) Ltd

dotPLOT 6008 PBp





Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,


HOLE No: IP10 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

email: info@geosure.co.za

Fax: 086 689-5506 www.geosure.co.za



Dry, light greyish brown, loose, pinholed, gravelly SAND containing large amounts of grass roots.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, slightly clayey SAND. Ferricrete.

Dark orange blotched light pink speckled white, moderately weathered, moderately fractured, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

Marburg

- 2) Samples taken at: S1 0,01--0,30 (1 x Ind) S2 0,30--0,46 (1 x Ind)
- 3) Refusal depth at 0,61m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S,Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'10.9"E Y-COORD: 30 43'36.7"S





P.O. Box 1461, Westville, 3630, South Africa

Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory


Fax: 086 689-5506

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP11 Sheet 1 of 1

JOB NUMBER: 237-19.

Tel: (031) 266-0458 email: info@geosure.co.za



Dry, greyish brown, loose, fine to medium grained, gravelly clayey silty SAND containing grass

Light yellow speckled white mottled light orange, highly weathered, moderately fractured, fine to medium grained, very soft to soft rock with zones of medium hard rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

Marburg

- 2) Sample taken at: S1 0,29--0,60 (2 x Bulk)
- 3) Refusal depth at 0,60m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K, Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'07.5"E Y-COORD: 30 43'36.0"S

HOLE No: IP11

D069 Geosure (Pty) Ltd



P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

email: info@geosure.co.za


Geotechnical, Environmental & Naldu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Fax: 086 689-5506

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP12 Sheet 1 of 1

JOB NUMBER: 237-19



Slightly moist, dark brown blotched orange, medium dense, fine to medium grained, clayey gravelly silty SAND, gravel comprises sandstone fragments. FILL.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock, SANDSTONE, Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Slow advance of excavation at 0,71m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET


INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'13.8"E Y-COORD: 30 43'37.4"S





P O Box-1461, Westville, 3630, South-Africa Tel: (031) 266-0458 email: info@geosure.co.za


Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: 1P13 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Dry to slightly moist, greyish brown, medium dense, fine to medium grained, slightly clayey gravelly SAND containing grass roots. FILL.

Slightly moist, dark brown speckled orange, firm, pinholed, gravelly sandy CLAY. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Sample taken at: S1 0,01--0,20 (1 x lnd)
- 3) Refusal depth at 0,72m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'12.0"E Y-COORD: 30 43'39.1"S





P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

email: info@geosure.co.za


Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

Marburg-

Fax: 086 689-5506 www.geosure.co.za HOLE No: IP14 Sheet 1 of 1

JOB NUMBER: 237-19



Dry to slightly moist, greyish brown, medium dense, fine to medium grained, gravelly clayey slity SAND containing grass roots, FILL.

Slightly moist, dark brown speckled orange, firm, pinholed, gravelly sandy CLAY. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Old concrete foundation at 0,12m.
- 3) Refusal depth at 0,16m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'12,8"E Y-COORD: 30 43'43.0"S






P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za

Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naldu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, HOLE No: IP15 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Brickwork and concrete footing.

Slightly moist, dark brown speckled orange, firm, pinholed, gravelly sandy CLAY. Ferricrete.

Dark purple and light pink mottled dark yellow speckled white, highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Refusal depth at 0,65m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'14.8"E Y-COORD: 30 43'40.6"S

HOLE No: IP15

D069 Geosure (Pty) Ltd

LOT 6008 PBP



Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,


HOLE No: IP16 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa

Tel: (031) 266-0458 email: info@geosure.co.za

Fax: 086 689-5506 www.geosure.co.za

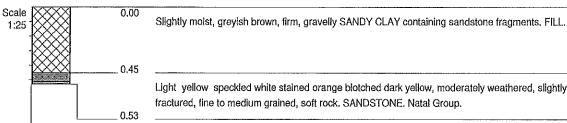

Light yellow speckled white stained orange biotched dark yellow, moderately weathered, slightly fractured, fine to medium grained, soft rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

warburg

- 2) Cable duct at 0,08m.
- 3) Refusal depth at 0,53m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'15,6"E Y-COORD: 30 43'38.4"S

HOLE No: IP16

D069 Geosure (Pty) Ltd



dotPLOT 6008_PBp



P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za


Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: IP17 Sheet 1 of 1

JOB NUMBER: 237-19





Dark purple and light pink mottled dark yellow speckled white, highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

1) No groundwater seepage observed.

Brickwork and concrete footing.

2) Refusal depth at 0,68m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:19 TEXT: ..C:\LOGS\PITS.TXT **ELEVATION: -**

X-COORD: 30 20'09.8"E Y-COORD: 30 43'36.5"S




Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital, Marburg

HOLE No: PT1 Sheet 1 of 1

JOB NUMBER: 237-19

Tel: (031) 266-0458 emall: info@geosure.co.za Fax: 086 689-5506 www.geosure.co.za



Slightly moist to moist, greyish brown, soft to firm, intact, sandy silty CLAY containing tree roots. Colluvium.

Slightly moist, brown and dark red, dense, fine to medium grained, sandy GRAVEL. Ferricrete.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Final depth at 0,60m.

CONTRACTOR:

MACHINE:

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY : K, Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:20 TEXT: ..C:\LOGS\PTS.TXT **ELEVATION: -**

X-COORD: -

Y-COORD: -



P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458 email: info@geosure.co.za


Geotechnical, Environmental &
Groundwater Engineering
Pitle Integrity Testing & Civil
Engineering Laboratory

Naidu Consulting (Pty) Ltd
Proposed Additions and Re

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, Marburg HOLE No: PT2 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Slightly moist, dark brown blotched orange, medium dense, fine to medium grained, clayey gravelly silty SAND, gravel comprises sandstone fragments. FILL.

Slightly moist, brown blotched purple and orange, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

NOTES

- 1) No groundwater seepage observed.
- 2) Final depth at 0,60m.

CONTRACTOR:

MACHINE:

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 04 October 2019 DATE: 04 October 2019

DATE: 15/11/19 12:20

TEXT: ..C:\LOGS\PTS.TXT

ELEVATION: -

X-COORD: 30 20'13.8"E Y-COORD: 30 43'37.4"S







Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory

Proposed Additions and Renovations to Staff Housing near Murchison Hospital,


HOLE No: PT3 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

email: info@geosure.co.za

Fax: 086 689-5506 www.geosure.co.za

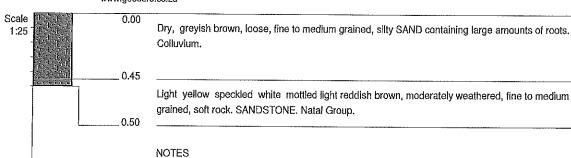

- 1) No groundwater seepage observed.
- 2) Final depth at 0,50m.

CONTRACTOR:

MACHINE:

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY : K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:20 TEXT: ..C:\LOGS\PTS.TXT **ELEVATION:-**

X-COORD: 30 20'12.2579"E Y-COORD: 30 43'42.32884"S

HOLE No: PT3

D069 Geosure (Pty) Ltd




Tel: (031) 266-0458 email: Info@geosure.co.za Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

HOLE No: PT4 Sheet 1 of 1

JOB NUMBER: 237-19

P O Box 1461, Westville, 3630, South Africa Fax: 086 689-5506 www.geosure.co.za



Dry, greyish brown, loose, fine to medium grained, silty SAND containing large amounts of roots.

Slightly moist, greyish brown blotched red, medium dense, fine to medium grained, clayey sandy GRAVEL. Ferricrete.

Dark purple and light pink mottled dark yellow speckled white, highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Final depth at 0,60m.

CONTRACTOR:

MACHINE:

DRILLED BY: PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET

D069 Geosure (Pty) Ltd

INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:20 TEXT: ..C:\LOGS\PTS.TXT **ELEVATION:-**

X-GOORD: 30 20'13.76549"E Y-COORD: 30 43'40.68013"S

HOLE No: PT4

dotPLOT 6008 PBp





P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

email: info@geosure.co.za

Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory


Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

Marburg

HOLE No: PT5 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Slightly moist, brown and orange brown, loose, fine to medium grained, gravelly clayey SAND containing occasional pieces of glass and plastic. FILL.

Dry, greyish brown, loose, fine to medium grained, silty SAND containing large amounts of roots.

Slightly moist, greyish brown blotched red, medium dense, fine to medium grained, clayey sandy GRAVEL, Ferricrete.

NOTES

- 1) No groundwater seepage observed.
- 2) Final depth at 0,60m.

CONTRACTOR:

MACHINE:

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET INCLINATION:

DIAM:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:20 TEXT: ..C:\LOGS\PTS.TXT **ELEVATION:-**

X-COORD: 30 20'11,2"E Y-COORD: 30 43'40.1"S

HOLE No: PT5

D069 Geosure (Pty) Ltd







P.O.Box 1461, Westville, 3630, South Africa. Tel: (031) 266-0458 email: info@geosure.co.za


Geotechnical, Environmental & Groundwater Engineering Pile Integrity Testing & Civil Engineering Laboratory

Naidu Consulting (Pty) Ltd Proposed Additions and Renovations to Staff Housing near Murchison Hospital, Marburg

HOLE No: PT6 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Slightly moist, brown and orange brown, soft, fine to medium grained, sandy silty CLAY containing roots. FILL.

Slightly moist, medium brown, fine to medium grained, GRAVELLY sandy CLAY, Ferricrete.

Dark purple and light pink mottled dark yellow speckled white, highly weathered, fine to medium grained, very soft to soft rock. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Final depth at 0,60m.

CONTRACTOR:

MACHINE:

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD, SET INCLINATION:

DATE: 14 October 2019 DATE: 14 October 2019

DATE: 15/11/19 12:20 TEXT: ..C:\LOGS\PTS.TXT **ELEVATION: -**

X-COORD: 30 20'15.03385"E Y-COORD: 30 43'37.45967"S

HOLE No: PT6

D069 Geosure (Pty) Ltd





P O Box 1461, Westville, 3630, South Africa Tel: (031) 266-0458

1:25

email: info@geosure.co.za

Geotechnical, Environmental & Naidu Consulting (Pty) Ltd Pile Integrity Testing & Civil Engineering Laboratory


Proposed Additions and Renovations to Staff Housing near Murchison Hospital,

Marburg

HOLE No: PT / IP18 Sheet 1 of 1

JOB NUMBER: 237-19

Fax: 086 689-5506 www.geosure.co.za



Dry to slightly moist, greyish brown, soft, pinholed, SANDY silty CLAY containing roots. Colluvium.

Light pink speckled white mottled dark pink blotched yellow, moderately weathered, fine to medium grained, slightly fractured, soft rock contains infill of greyish brown silty SAND. SANDSTONE. Natal Group.

NOTES

- 1) No groundwater seepage observed.
- 2) Abandoned percolation test.
- 3) Refusal depth at 0,30m.

CONTRACTOR:

MACHINE: By hand

DRILLED BY:

PROFILED BY: S.Chattergoon

TYPE SET BY: K.Kistasamy SETUP FILE: STANDARD.SET

INCLINATION:

DIAM:

DATE: 14 October 2019

DATE: 14 October 2019

DATE: 15/11/19 12:19


TEXT: ..C:\LOGS\PITS.TXT

ELEVATION:-

X-GOORD: 30 20'08.37"E Y-COORD: 30 43 36.62 S

HOLE No: PT / IP18







APPENDIX B

CBR DYNAMIC CONE PENETROMETER (DCP) TESTS





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Emall: info@geosure.co.za

GEOSURE (Pty) Ltd

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBR Penetrometer Probe -----

Test No.DC 1

	Depth	Blows/	Inferred	Shear	CBR
Į	(m)	100mm	Consistency	Strength	%
	0				
	0.1	2	Loose	<30 deg	3
1	0.2	3	Loose	<30 deg	5
١	0.3	16	Dense	37 deg	29
١		Refusal			•

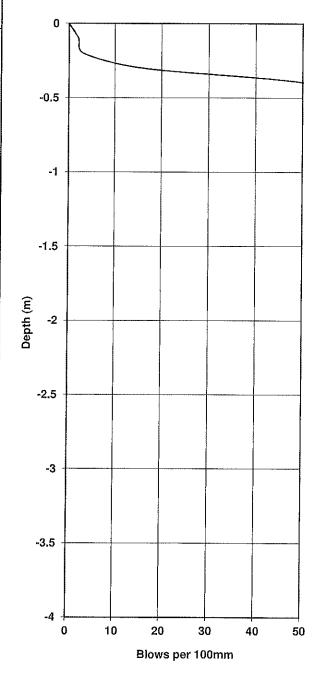



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Penetrometer Probe -----CBR

Test No. DC

2

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0	· · · · · · · · · · · · · · · · · · ·			
0.1	4	Med.Dense	30 deg	7
0.2	5	Med.Dense	32 deg	8
0.3	4	Med.Dense	30 deg	7
0.4	7	Med.Dense	34 deg	12
0.5	18	Dense	37 deg	33
0.6	24	Dense	38 deg	47
0.7	18	Dense	37 deg	33
0.8	20	Dense	38 deg	37
	Refusal			

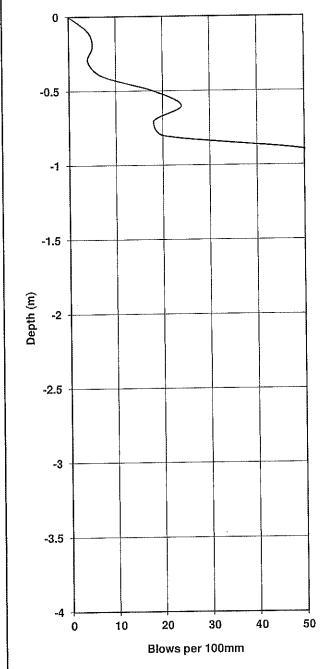



Naidu Consulting

Section: Murchison Mission, Marburg

Geotechnical Engineering Consultants

Project:

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Operator: S.Chattergoon


Date: 2-Oct-2019

CBRPenetrometer Probe -----

Staff Housing for Murchison Hopsital at

Test No.DC 3

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	8	Med.Dense	35 deg	14
0.2	9	Med.Dense	35 deg	15
0,3	9	Med.Dense	35 deg	15
0.4	8	Med.Dense	35 deg	14
0.5	8	Med.Dense	35 deg	14
0.6	11	Dense	36 deg	19
0.7	6	Med.Dense	33 deg	10
0.8	8	Med.Dense	35 deg	14
0.9	6	Med.Dense	33 deg	10
1	16	Dense	37 deg	29
1.1	26	Very Dense	>38 deg	51
	Refusal			

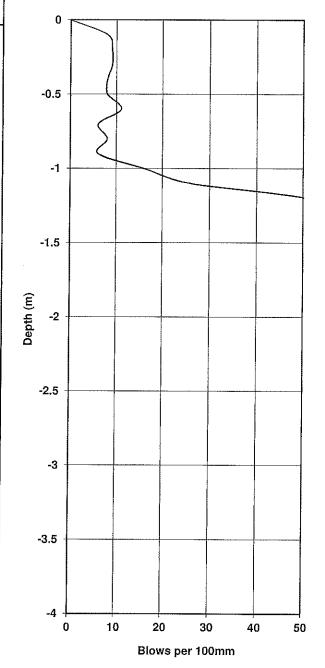





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 6

Fax: 086 689 5506 Email: info@geosure.co.za

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg



Ref.No. 237-2019

Date: 2-Oct-2019


Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No.DC 4

Test No. DC 4

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	10	Med,Dense	36 deg	17
0.2	9	Med.Dense	35 deg	15
0.3	16	Dense	37 deg	29
0.4	29	Very Dense	>38 deg	>55
0.5	27	Very Dense	>38 deg	54
0.6	34	Very Dense	>38 deg	>55
	Refusal			

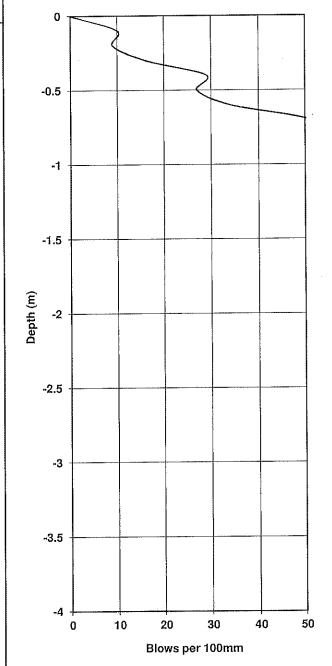

Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506 Email: Info@geosure.co.za



Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Ref.No. 237-2019


Date: 4-Oct-2019

Operator: S.Chattergoon


Penetrometer Probe -----CBR

Test No. DC 5

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	6	Med.Dense	33 deg	10
0.2	12	Dense	36 deg	21
0.3	10	Med.Dense	36 deg	17
0.4	22	Dense	38 deg	42
0.5	29	Very Dense	>38 deg	>55
0.6	14	Dense	37 deg	25
0.7	15	Dense	37 deg	27
0.8	8	Med.Dense	35 deg	14
0.9	9	Med.Dense	35 deg	15
1	26	Very Dense	>38 deg	51
	Refusal			

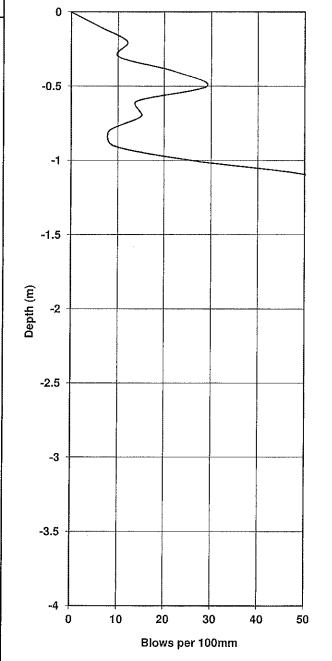





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Pot No. 227-2019

Ref.No. 237-2019

Date: 4-Oct-2019

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No.DC 6

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0	<u> </u>			
0.1	5	Med.Dense	32 deg	8
0.2	8	Med.Dense	35 deg	14
0.3	4	Med.Dense	30 deg	7
0.4	4	Med.Dense	30 deg	7
0.5	9	Med.Dense	35 deg	15
0.6	6	Med.Dense	33 deg	10
0.7	5	Med.Dense	32 deg	8
0.8	11	Dense	36 deg	19
0.9	11	Dense	36 deg	19
1 1	21	Dense	38 deg	40
	Refusal			

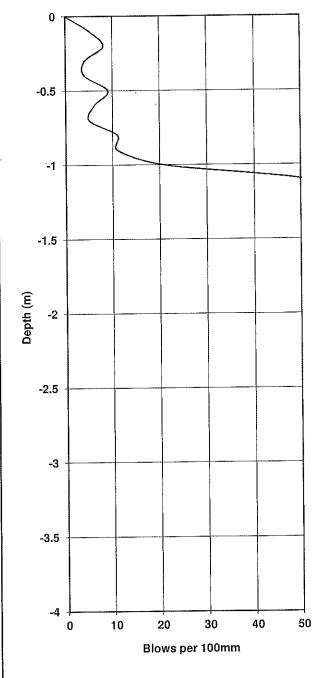



Geotechnical Engineering Consultants

Tel. (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBRPenetrometer Probe -----

Test No.DC

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	2	Loose	<30 deg	3
0.2	11	Dense	36 deg	19
0.3	24	Dense	38 deg	47
0.4	18	Dense	37 deg	33
	Refusal			

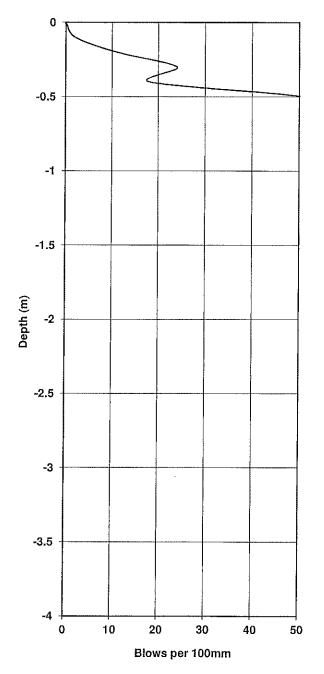





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019 Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Penetrometer Probe -----CBR

Test No.DC 8

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	3	Loose	<30 deg	5
0.2	3	Loose	<30 deg	5
0.3	2	Loose	<30 deg	3
0.4	5	Med.Dense	32 deg	8
0.5	7	Med.Dense	34 deg	12
0.6	7	Med.Dense	34 deg	12
0.7	4	Med.Dense	30 deg	7
0.8	7	Med.Dense	34 deg	12
0.9	12	Dense	36 deg	21
1	9	Med.Dense	35 deg	15
1.1	8	Med.Dense	35 deg	14
1.2	18	Dense	37 deg	33
	Refusal			

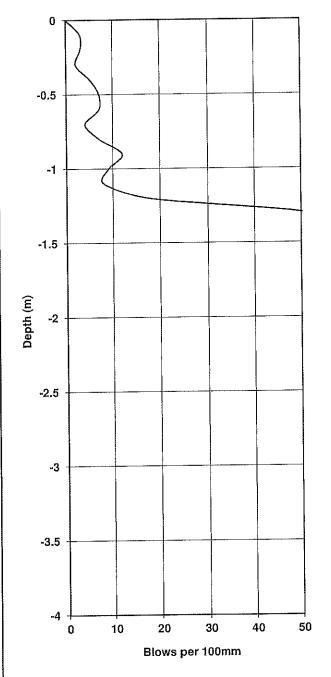

Geotechnical Engineering Consultants

Client:

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Section: Murchison Mission, Marburg

Naidu Consulting


Operator: S.Chattergoon

CBR*Probe* -----Penetrometer

Project: Staff Housing for Murchison Hopsital at

Test No.DC 9

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	5	Med.Dense	32 deg	8
0,2	4	Med.Dense	30 deg	7
0.3	4	Med.Dense	30 deg	7
0.4	11	Dense	36 deg	19
0.5	17	Dense	37 deg	31
0.6	13	Dense	37 deg	23
0.7	25	Very Dense	38 deg	49
	Refusal			

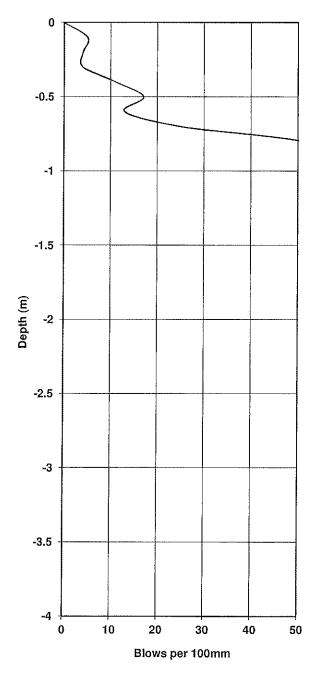



Geotechnical Engineering Consultants

Fax: 086 689 5506 Tel: (031) 266 0458

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Penetrometer Probe -----CBR

Test No.DC

10

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	5	Med.Dense	32 deg	8
0.2	6	Med.Dense	33 deg	10
0.3	10	Med.Dense	36 deg	17
0.4	16	Dense	37 deg	29
0.5	21	Dense	38 deg	40
0.6	14	Dense	37 deg	25
0.7	33	Very Dense	>38 deg	>55
0.8	3	Loose	<30 deg	5
0,9	6	Med.Dense	33 deg	10
1	10	Med.Dense	36 deg	17
	Refusal			

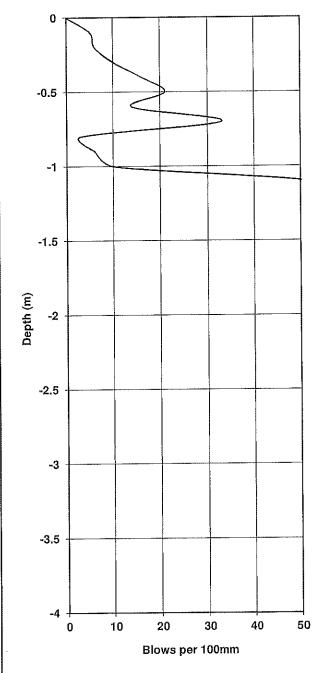

Geotechnical Engineering Consultants

Client:

Tel: (031) 266 0458 Fax: 086 689 5506

- Email: info@geosure.co.za

Ref.No. 237-2019

(Pty) Ltd

Date: 4-Oct-2019

Section: Murchison Mission, Marburg

Naidu Consulting


Operator: S.Chattergoon

CBRPenetrometer Probe -----

Project: Staff Housing for Murchison Hopsital at

Test No. DC 11

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	2	Loose	<30 deg	3
0.2	3	Loose	<30 deg	5
0.3	6	Med.Dense	33 deg	10
0.4	26	Very Dense	>38 deg	51
0.5	39	Very Dense	>38 _, deg	>55
	Refusal			

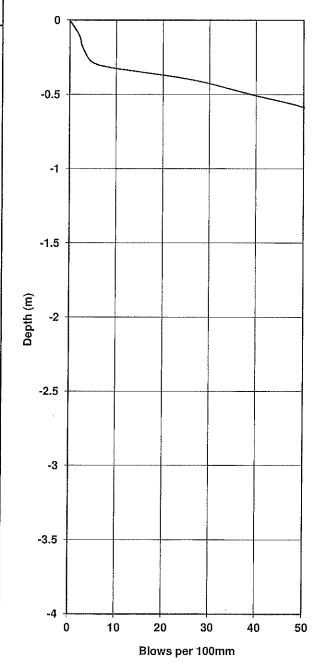



Geotechnical Engineering Consultants

Fax: 086 689 5506 Tel: (031) 266 0458

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Probe -----Penetrometer CBR

Test No. DC

12

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	3	Loose	<30 deg	5
0.2	4	Med.Dense	30 deg	7
0.3	6	Med.Dense	33 deg	10
0,4	6	Med.Dense	33 deg	10
	Refusal			

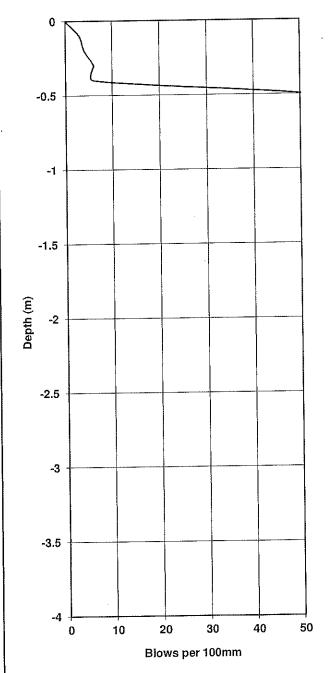



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

GEDSURE

(Pty) Ltd

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg


Ref.No. 237-2019


Date: 4-Oct-2019
Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No. DC 13

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	1	Very Loose	<29 deg	2
0.2	3	Loose	<30 deg	5
0.3	4	Med.Dense	30 deg	7
0.4	4	Med.Dense	30 deg	7
0.5	3	Loose	<30 deg	5
0.6	4	Med.Dense	30 deg	7
0.7	3	Loose	<30 deg	5
8.0	3	Loose	<30 deg	5
0.9	7	Med.Dense	34 deg	12
1	13	Dense	37 deg	23
1.1	16	Dense	37 deg	29
	Refusal			

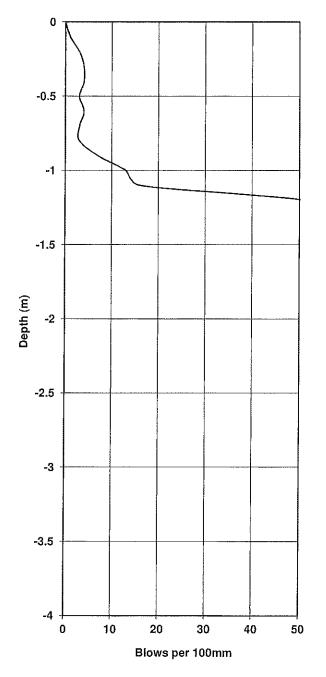





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBR Penetrometer Probe -----

Test No. DC 14A

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	2	Loose	<30 deg	3
0.2	1	Very Loose	<29 deg	2
0.3	2	Loose	<30 deg	3
0.4	12	Dense	36 deg	21
	Refusal			

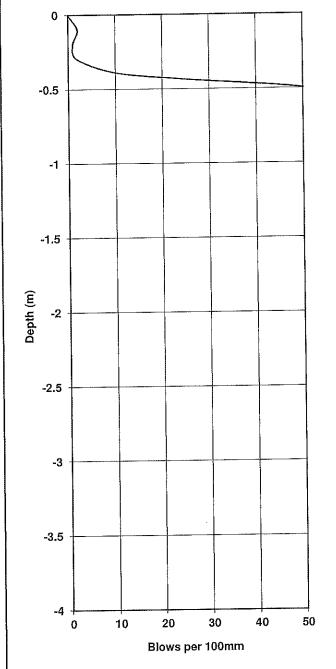

Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Het.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

CBR Penetrometer Probe -----

Test No.DC 14B

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0		"		
0.1	1	Very Loose	<29 deg	2
0.2	2	Loose	<30 deg	3
0.3	3	Loose	<30 deg	5
0.4	4	Med.Dense	30 deg	7
0.5	16	Dense	37 deg	29
	Refusal			

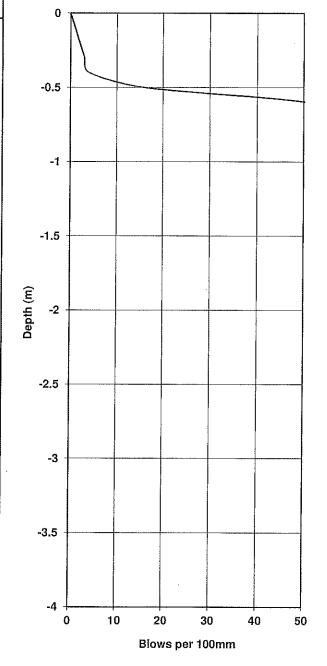



Geotechnical Engineering Consultants

Fax: 086 689 5506 Tel: (031) 266 0458

Email: into@geosure.co.za

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg



Ref.No. 237-2019

Date: 4-Oct-2019


Operator: S.Chattergoon

Penetrometer Probe -----CBR

Test No. DC

15

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	4	Med.Dense	30 deg	7
0.2	5	Med.Dense	32 deg	8
0.3	11	Dense	36 deg	19
0.4	14	Dense	37 deg	25
	Refusal			

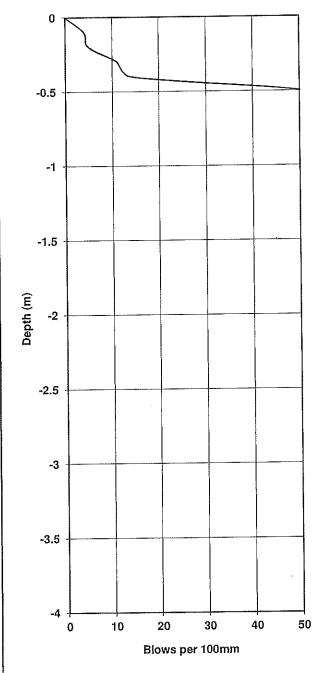



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBR Penetrometer Probe

Test No. DC 16

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	6	Med.Dense	33 deg	10
0.2	5	Med.Dense	32 deg	8
0.3	10	Med.Dense	36 deg	17 -
0.4	19	Dense	37 deg	35
0.5	10	Med.Dense	36 deg	17
0.6	13	Dense	37 deg	23
0.7	17	Dense	37 deg	31
0.8	25	Dense	38 deg	49
	Refusal			

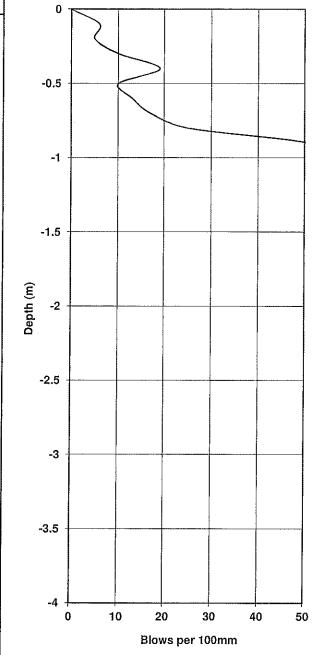



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

CBR Penetrometer Probe-----

Test No. DC 17

Test No. DC 11

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	2	Loose	<30 deg	3
0.2	2	Loose	<30 deg	3
0.3	4	Med.Dense	30 deg	7
0.4	26	Very Dense	>38 deg	51
0.5	21	Dense	38 deg	40
	Refusal			

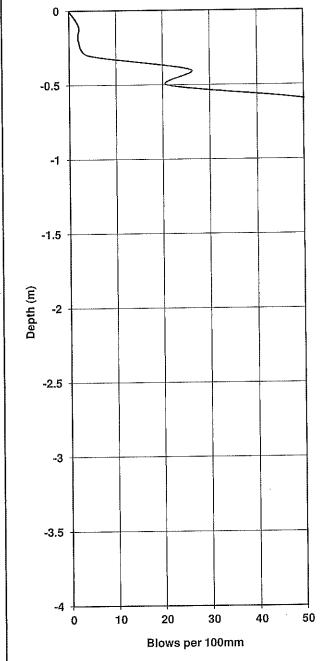





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBRPenetrometer Probe -----

Test No.DC 18A

	Depth	Blows/	Inferred	Shear	CBR
	(m)	100mm	Consistency	Strength	%
i	0				
	0.1	1	Very Loose	<29 deg	2
-	0.2	4	Med.Dense	30 deg	7
		Refusal			

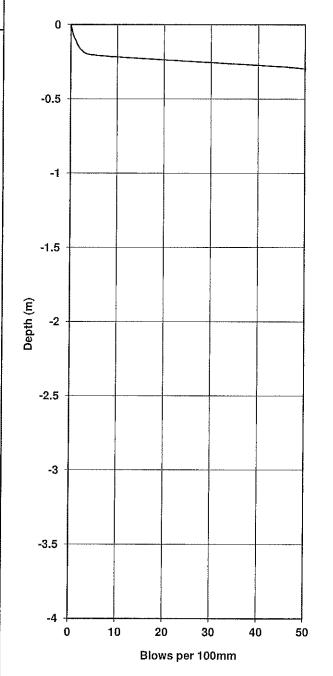



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086

Fax: 086 689 5506 Email: info@geosure.co.za

(Pty) L

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBR Penetrometer Probe------

Test No. DC 18B

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	4	Med,Dense	30 deg	7
0.2	4	Med.Dense	30 deg	7
0.3	19	Dense	37 deg	35
0.4	26	Very Dense	>38 deg	51
	Refusal			

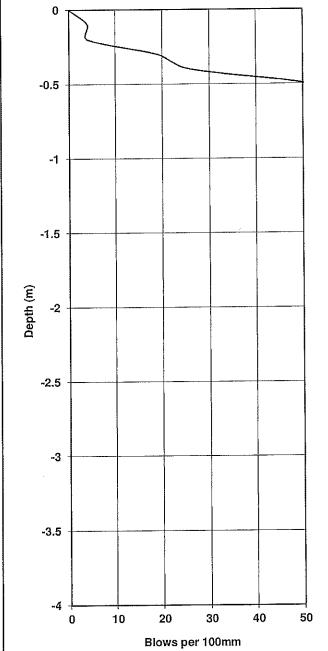



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

GEUSURE (Pty) Ltd

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

CBR Penetrometer Probe------

Test No. DC 19

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	16	Dense	37 deg	29
0.2	8	Med.Dense	35 deg	14
0.3	6	Med.Dense	33 deg	10
0.4	16	Dense	37 deg	29
0.5	23	Dense	38 deg	44
0.6	12	Dense	36 deg	21
0.7	6	Med.Dense	33 deg	10
0.8	10	Med.Dense	36 deg	17
0.9	13	Dense	37 deg	23
	Refusal			

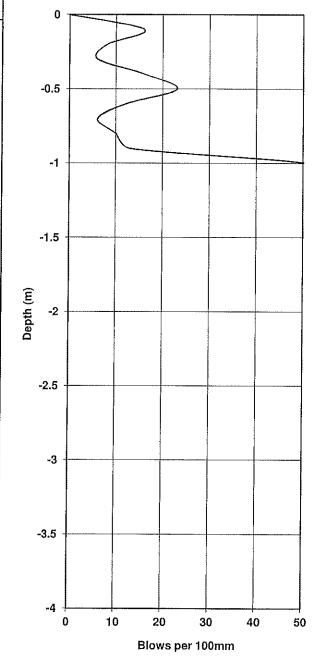

Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

—Email∺info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

(Pty) Ltd

Operator: S.Chattergoon

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Penetrometer *Probe* -----CBR

Test No.DC

20

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	1	Very Loose	<29 deg	2
0.2	4	Med.Dense	30 deg	7
0.3	5	Med.Dense	32 deg	8
0.4	12	Dense	36 deg	21
0.5	14	Dense	37 deg	25
	Refusal			

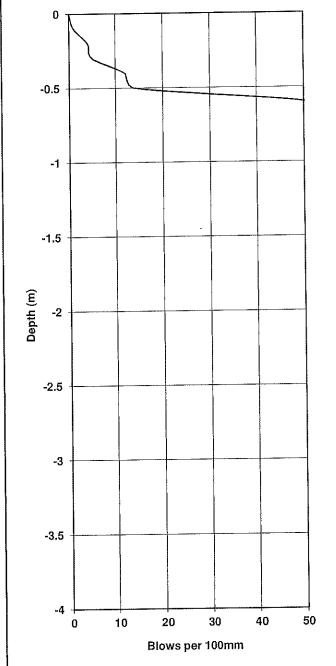





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

Ref.No. 237-2019

21

Date: 4-Oct-2019 Operator: S.Chattergoon


Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Penetrometer Probe -----Test No. DC

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	4	Med.Dense	30 deg	7
0.2	14	Dense	37 deg	25
0.3	14	Dense	37 deg	25
0.4	16	Dense	37 deg	29
0.5	21	Dense	38 deg	40
0.6	26	Very Dense	>38 deg	51
0.7	24	Dense	38 deg	47
	Refusal			

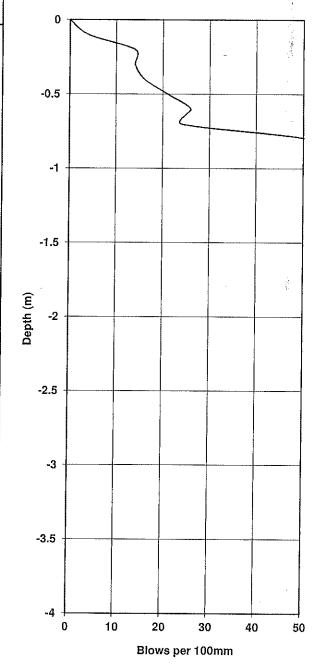

Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

(Pty) Lta

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

CBR Penetrometer Probe

Test No. DC 22

Test No. DC 22

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	3	Loose	<30 deg	5
0.2	3	Loose	<30 deg	5
0.3	4	Med.Dense	30 deg	7
0.4	17	Dense	37 deg	31
1	Refusal			

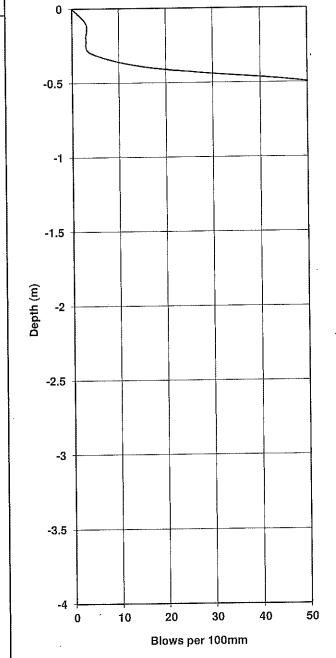





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No.DC 23

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	3	Loose	<30 deg	5
0.2	2	Loose	<30 deg	3
0.3	4	Med.Dense	30 deg	7
0.4	18	Dense	37 deg	33
	Refusal			

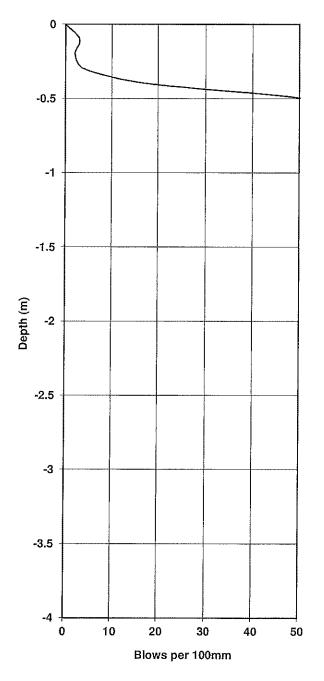



Geotechnical Engineering Consultants

Fax: 086 689 5506 Tel: (031) 266 0458

Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:


Project: Staff Housing for Murchison Hopsital at Section: Murchison Mission, Marburg

Penetrometer Probe -----CBR

Test No. DC

24

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	4	Med.Dense	30 deg	7
0.2	3	Loose	<30 deg	5
0.3	3	Loose	<30 deg	5
0.4	16	Dense	37 deg	29
0.5	18 ,	Dense	37 deg	33
	Refusal			

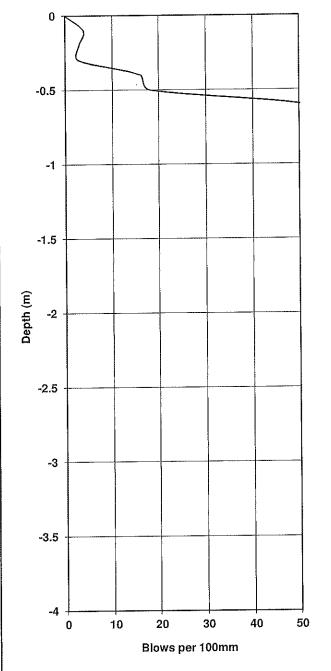





Geotechnical Engineering Consultants

Client:

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Naidu Consulting Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Operator: S.Chattergoon

CBRPenetrometer *Probe* -----

Test No. DC 25

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	2	Loose	<30 deg	3
0.2	4	Med.Dense	30 deg	7
0.3	3	Loose	<30 deg	5
0.4	9	Med.Dense	35 deg	15
	Refusal			

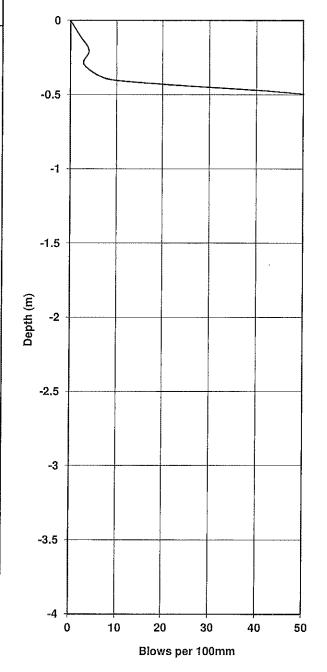

Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za



Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:


Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Penetrometer CBRProbe -----

26 Test No. DC

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	2	Loose	<30 deg	3
0.2	3	Loose	<30 deg	5
0.3	3	Loose	<30 deg	5
0.4	16	Dense	37 deg	29
	Refusal			

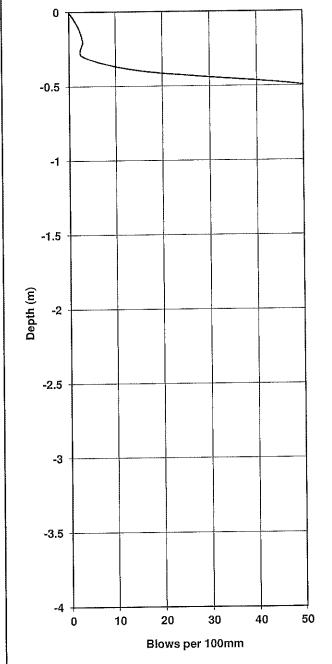





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

(Pty) Lta

Client: Naidu Consulting Ref.No. 237-2019

Project: Staff Housing for Murchison Hopsital at


Date: 4-Oct-2019
Section: Murchison Mission Markung

Section: Murchison Mission, Marburg Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No. DC 27

	Depth	Blows/	Inferred	Shear	CBR
	(m)	100mm	Consistency	Strength	%
	0				
	0.1	6	Med.Dense	33 deg	10
	0.2	4	Med.Dense	30 deg	7
	0.3	3	Loose	<30 deg	5
i		Refusal			
	•				

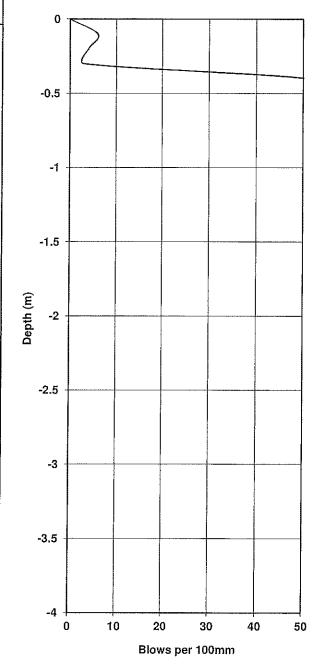




Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 08

Fax: 086 689 5506

Email: info@geosure.co.za



Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

CBR Penetrometer Probe

Test No.DC 2

28

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	4	Med.Dense	30 deg	7
0.2	4	Med.Dense	30 deg	7
0.3	7	Med.Dense	34 deg	12
0.4	9	Med.Dense	35 deg	15
	Refusal			

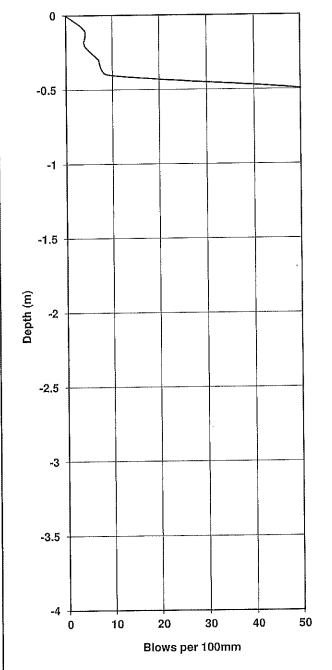



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: info@geosure.co.za

(Pty) Ltd

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Ref.No. 237-2019


Date: 4-Oct-2019

Operator: S.Chattergoon

CBR Penetrometer Probe-----

Test No.DC 29

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	8	Med.Dense	35 deg	14
0.2	10	Med.Dense	36 deg	17
0.3	18	Dense	37 deg	33
0.4	16	Dense	37 deg	29
0.5	9	Med.Dense	35 deg	15
0.6	11	Dense	36 deg	19
	Refusal			

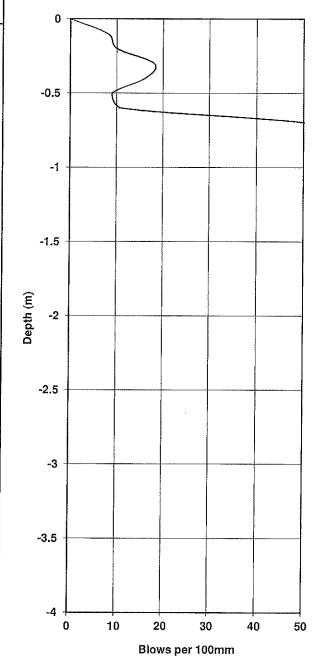



Geotechnical Engineering Consultants

Tel: (031) 266 0458

Email: info@geosure.co.za Fax: 086 689 5506

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting Client:

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

Penetrometer Probe -----CBR

Test No. DC

30

Depth (m)	Blows/ 100mm	Inferred Consistency	Shear Strength	CBR %
0				
0.1	6	Med.Dense	33 deg	10
0.2	8	Med.Dense	35 deg	14
0.3	14	Dense	37 deg	25
0.4	16	Dense	37 deg	29
	Refusal			

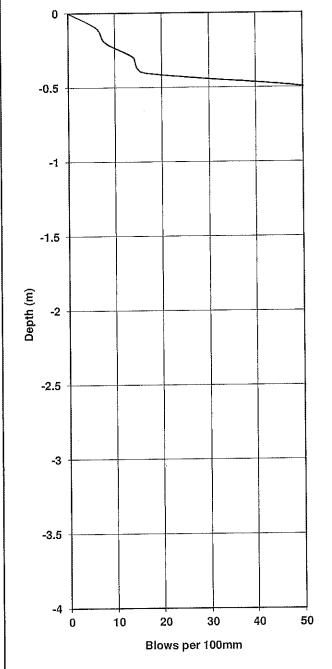





Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 4-Oct-2019

Operator: S.Chattergoon

Naidu Consulting

Project: Staff Housing for Murchison Hopsital at


Section: Murchison Mission, Marburg

CBRPenetrometer Probe -----

Test No.DC

31

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	5	Med.Dense	32 deg	8
0.2	4	Med.Dense	30 deg	7
0.3	3	Loose	<30 deg	5
0.4	16	Dense	37 deg	29
0.5	31	Very Dense	>38 deg	>55
	Refusal			

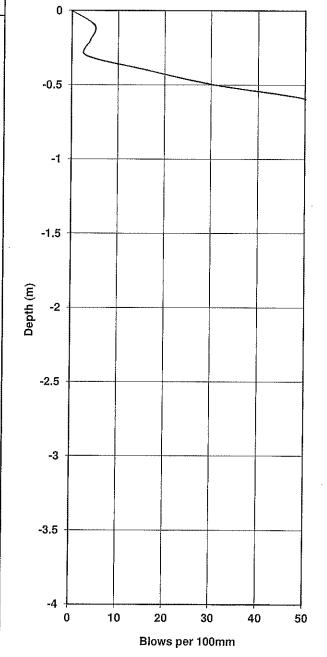



Geotechnical Engineering Consultants

Tel: (031) 266 0458 Fax: 086 689 5506

Email: Info@geosure.co.za

Ref No.

Client: Naidu Consulting

Project: Staff Housing for Murchison Hopsital at

Section: Murchison Mission, Marburg

Ref.No. 237-2019

Date: 2-Oct-2019


Operator: S.Chattergoon

CBR Penetrometer Probe -----

Test No.DC 32

32

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	2	Loose	<30 deg	3
0.2	5	Med.Dense	32 deg	8
0.3	3	Loose	<30 deg	5
0.4	4	Med.Dense	30 deg	7
0.5	6	Med.Dense	33 deg	10
0.6	4	Med.Dense	30 deg	7
0.7	6	Med.Dense	33 deg	10
8.0	4	Med.Dense	30 deg	7
0.9	3	Loose	<30 deg	5
1	4	Med.Dense	30 deg	7
1.1	4	Med.Dense	30 deg	7
1.2	6	Med.Dense	33 deg	10
1.3	17	Dense	37 deg	31
1.4	42	Very Dense	>38 deg	>55
	Refusal			

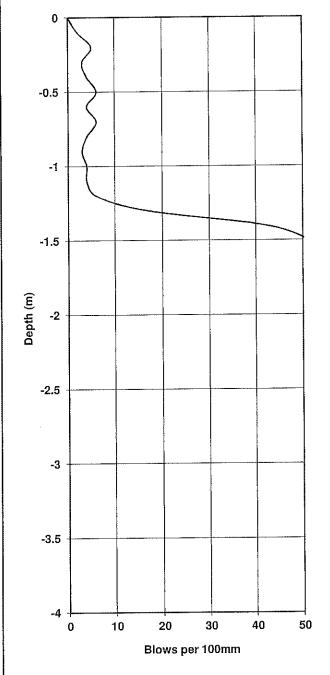

Geotechnical Engineering Consultants

Client:

Tel: (031) 266 0458 Fax: 086 689 5506 Email: info@geosure.co.za

Ref.No. 237-2019

Date: 2-Oct-2019

Operator: S.Chattergoon

Section: Murchison Mission, Marburg


Naidu Consulting

Penetrometer Probe -----CBR

Project: Staff Housing for Murchison Hopsital at

Test No.DC 33

Depth	Blows/	Inferred	Shear	CBR
(m)	100mm	Consistency	Strength	%
0				
0.1	3	Loose	<30 deg	5
0.2	6	Med.Dense	33 deg	10
0.3	5	Med.Dense	32 deg	8
0.4	6	Med.Dense	33 deg	10
0.5	6	Med.Dense	33 deg	10
0.6	7	Med.Dense	34 deg	12
0.7	8	Med.Dense	35 deg	14
0.8	7	Med.Dense	34 deg	12
0.9	6	Med.Dense	33 deg	10
1	10	Med.Dense	36 deg	17
1.1	9	Med.Dense	35 deg	15
1.2	11	Dense	36 deg	19
1.3	29	Very Dense	>38 deg	>55
1	Refusal			

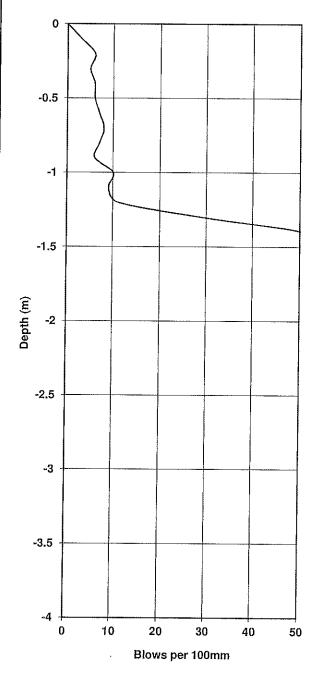

APPENDIX C

LABORATORY TEST RESULTS







CLIENT

: Geosure (Pty) Ltd

PHYSICAL ADDRESS: 122 Intersite Avenue, Springfield Park,

Umgeni

Durban, 4001

ATTENTION

: Mr D. Naidoo

PROJECT

: Staff Housing near Murchison Hospital, Marburg

TEST REPORT REFERENCE NUMBER: 47278

Dear Sir/Madam,

Enclosed herewith, please find the original reports pertaining to the above-mentioned project.

Date Received	16.10	.2019					
Date Tested	17.10.2019 to 25.10.2019						
Sample Location	Refer	to Report					
Sampling Method	N/A						
Sample Condition	Moist						
Sampling Environmental Condition	N/A						
Sampler(s) Name	Client						
Total Number of Pages	18						
	Test Carried Out						
SANS3001 GR1		TMH1 Method C3					
SANS3001 GR10, GR12		TMH1 Method C4a					
SANS3001 GR30		TMH1 Method B6					
SANS3001 GR40		Hydrometer Analysis - ASTM D422					
TMH1 Method A10(b)		SABS1200 (Compactibility Factor)#					
TMH1 Method A13T + A14app		SANS 5862-1	***************************************				
TMH1 Method A15d		SANS 5860, 5861-1, 5861-2, 5861-3					
TMH1 Method A13T + A16T		TMH1 Method B9					
- Tick denotes tests that were carried ou	ıt.	#Denotes non accredited tests					

We would like to take this opportunity of thanking you for your continued support. Should you have any queries please do not hesitate to contact me.

Yours faithfully

Technical Signatory,

Dheeran Ramcharan for Geosure (Pty) Ltd.

This report may not be reproduced except in full, without written permission from Geosure (Pty) Ltd. While every care is taken to ensure the correctness of all tests and reports, neither Geosure (Pty) Ltd or its employees shall be liable in any way whatsoever for any error made in the execution or reporting of tests or any erroneous conclusions drawn there from or any consequence thereof. This report relates only to the sample/s tested.

Head Office 122 Intersite Avenue, Umgeni Business Park, Durban 4091, South Africa

PO Box 1461, Westville, 3630, South Africa

+27 (0)861 GEOSURE / 0861 436 7873 Tel.:

+27 (0)86 689 5506 Mobile: +27 (0)82 784 0544 E-mail: geosure@iafrica.com

Civil Engineering Laboratory 122 Intersite Avenue, Umgeni Business Park, Durban, 4091, South Africa

PO Box 1461, Westville, 3630, South Africa

031 701 9732 Tel:

+27 (0) 86 684 9785 Mobile: 072 870 2621 lab@geosure.c

Gauteng Branch

O. Box 32381, Kyalami 1684

Tel.: 0861 GEOSURE / 0861 436 7873 ax: 086 689 8327

Mobile: 083 377 6559 Email: gauteng@geosure.co.za



E-mall:





_ABORATORY AND HEAD OFFICE ADDRESS:

LABORATORY CONTACT INFO.:

HEAD OFFICE CONTACT INFO.:

Reg.No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

Tel.: +27(0) 31 701 9732 Mobile: +27(0) 72 870 2621

Fax: 086 684 9785 e-mail: lab@geosure.co.za

Tel.: +27(0) 31 266 0458 Mobile: +27(0) 82 784 0544 Fax: 086 689 5506 e-mail:geosure@lafrlca.com

www.geosure.co.za

WEBSITE: Client

: Geosure (Pty) Ltd

Our Ref. : 47278 Your Ref. : 237-19

Project

: Staff Housing near Murchison Hospital

Date Tested : 17.10.2019 to 25.10.2019

Marburg

Attention	: Mr D. Naldoo Date Reported : 28.10.2019						
Sample No.			T22375	T22378	T22380	T22381	T22382
Field No.			IP4	IP3	IP10	IP10	IP11
Position in Field			Layer 2	Layer 3	Layer 1	Layer 2	Layer 2
Depth (m)			0,25-0.59	0.67-1.15	0.01-0.30	0.30-0.46	0.29-0.60
Material Description		Dark yellow mottled orange speckled light yellow completely to highly sandy CLAY. Ferricrete son to soft rock. SANDSTONE (Nate		Light greyish brown SANDY silty CLAY. Colluvium	Brown blotched purple and orange clayey sandy GRAVEL. Ferricrete	Light yellow speckled white mottled light orange highly weathered very soft to soft rock SANDSTONE (Nate Group)	
	Sie	ve Analysis	(Wet Preparation)	- SANS3001 GR 1	- Percent Passing	Sieve Size	
	100.0	mm	100	100	100	100	100
75.0 mm		mm	100	100	100	100	100
	63.0	mm	100	100	100	100	97
50.0 mm		100	100	100	100	91	

	0.0		V 45-44-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-				
	100.0	mm	100	100	100	100	100
	75.0	mm	100	100	100	100	100
	63.0	mm	100	100	100	100	97
	50.0	mm	100	100	100	100	91
	37.5	mm	100	100	100	100	87
ğ	28.0	mm	100	100	100	100	84
Passing	20.0	mm	98	100	100	100	79
g S	14.0	mm	93	100	97	100	69
ж В	5.00	mm	50	96	57	96	63
8	2.00	mm	24	86	37	94	59
	0.425	mm	14	68	22	67	25
	0.250	mm	12	60	15	44	16
	0.150	mm	11	54	12	33	11
	0.075	mm	10	49	10	27	8
	0.010		.1		Love		

		Hydromet	er Analysis - ASTM - D4	122 - Percent Passing I	Particle Diameter	(<0.425mm)	
	F	0.060 ms	n 9	46	9	25	8
		0.050 mi		43	8	24	8
<u> </u>		0.040 mi		41	8	23	8
	<u>5</u>	0.026 mi		38	7	21	7
	Ni Ni	0.015 mi		31	5	17	6
	Š	0.010 mi		27	4	15	5
	ا فر	0.0074 mi		24	3	13	4
	%	0.0074 mi		20	2	9	2
	l .	0.0030 611		20			

<u> </u> -	0.0020	mm	3	17	2 i	6	2			
_	0.0025	mm	3	16	2	5	2			
	Mechanica	Mechanical analysis - SANS3001 GR1 - Percent of Soll Mortar (<2 mm) for Grain Size range								
Coarse Sand		%	40	21	41	29	59			
Coarse Fine Sand		%	7	10	18	24	15			
Medium Fine Sand		%	4	7	9	12	8			
Fine Fine Sand		%	4	5	5	7	6			
Silt & Clay		%	44	57	26	29	13			
				0.00	0.04	1 19	208			

Grading Modulus		2.52	0.96	2,31	1,12	2,00			
	Att	erberg Limits - SA	NS3001 GR10, GR	12 (<0.425mm)					
Liquid Limit	%	35 ·	40	30	26	NP			
Plasticity Index	%	10	14	8	9	NP			
Linear Shrinkage		6.0	7.0	4.0	3.0	0.0			
AASHTO Classification (Group Index)*			A-2-4 (0) A-6	A-6 (4)	A-2-4 (0)	A-2-4 (0) SC	A-1-b (0) SP-SM		
Unified Classifica		GP-GM	SM	SP-SC					
Moisture Content %		6.0	13.5	12.0	8.7	6.1			
Remarks:	Date Received: 16.10.2019								
	Sampled by Client.								
	15 - 15 fell subside the george of CANAS accorditation								

*Opinions expressed herein fall outside the scope of SANAS accreditation.

This report relates only to sample(s) received. This report shall not be reproduced, except in full, without the prior consent of GEOSURE (PTY) LTD.







Reg.No.: 92/03145/07



LABORATORY AND HEAD OFFICE ADDRESS:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO.:

HEAD OFFICE CONTACT INFO .:

Tel.: +27(0) 31 701 9732

Mobile: +27(0) 72 870 2621

Tel.: +27(0) 31 266 0458

Mobile: +27(0) 82 784 0544

www.geosure.co.za

Fax: 086 684 9785

e-mail: lab@geosure.co.za

Fax: 086 689 5506

e-mail:geosure@iafrica.com

WEBSITE: Client

Attention

: Geosure (Pty) Ltd

Project : Staff Housing near Murchison Hospital

Marburg

: Mr D. Naidoo

Job No. : 47278

Your Ref. No.: 237-19

Date Tested : 17.10.2019 to 25.10.2019

Date Reported: 28.10.2019

Sample Number


: T22375


Field No. Sample Description

Equivalent PI

: IP4

: Dark brown speckled orange gravelly sandy CLAY. Ferricrete 【 Clay fraction of whole sample (% <2μ) :

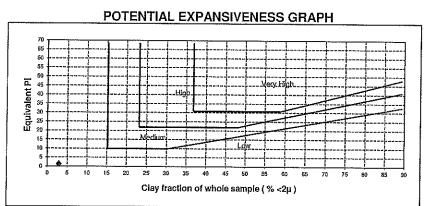

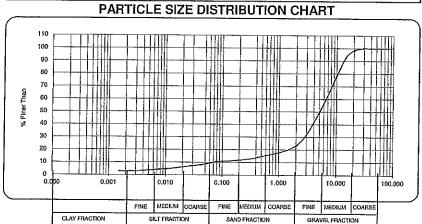





LABORATORY AND HEAD OFFICE ADDRESS:

Reg.No.: 92/03145/07 122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO .:

Tel.: +27(0) 31 701 9732

Mobile: +27(0) 72 870 2621

Fax: 086 684 9785 e-mail: lab@geosure.co.za

HEAD OFFICE CONTACT INFO .:

Tel.: +27(0) 31 266 0458

e-mail:geosure@iafrica.com

Mobile: +27(0) 82 784 0544

Fax: 086 689 5506

WEBSITE:

www.geosure.co.za

Client

: Geosure (Pty) Ltd

: Mr D. Naidoo

Job No.: 47278

Project

: Staff Housing near Murchison Hospital

Your Ref.No. : 237-19

Date Tested: 17.10.2019 to 25.10.2019

Date Reported: 28.10.2019

Sample Number

: T22378

Field No.

Attention


: IP3


Sample Description

: Dark yellow mottled orange speckled light yellow completely to highly weathered very soft to soft I

Equivalent Pl

Clay fraction of whole sample (% <2µ)

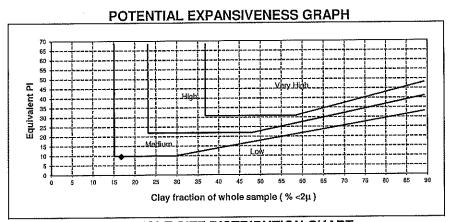

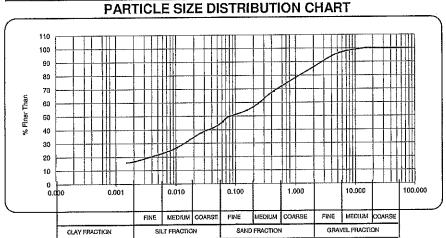









Reg.No.: 92/03145/07

LABORATORY AND HEAD OFFICE ADDRESS: 122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO.:

HEAD OFFICE CONTACT INFO .:

Tel.: +27(0) 31 701 9732

Mobile: +27(0) 72 870 2621

Tel.: +27(0) 31 266 0458

Mobile: +27(0) 82 784 0544

www.geosure.co.za

Fax: 086 684 9785

e-mail: lab@qeosure.co.za

Fax: 086 689 5506

e-mail:geosure@iafrica.com

WEBSITE: Client

Project

Attention

Field No.

: Geosure (Pty) Ltd

: Staff Housing near Murchison Hospital

Marburg

Mr D. Naidoo

Your Ref.No. : 237-19

Job No.: 47278

Date Tested : 17.10.2019 to 25.10.2019

Date Reported: 28.10.2019

Sample Number

: T22380 : IP10

Sample Description


: Light greyish brown SANDY silty CLAY. Colluvium


Equivalent Pl

2

Clay fraction of whole sample (% <2µ) :

2

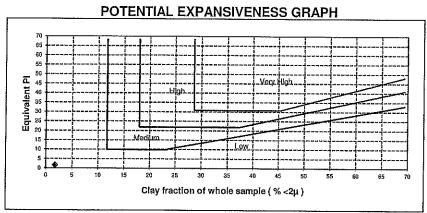

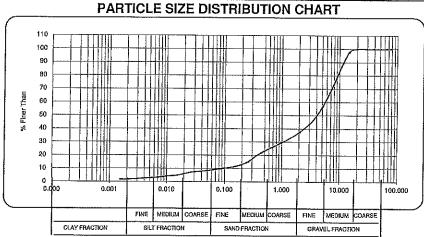





Reg.No.: 92/03145/07

LABORATORY AND HEAD OFFICE ADDRESS:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO.:

Tel.: +27(0) 31 701 9732

Fax: 086 684 9785

Mobile: +27(0) 72 870 2621

e-mall: lab@geosure.co.za

HEAD OFFICE CONTACT INFO.:

Tel.: +27(0) 31 266 0458

Fax: 086 689 5506

Mobile: +27(0) 82 784 0544

www.qeosure.co.za

e-mail:geosure@lafrica.com

WEBSITE: Client

: Geosure (Pty) Ltd

Job No.: 47278

Project

Attention

: Staff Housing near Murchison Hospital

Your Ref.No. : 237-19

Date Tested: 17.10.2019 to 25.10.2019

: Mr D. Naidoo

Date Reported: 28.10.2019

Sample Number

: T22381

Field No.

: IP10


Sample Description

: Brown blotched purple and orange clayey sandy GRAVEL. Ferricrete


Equivalent Pl

6 Clay fraction of whole sample (% <2μ) :



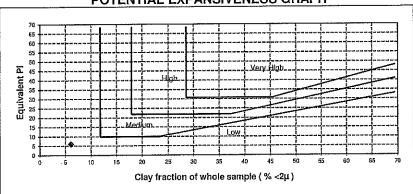

PARTICLE SIZE DISTRIBUTION CHART

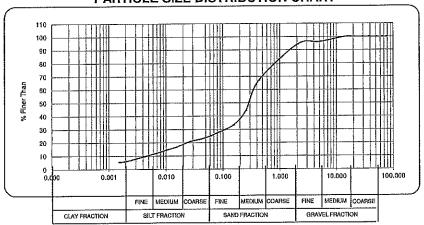





LABORATORY AND HEAD OFFICE ADDRESS:

Reg.No.: 92/03145/07 122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO.:

Tel.: +27(0) 31 701 9732

Mobile: +27(0) 72 870 2621

Fax: 086 684 9785 e-mail: lab@geosure.co.za

HEAD OFFICE CONTACT INFO .:

Tel.: +27(0) 31 266 0458

Fax: 086 689 5506

Mobile: +27(0) 82 784 0544

www.geosure.co.za

e-mail:geosure@iafrica.com

WEBSITE: Client

: Geosure (Pty) Ltd

Job No. : 47278

Project : Staff Housing near Murchison Hospital · Your Ref.No. : 237-19

Marburg

Date Tested : 17.10.2019 to 25.10.2019

: Mr D. Naidoo

Date Reported: 28.10.2019

Sample Number

: T22382 : IP11


Field No. Sample Description


Attention

: Light yellow speckled white mottled light orange highly weathered very soft to soft rock. SANDSTC

Equivalent PI

Clay fraction of whole sample (% $<2\mu$)

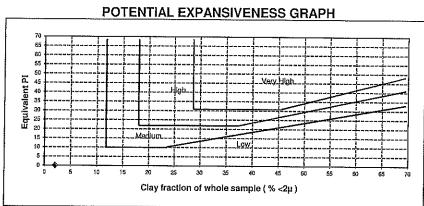

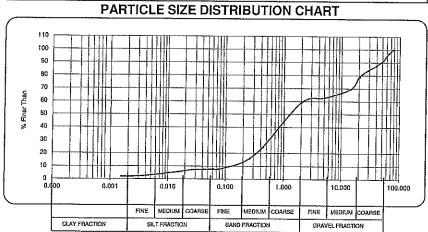





Reg.No.: 92/03145/07

LABORATORY AND HEAD OFFICE ADDRESS:

LABORATORY CONTACT INFO.: HEAD OFFICE CONTACT INFO.:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

Tel.: +27(0) 31 701 9732 Mobile: +27(0) 72 870 2621 Fax: 086 684 9785 e-mail: lab@geosure.co.za

Tel.: +27(0) 31 266 0458 Mobile: +27(0) 82 784 0544

Fax: 086 689 5506 e-mail:geosure@iafrica.com

www.geosure.co.za WEBSITE:

Client Project : Geosure (Pty) Ltd

Our Ref.: 47278 Your Ref. : 237-19

: Staff Housing near Murchison Hospital

43

33

27

Marburg

Date Tested: 17.10.2019 to 25.10.2019

Attention	: Mr D. Naidoo			Date Reported: 28.10.2019
Sample No.			T22384	
Field No.			IP13	
Position in Field			Layer 1	
Depth (m)			0.01-0.20	
Materiai Description	Sie	vo Ameluala	Greyish brown graveliy clayey silty SAND. Fill	- SANS3001 GR 1 - Percent Passing Sieve Size
			1	- SANSSOUT GR (- Percent rassing dieve cize
	100.0	mm	100	
	75.0	mm	100	
	63.0	mm	100	
	50.0	mm	100	
F	37.5	mm	100	
Ĕ	28.0	mm	100	
SS	20.0	mm	98	
ğ	14.0	mm	97	
% Passing	5,00	mm	89	
•	2,00	mm	81	
	0.425	mm	56	

Hydrometer Analysis - ASTM - D422 - Percent Passing Particle Diameter (<0.425mm)

	,		
	0.060 mr	п 26	
	0.050 mr	n 26	
	0.040 mr	n 26	
ŋū	0.026 mr	n 25	
SSi	0.015 mr	n 21	
ğ	0.010 mr	n 18	
8	0.0074 mr	n 15	
•	0.0036 mr	n 12	
	0.0020 mi	n 9	
	0.0015 ma	n 8	

Mechanical analysis - SANS3001 GR1 - Percent of Soil Mortar (<2 mm) for Grain Size range

Coarse Sand	%	30	
Coarse Fine Sand	%	17	
Medium Fine Sand	%	13	
Fine Fine Sand	%	7	
Silt & Clay	%	33	
Grading Modulus		1,36	

Atterberg Limits - SANS3001 GR10, GR12 (<0.425mm)

			· ·	
Liquid Limit	%	30		
Plasticity Index	%	10		
Linear Shrinkage	%	5.0		
AASHTO Classification (C	Group Index)*	A-2-4 (0)		
Unified Classification*		SC		
Moisture Content	%	8.9		
Remarks: Date F	Received: 16.10.20	19		

Sampled by Client.

0,250

0.150 0.075 mm

mm

*Opinions expressed herein fall outside the scope of SANAS accreditation.

This report relates only to sample(s) received. This report shall not be reproduced, except in full, without the prior consent of GEOSURE (PTY) LTD.

Page 8 of 18







Reg.No.: 92/03145/07

LABORATORY AND HEAD OFFICE ADDRESS: 122 Intersite Avenue, Umgeni Business Park, Durban, 4091

LABORATORY CONTACT INFO.:

Tel.: +27(0) 31 701 9732 Fax: 086 684 9785 Mobile: +27(0) 72 870 2621

e-mail: lab@geosure.co.za

HEAD OFFICE CONTACT INFO.:

Tel.: +27(0) 31 266 0458

Fax: 086 689 5506

Mobile: +27(0) 82 784 0544

www.geosure.co.za

e-mall:geosure@lafrica.com

WEBSITE: Client

: Geosure (Pty) Ltd

Job No. : 47278

Project

Attention

: Staff Housing near Murchison Hospital

Your Ref.No. : 237-19

Date Tested : 17.10.2019 to 25.10.2019

Marburg : Mr D. Naidoo

Date Reported: 28.10.2019

Sample Number

: T22384

Field No.

: IP13


Sample Description

: Greyish brown gravelly clayey silty SAND. Fill


Equivalent Pl

Clay fraction of whole sample (% <2µ)

POTENTIAL EXPANSIVENESS GRAPH

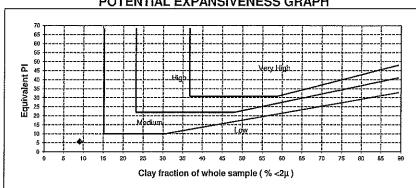

PARTICLE SIZE DISTRIBUTION CHART

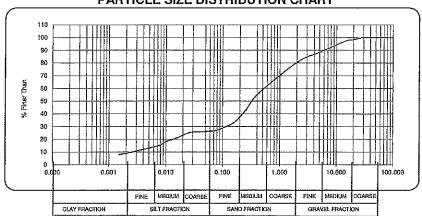



Reg. No.: 92/03145/07

| Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 92 | Reg. No. : 9

Fax: 086 684 9785 email: lab@geosure.co.za HEAD OFFICE: 122 Intersite Avenue, Umgent Business Park, Ourban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506 email: geosure@iafrica.com www.geosure.co.za

Cllent

Project Attention : Geosure (Pty) Ltd : Staff Housing near Murchison Hospital, Marburg

: Mr D. Naldoo

Your Ref No.: 237-19 Our Ref No.: 47278 Date Reported: 30/10/2019

W. L. L. HARRISTE.	Test Repor	t - SANS 3	001		
Sample No.	T22376	T22377	T22379	T22383	
Field No.	IP4	IP3	IP5	IP9	
Position	Layer 3	Layer 2	Layer 2	Layer 3	
Depth (m)	0,59-0.90	0.39-0.67	0.27-0.59	0.51-0.86	
Method of Preparation	N/A	Scalped	N/A	Scalped	
Material Description	Dark purple and light pink mottled dark yellow speckled white highly weathered very soft to soft rock. SANDSTONE (Natal Group)	speckied	Brown blotched purple and orange clayey sandy GRAVEL. Ferricrete	Light pink speckled white mottled dark pink blotched yellow moderately weathered soft rock. SANDSTONE (Natal Group)	

	Slev	e Analysis - Per	cent Passing S	leve Size		
	100.00					
	75.00					
	63.00				100	
ļ	53.00				97	
_	50.00		100	PERMIT	97	
Ē	37.50		99	100	97	
u);	28.00		99	99	96	
an	26.50		99	99	96	
il	20.00		99	99	94	
Sieve Aperture (mm)	19.00	100	99	99	94	
a	14.00	97	98	97	86	
ije	13.20	97	98	97	86	
Ø	5,00	79	93	· 77	71	
	4.750	79	93	77	71	
	2.000	71	90	68	66	
	0.425	34	69	48	32	
	0.075	16	38	23	9	
Grading Modulus		1.79	1.02	1.60	1.93	
Mecl		s - Percent of S		m) for Grain Siz		
Coarse Sand	2.000 - 0.425	52	23	30	52	
Coarse-Fine Sand	0.425 - 0.250	14	15	18	21	
Medium-Fine Sand	0.250 - 0.150	7	10	11	9	
Fine-Fine Sand	0.150 - 0.075	5	9	7	5	
Silt and Clay	< 0.075	23	42	34	13	
		rg Limits SANS				
Liquid Limit	% or symbol	30	40	29	SP	
Plasticity Index	% or symbol	12	14	10	SP	
Linear Shrinkage	%	6.0	7.0	5.0	0,5	
	Maximun	n Dry Density an				
Maximum Dry Density (kg/m³)		1994	1782	2015	1952	
Optimum moisture content	(%)	10.4	11.3	9.7	7.3	
California Bearing Ratio						
CBR @100% Compaction	%	55	29	27	52	
CBR @ 98% Compaction	%	35	21	23	39	
CBR @ 97% Compaction	%	28	18	21	34	
GBR @ 95% Compaction	%	18	13	17	25	
CBR @ 93% Compaction	%	12	9.8	15	19	
CBR @ 90% Compaction	%	6.0	6.2	11	12	
Swell @100% Compaction	%	0.0	0.9	0.1	0.0	
COLTO Classification (1998)†"		G8 (#)	Cannot be Determined	G8 (#)	G6 (#)	
TRH 14 Classification (1985)"		G10	G10	G8	G7	
AASHTO Classification (Group Index)**		A-2-6 (0)	A-6 (2)	A-2-4 (0)	A-1-b (0)	
Unified Classification **		SC	SM	SC	SW-SM	

This report relates only to sample(s) received. This report shall not be reproduced, except in full, without the prior consent of GEOSURE (Pty) Ltd.

*Subject to further testing as required by TRH14. Remarks:

Testing as required by COLTO. COLTO above uses only: Atterberg Limits (<0.425 mm fraction; not arithmetic mean), Nominal Max Size, Grading Curve, Coarse Sand Ratio, Grading Modulus, Strength (CBR), and Swell.

^{*} Check that Max Size <= 2/3 of compacted layer thickness.

[&]quot;Opinions and interpretations expressed herein are outside the scope of SANAS accreditation Version 5.05 - 14 February 2018



Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630

Mobile: +27(0)72 870 2621 Tel.: +27 (0)31 701 9732

Fax: 086 684 9785 email: lab@geosure.co.za HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506 email: geosure@iafrica.com www.geosure.co.za

Client Project : Geosure (Pty) Ltd


: Staff Housing near Murchison Hospital, Marburg

Attention : Mr D. Naidoo

Our Ref No.: 47278

Your Ref No.: 237-19 Date Reported: 30/10/2019

Grading Curve for Sample T22376 – SANS 3001

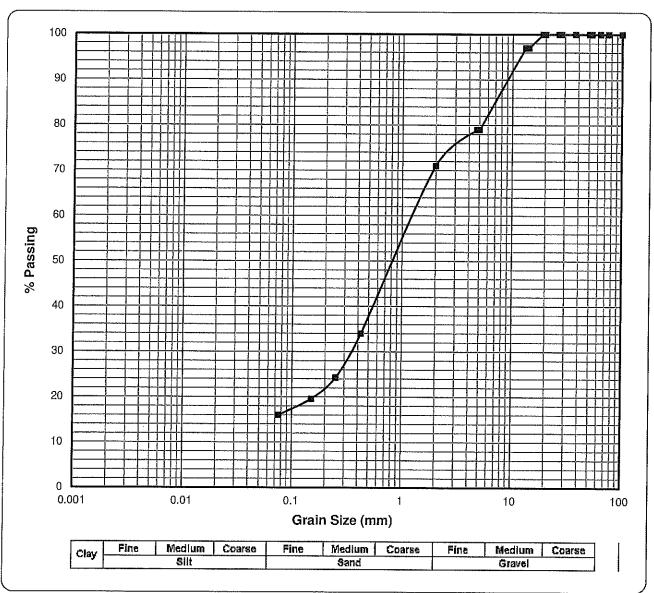

Thick Red Line is the Grading Curve (COLTO Classification = G8 (#)) (TRH 14 Classification = G10)

Sieve Aperture Size Percentage Passing 0.075 0.150 0.250 0.425 2.00 4.75 5.00 13.20 14.00 19.00 20.00 26.50 28.0 37.5 50.0 53.0 63







Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630

Mobile: +27(0)72 870 2621 Tel.: +27 (0)31 701 9732

Fax: 086 684 9785

email: lab@geosure.co.za

HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506 email: geosure@iafrica.com www.geosure.co.za


: Geosure (Pty) Ltd

Client : Staff Housing near Murchison Hospital, Marburg Project

Attention : Mr D. Naidoo

Your Ref No.: 237-19 Our Ref No.: 47278 Date Reported: 30/10/2019

Grading Curve for Sample T22377 - SANS 3001

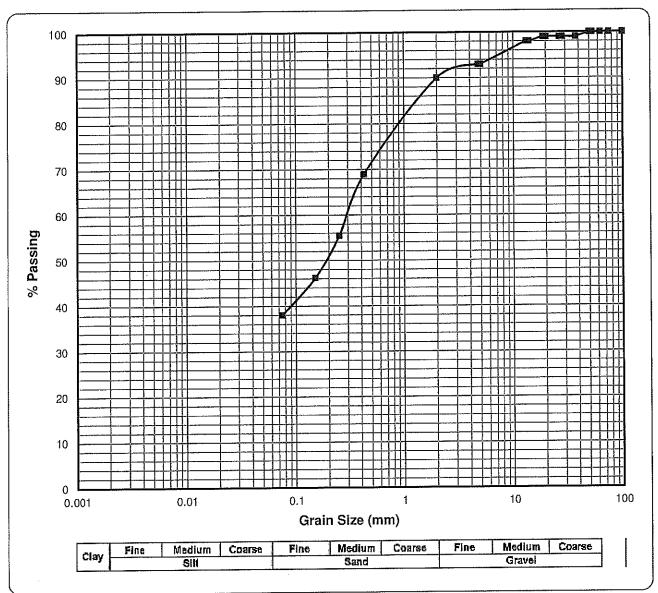

Thick Red Line is the Grading Curve (COLTO Classification = Cannot be Determined) (TRH 14 Classification = G10)

Sieve Aperture Size Percentage Passing 0.075 0.150 0.015 0.026 0.05 0.06 5.00 13.20 14.00 19.00 20.00 26.50 28.0 37.5 50.0 53.0 63



Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630

Mobile: +27(0)72 870 2621 Tel.: +27 (0)31 701 9732 Fax: 086 684 9785 email: <u>lab@geosure.co.za</u> HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506 email: geosure@iafrica.com www.geosure.co.za

Client : Geosure (Pty) Ltd


Project : Staff Housing near Murchiso

: Staff Housing near Murchison Hospital, Marburg

Attention: Mr D. Naidoo

Your Ref No.: 237-19 Our Ref No.: 47278 Date Reported: 30/10/2019

Grading Curve for Sample T22379 – SANS 3001

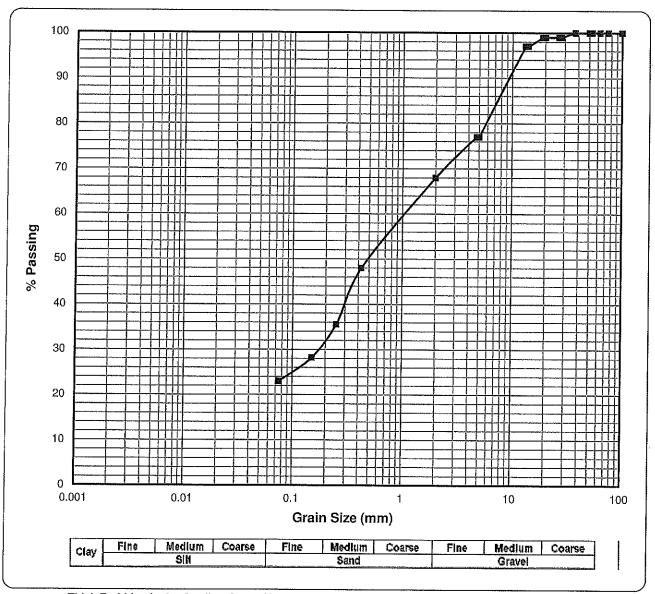

Thick Red Line is the Grading Curve (COLTO Classification = G8 (#)) (TRH 14 Classification = G8)

Sieve Aperture Size Percentage Passing 



Client

Project

Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630

Mobile: +27(0)72 870 2621 Tel.: +27 (0)31 701 9732

Attention : Mr D. Naidoo

Fax: 086 684 9785

email: lab@geosure.co.za

HEAD OFFICE:


122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa.
Tel: +27 (0)31 266 0458 Fax: 086 689 5506 email: geosure@iafrica.com www.geosure.co.za

.....

: Geosure (Pty) Ltd : Staff Housing near Murchison Hospital, Marburg Your Ref No.: 237-19 Our Ref No.: 47278

Date Reported: 30/10/2019

Grading Curve for Sample T22383 - SANS 3001

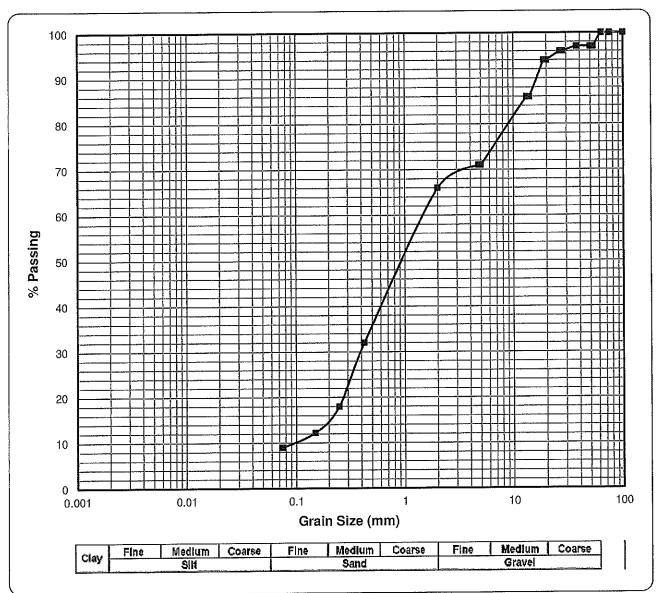

Thick Red Line is the Grading Curve (COLTO Classification = G6 (#)) (TRH 14 Classification = G7)

Sieve Aperture Size Percentage Passing 0.075 0.150 0.250 0.425 2.00 4.75 5.00 13.20 14.00 19.00 20.00 26.50 28.0 37.5 50.0 53.0 63 75 100 9% 12% 18% 32% 66% 71% 71% 86% 86% 94% 94% 96% 96% 97% 97% 97% 100% 100% 100%





Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630 Mobile: +27(0)72 870 2621

Tel.: +27 (0)31 701 9732

Fax: 086 684 9785

email: iab@geosure.co.za

HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506

email: geosure@lafrica.com www.geosure.co.za

Client

: Geosure (Pty) Ltd

Project

: Staff Housing near Murchison Hospital, Marburg

Attention : Mr D. Naidoo

Your Ref No.

: 237-19

Our Ref No.

: 47278

Date Reported

: 23.10.2019

SANS 3001 Moisture/Density Relationship

Sample No. Method of preparation : N/A Natural/Stabilised

Material Description

Maximum Dry Density (kg/m³)

: T22376

: Natural

Depth (m)

Field No. : IP4

Origin

: 0.59-0.90 : Layer 3


: Dk.Purp.Lt.Pi.Mott.Dk.Yell.Spec.Wht.Hi.Wth.very scCompaction Effort : Mod AASHTO

Optimum Moisture Content (%) 10.4

Plotted Values:

Moisture (%)	8.2	9.2	10.2	11.2	12.2
Dry Density (kg/m³)	1906	1929	1992	1967	1942

1994

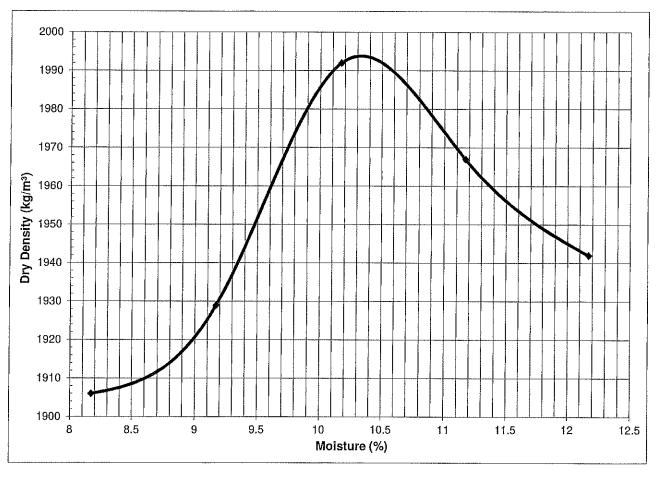

LABORATORY: Reg. No.: 92/03145/07
122 Intersite Avenue, Umgeni Business Park, Durban, 4091

P.O. Box 1461, Westville 3630 Mobile: +27(0)72 870 2621

Fax: 086 684 9785

Tel.: +27 (0)31 701 9732

email: <u>lab@geosure.co.za</u>

HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506

email: geosure@iafrica.com www.geosure.co.za

: Geosure (Pty) Ltd

Client Project

: Staff Housing near Murchison Hospital, Marburg

Attention : Mr D. Naidoo Your Ref No.

: 237-19

Our Ref No.

: 47278

Date Reported

: 22.10.2019

SANS 3001 Moisture/Density Relationship

Sample No.

: T22377

Method of preparation : Scalped

Natural/Stabilised Material Description : Natural

: Dk.Br.Spec.Or.gravelly sandy CLAY. Ferricrete

Field No.

: IP3

Depth (m)

: 0.39-0.67

Origin

: Layer 2

Compaction Effort

: Mod AASHTO


Maximum Dry Density (kg/m³)

1782

Optimum Moisture Content (%)

Plotted Values:

TOUGHT ALEGOET					
Moisture (%)	9.2	10.2	11.2	12.2	13.2
Dry Density (kg/m³)	1699	1726	1781	1757	1737

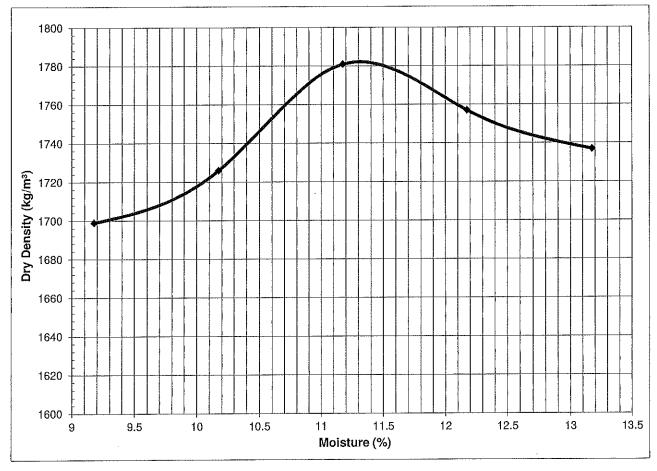

Remarks: This report relates only to sample(s) received. This report shall not be reproduced, except in

full, without the prior consent of GEOSURE (Pty) Ltd.

٠,١

Consulting Engineering Geologists, Geotechnical Engineers, Geotechnicians & Geotechnical Quality Assurance Specialists (Pty) Ltd

ABORATORY:

Reg. No.: 92/03145/07

122 Intersite Avenue, Umgeni Business Park, Durban, 4091 P.O. Box 1461, Westville 3630 Mobile: +27(0)72 870 2621 Fax: 086 684 9785

Tel.: +27 (0)31 701 9732

email: lab@geosure.co.za

HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506

email: geosure@iafrica.com www.geosure.co.za

Client

: Geosure (Pty) Ltd

Project

: Staff Housing near Murchison Hospital, Marburg

Attention : Mr D. Naidoo

Your Ref No.

: 237-19

Our Ref No.

: 47278

Date Reported

: 22.10.2019

SANS 3001 Moisture/Density Relationship

Sample No.

: T22379

Method of preparation: N/A Natural/Stabilised

: Natural

Material Description

: Br.Blot.Purp.Or.clayey sandy GRAVEL. Ferricrete Compaction Effort

Field No.

: IP5

Depth (m) Origin

: 0.27-0.59 : Layer 2

: Mod AASHTO

Maximum Dry Density (kg/m³)

2015

Optimum Moisture Content (%)

9.7

Plotted Values:

Moisture (%)	7.8	8.8	9.8	10.8	11.8
Dry Density (kg/m³)	1966	1996	2015	1990	1972





122 Intersite Avenue, Umgeni Business Park, Durban, 4091 P.O. Box 1461, Westville 3630 Mobile: +27(0)72 970 9991

Mobile: +27(0)72 870 2621

Tel.: +27 (0)31 701 9732

email: lab@geosure.co.za

HEAD OFFICE:

122 Intersite Avenue, Umgeni Business Park, Durban, 4091, KwaZulu Natal, South Africa. Tel: +27 (0)31 266 0458 Fax: 086 689 5506

email: geosure@iafrica.com www.geosure.co.za

Client

: Geosure (Pty) Ltd

Project

: Staff Housing near Murchison Hospital, Marburg

Attention : Mr D. Naidoo

Your Ref No.

: 237-19

Our Ref No.

: 47278

: 23.10.2019

Date Reported

SANS 3001 Moisture/Density Relationship

Sample No. Natural/Stabilised

Material Description

: T22383

Method of preparation : Scalped

: Natural : Lt.Pi.Spec.Wht.Mott.Dk.Pi.Blot.Yell.Mod.Wth.soft rcCompaction Effort

Field No. Depth (m) : IP9

: 0.51-0.86

Origin

: Layer 3 : Mod AASHTO

Maximum Dry Density (kg/m³)


1952

Optimum Moisture Content (%)

7.3

Plotted Values:

1 lottou varaou.					
Moisture (%)	5.3	6.3	7.3	8.3	9.3
Dry Density (kg/m³)	1897	1925	1952	1917	1888

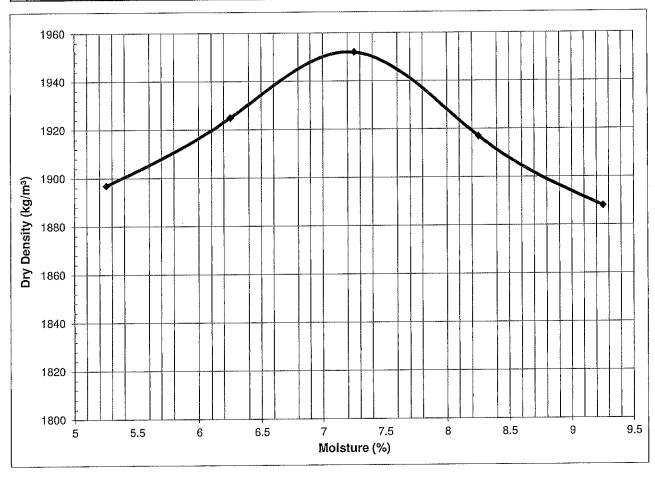

Remarks: This report relates only to sample(s) received. This report shall not be reproduced, except in full, without the prior consent of GEOSURE (Pty) Ltd.

v .,

SITE PLAN

FIGURE 1

